


ARVIN CAR RADIO — CHASSIS RE-86

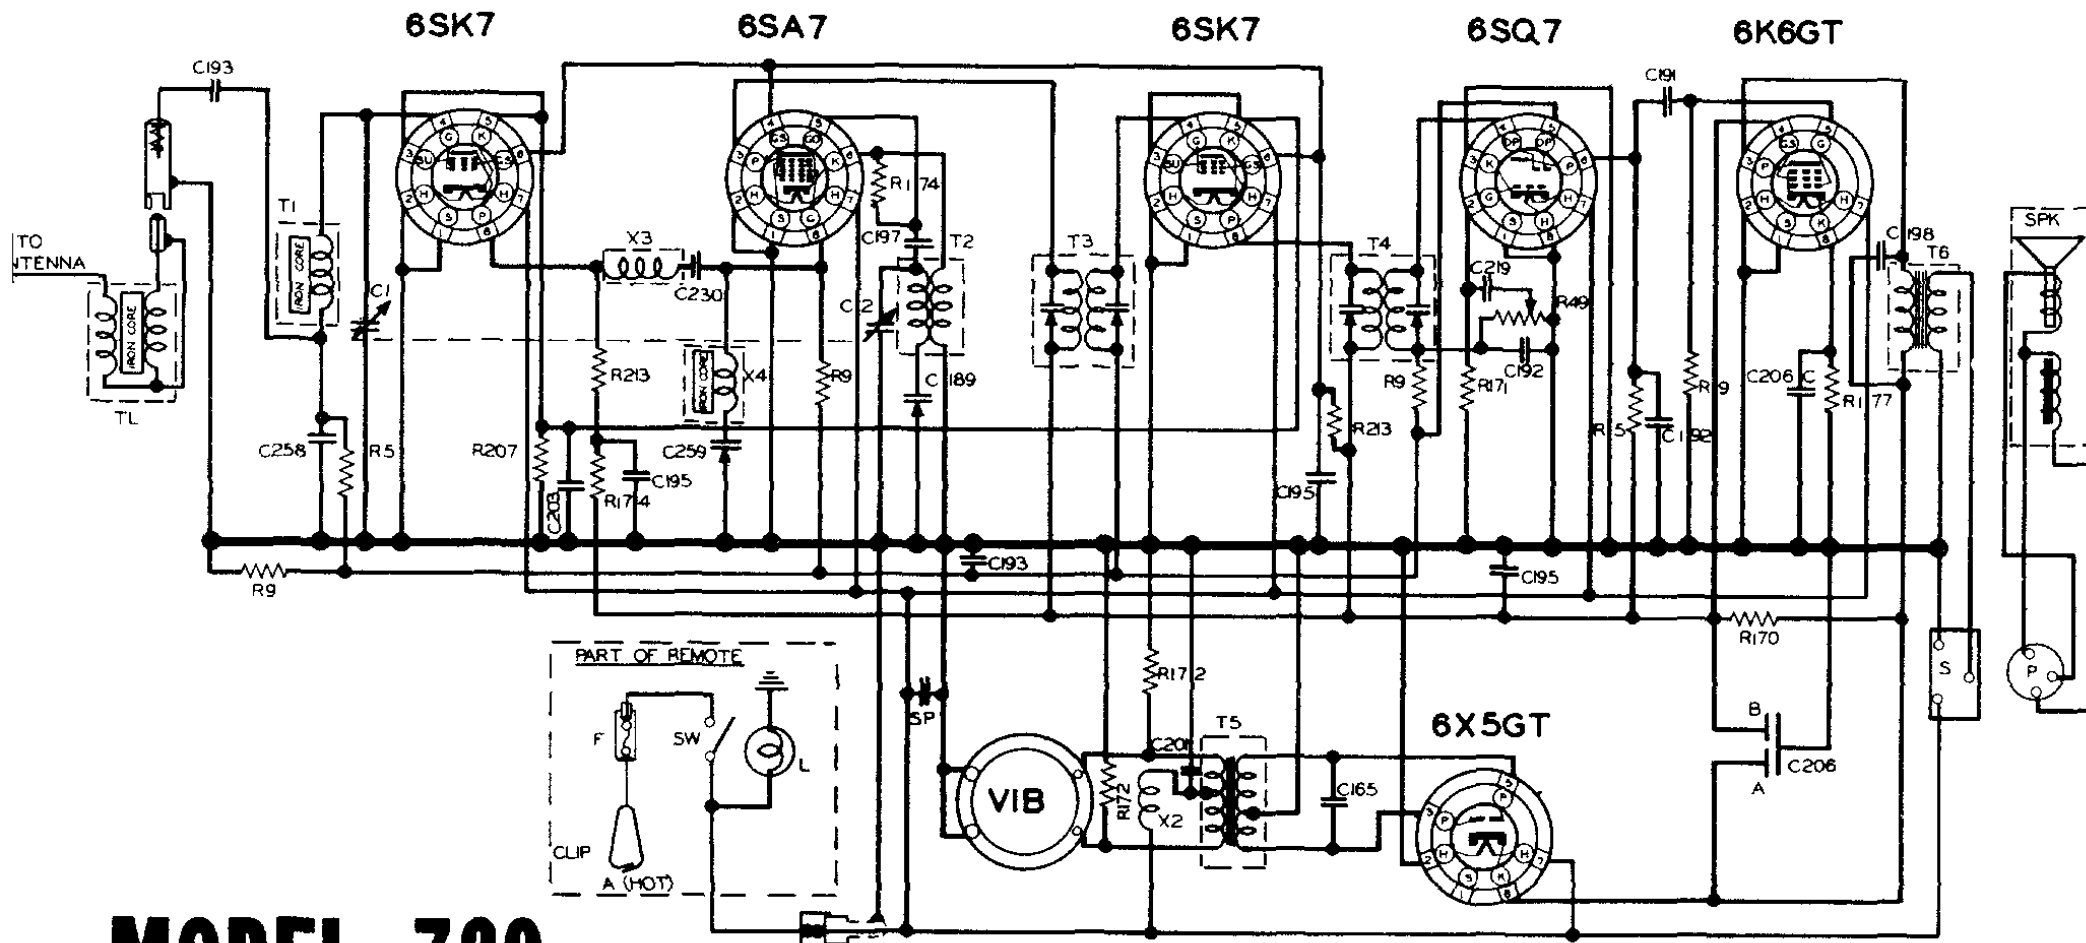

MODEL 720

RESISTORS				CONDENSERS				CHOKES & TRANSFORMERS				MISCELLANEOUS UNITS		
R	OHMS	W	PART NO	C	CAPACITY	VOLT	PART NO	T-X	TYPE	PART NO		SYMBOL	DESCRIPTION	PART NO
3	500 K	1/4	17-2070	1	TWO-GANG		17-16234	1	ANTENNA COIL	00-16219		F	FUSE - 20 AMPS.	17-2225
9	1 M	1/4	17-2080	2	VARIABLE			2	OSCILLATOR	00-17007		L	DIAL LIGHT BULB - MAZDA NO. 51	17-13904
49	500 K	1/4	17-14536	185	.005	1200	17-14230	3	FIRST IF COIL	00-17007		P	SPEAKER PLUG	17-4760
170	800		17-14287	189	400-600 MMFD	PAD	17-14266	4	SECOND IF COIL	00-17008		S	SPEAKER SOCKET	17-15831
171	15 M	1/4	17-14286	191	.01	400	17-14272	5	POWER TRANSFORMER	00-16265		SPK	SPEAKER ASSEMBLY	17-16517
172	100	1/4	17-14289	192	.00025	600	17-14273	6	OUTPUT TRANSFORMER	00-16266		SW	POWER SWITCH	
174	20 K	1/4	17-14291	193	.05	200	17-14274					TL	TRANSMISSION LINE	00-16989
177	850	1/4	17-14298	195	.05	400	17-14276					SP	SPARK PLATE	
213	10 K	1/4	17-14369	219	.003	200	17-14312					VIB	VIBRATOR	17-14747
207	500	1/4	17-14361	223	.2	200	17-16242							
				208A	10 MFD.	300								
				208B	10 MFD.	300								
				208C	20 MFD.	15								
				230	.0005	400	17-14326							
				258	.004	600	17-14361							
				201	.5	150	17-14265							
				259	4-40 MMFD	PAD	17-14363							
				197	.0001	600	17-14276							
				198	.005	400	17-14279							

I.F. PEAK 455 K.C.
 FREQUENCY RANGE 1575 TO 540 K.C.
 NOBLITT-SPARKS INDUSTRIES, INC.
 COLUMBUS, INDIANA