

ARVIN HOME RADIO CHASSIS RE 48

12A8GT

12K7GT


12Q7GT

50L6GT

RED TO
ANTENNA



CHASSIS
BASE

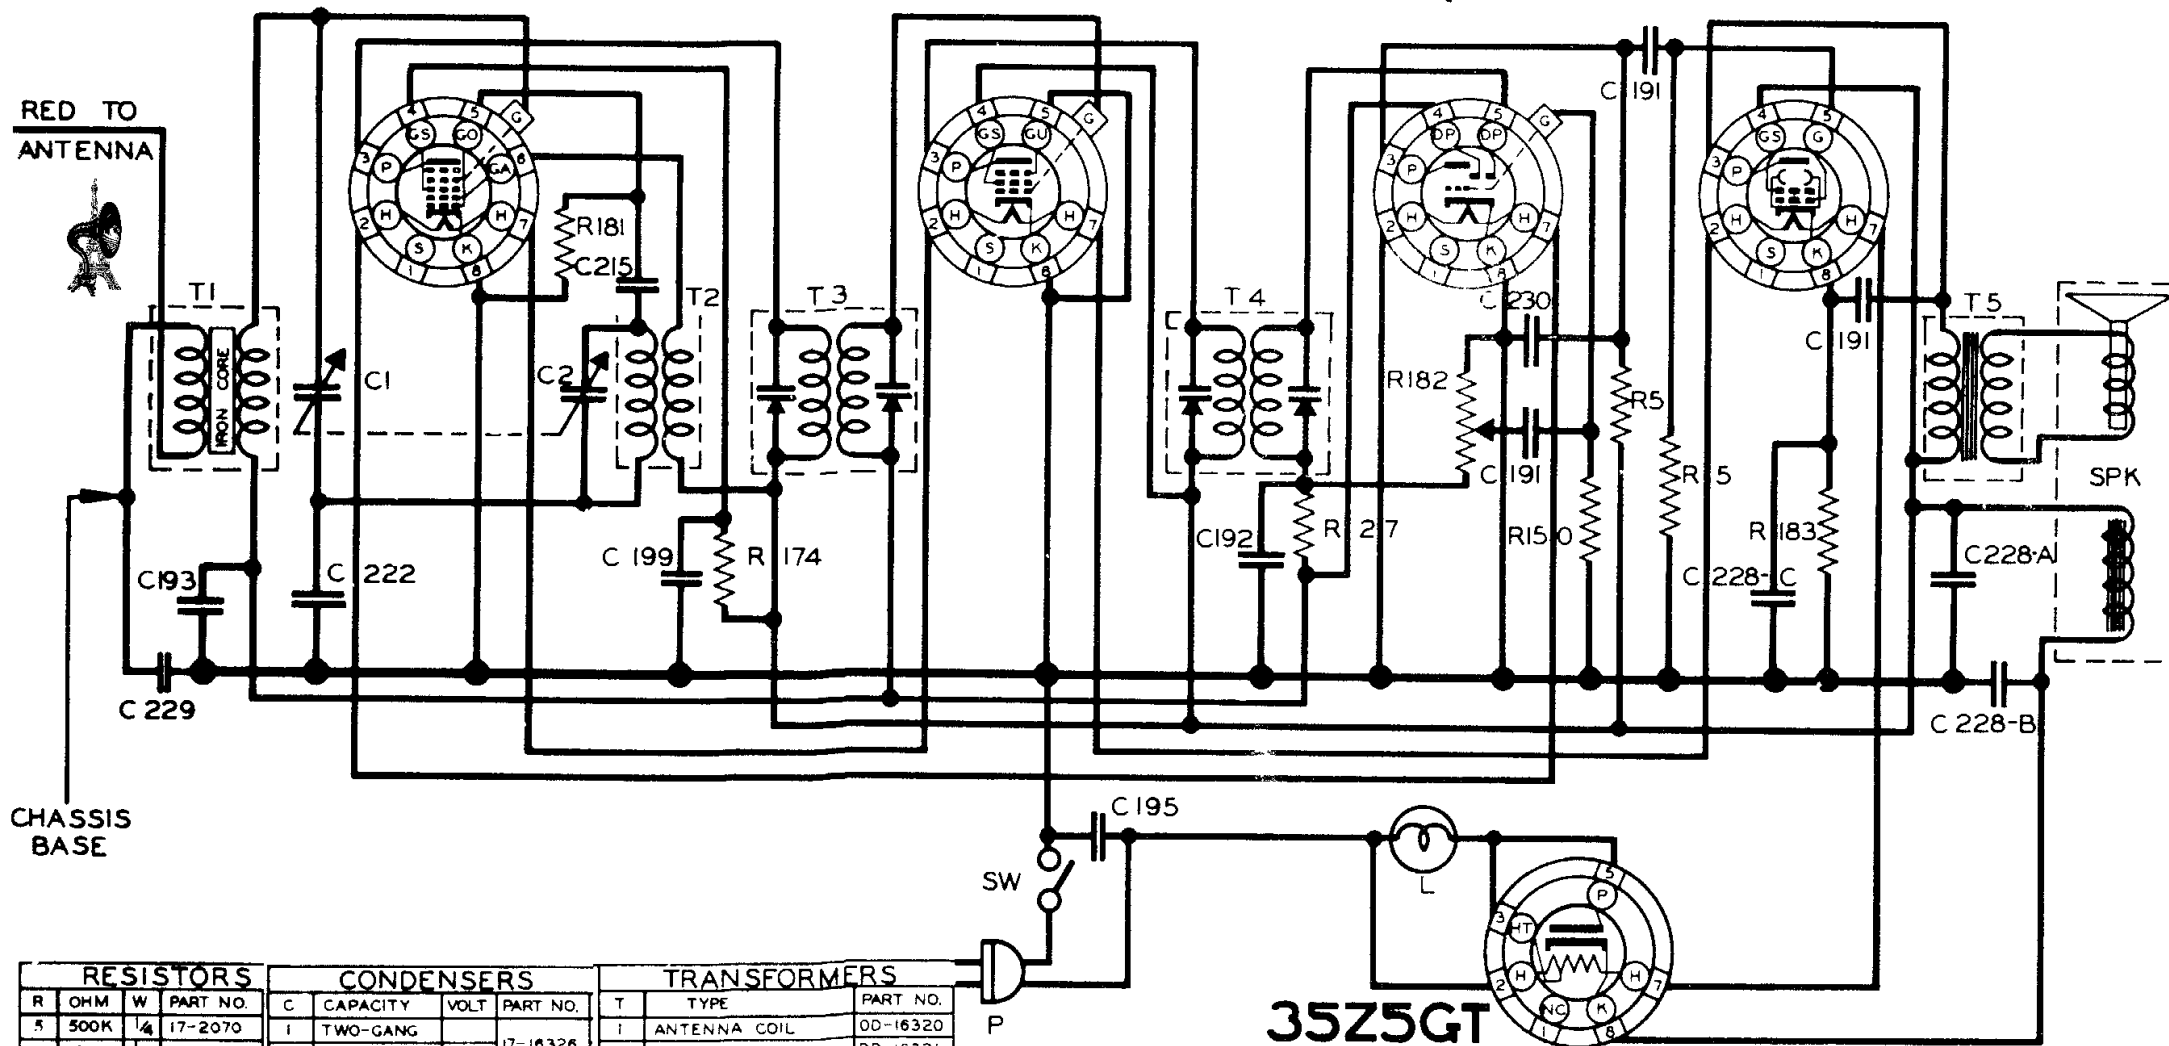

RESISTORS				CONDENSERS				TRANSFORMERS		
R	OHM	W	PART NO.	C	CAPACITY	VOLT	PART NO.	T	TYPE	PART NO.
5	500K	1/4	17-2070	1	TWO-GANG		17-16326	1	ANTENNA COIL	00-16320
27	2M	1/4	17-4788	2	VARIABLE		17-16326	2	OSCILLATOR COIL	00-16321
150	5M	1/4	17-14242	191	.01	400	17-14272	3	FIRST I.F. COIL	00-16322
174	20K	1/4	17-14291	192	.00025	600	17-14273	4	SECOND I.F. COIL	00-16323
181	100K	1/4	17-14303	193	.05	200	17-14274	5	OUTPUT TRANS.	00-16324
182	1M	V.C.	17-14315	195	.05	400	17-14276			
183	150	1/4	17-14318	199	.02	200	17-14283			
				215	.0001	600	17-14310			
				222	.2	400	17-14317			
				228A	10 MFD.	150				
				228B	20 MFD.	150	17-14326			
				228C	20 MFD.	25				
				229	.02	400	17-14327			
				230	.0005	400	17-14328			

35Z5GT

MISCELLANEOUS UNITS		
SYMBOL	DESCRIPTION	PART NO.
L	DIAL LIGHT BULB - MAZDA NO 51	17-13904
P	LINE CORD & PLUG ASSEMBLY	17-16371
SPK	SPEAKER ASSEMBLY	17-16314A
SW	LINE SWITCH	17-14315

I.F. PEAK 455 K.C.
BALANCE 1400 K.C. - CHECK AT 600 K.C.