


NOBLITT-SPARKS INDUSTRIES, INC.

MODEL 140P
Chassis RE-209

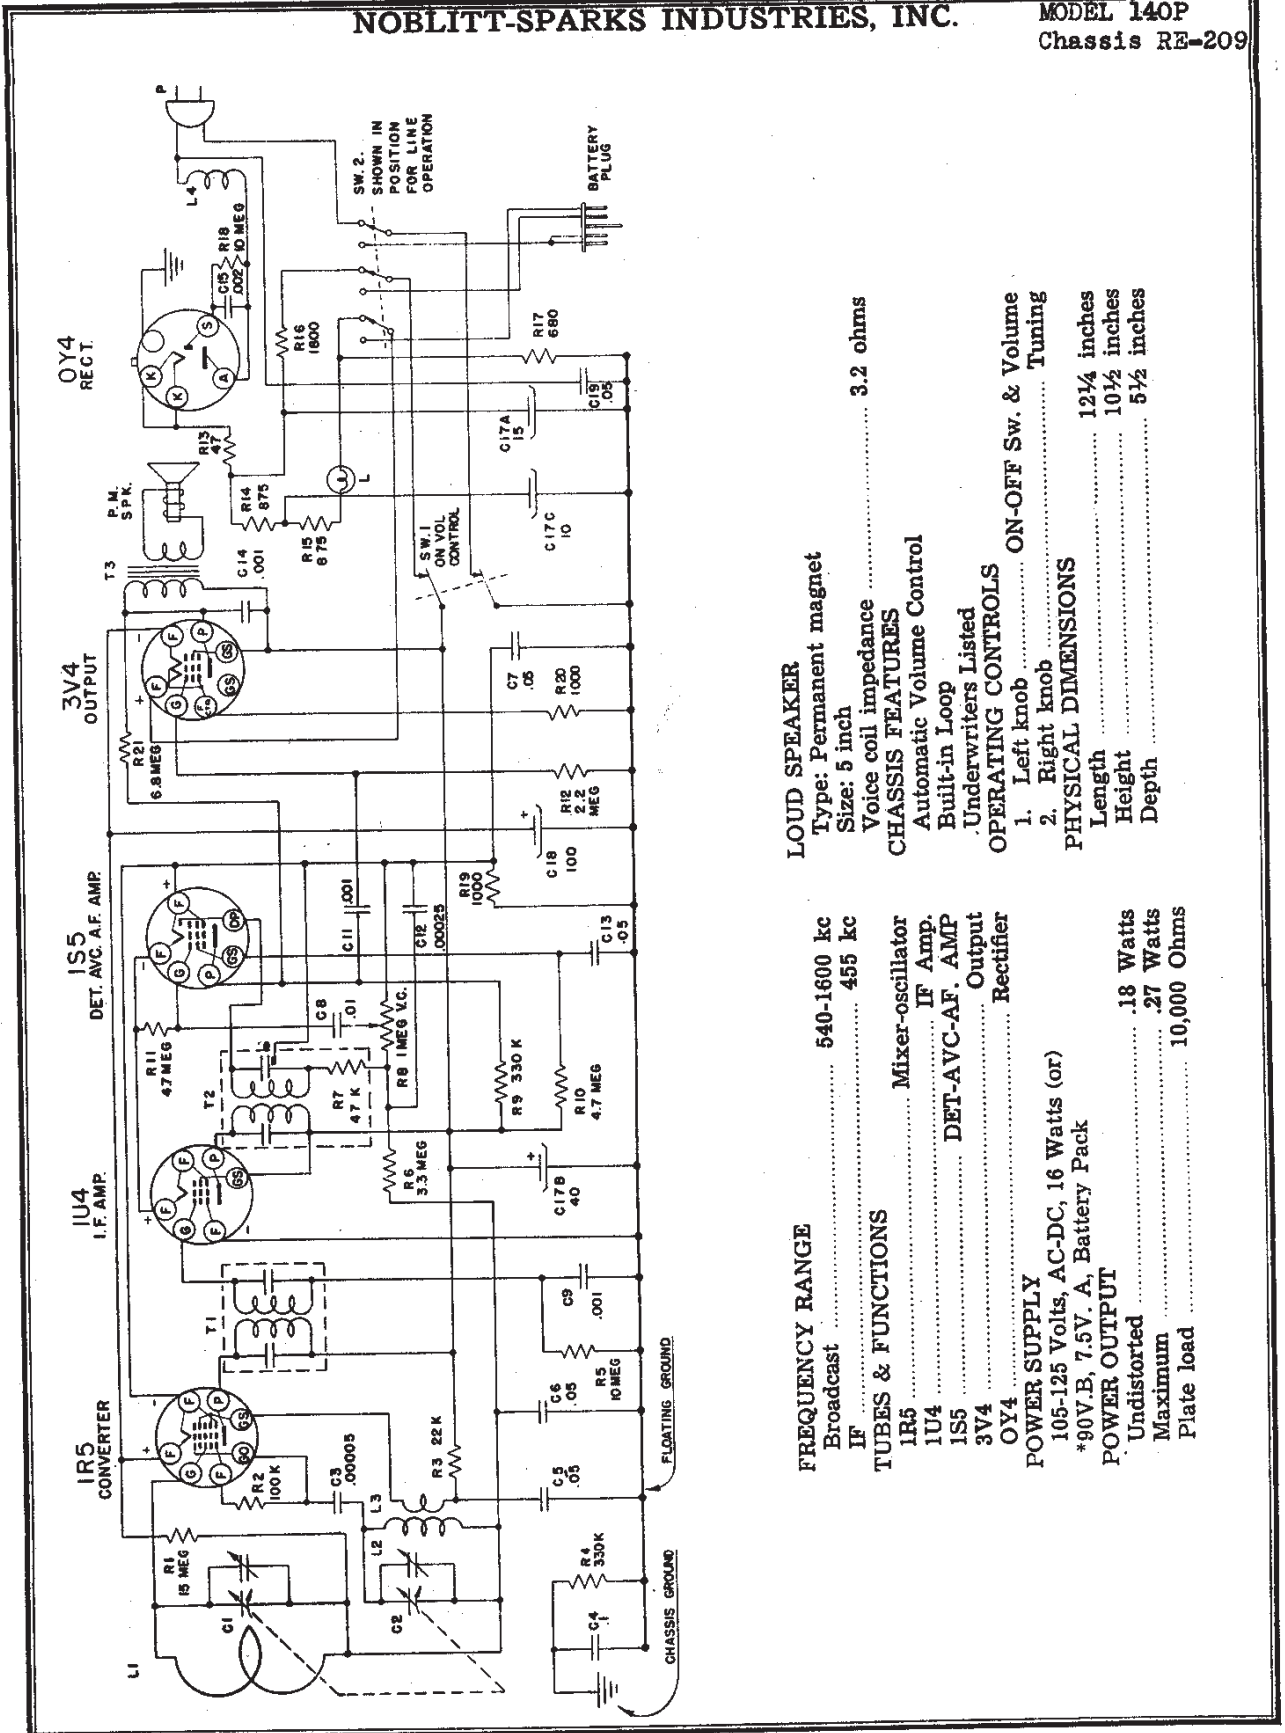

©John F. Rider

- FREQUENCY RANGE**
Broadcast 540-1600 kc
IF 455 kc
- TUBES & FUNCTIONS**
1R5 Mixer-oscillator
1U4 IF Amp.
1S5 DET-AVC-AF. AMP
3V4 Output
OY4 Rectifier
- POWER SUPPLY**
105-125 Volts, AC-DC, 16 Watts (or)
*90V.B, 7.5V. A, Battery Pack
- POWER OUTPUT**
Undistorted18 Watts
Maximum27 Watts
Plate load 10,000 Ohms
- LOUD SPEAKER**
Type: Permanent magnet 3.2 ohms
Size: 5 inch
Voice coil impedance
- CHASSIS FEATURES**
Automatic Volume Control
Built-in Loop Underwriters Listed
- OPERATING CONTROLS**
1. Left knob ON-OFF Sw. & Volume
2. Right knob Tuning
- PHYSICAL DIMENSIONS**
Length 12¼ inches
Height 10½ inches
Depth 5½ inches