


Service
Service
Service

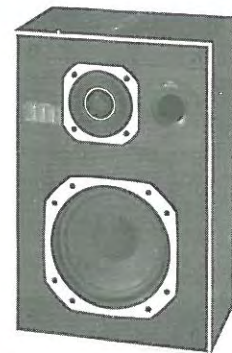

Service Manual

Volume
Volume : 13 litres

Dimensions
Dimensions : 385x255x196 mm

Weight
Poids : 4.7 kg

Rated impedance
Impédance nominale : 8 Ω


Power handling capacity
Capacité de charge : 30 W

Cross-over frequencies
Frequencies de convergence : 5000 Hz

Resonance frequency
Fréquence de résonance : 20-86 Hz

Frequency range
Réponse de fréquence : 45 Hz-20 kHz

Slope: high-pass
Pente: passe-haut : 6 dB/oct.



GB

Safety regulations require that the set be restored to its original condition and that parts which are identical with those specified, be used

F


Les normes de sécurité exigent que l'appareil soit remis à l'état d'origine et que soient utilisées les pièces de rechange identiques à celles spécifiées.

Documentation Technique Service Dokumentation Documentazione di Servizio Huolto-Ohje Manual de Servicio Manual de Servicio



Subject to modification
4822 725 12803
Printed in The Netherlands


PHILIPS

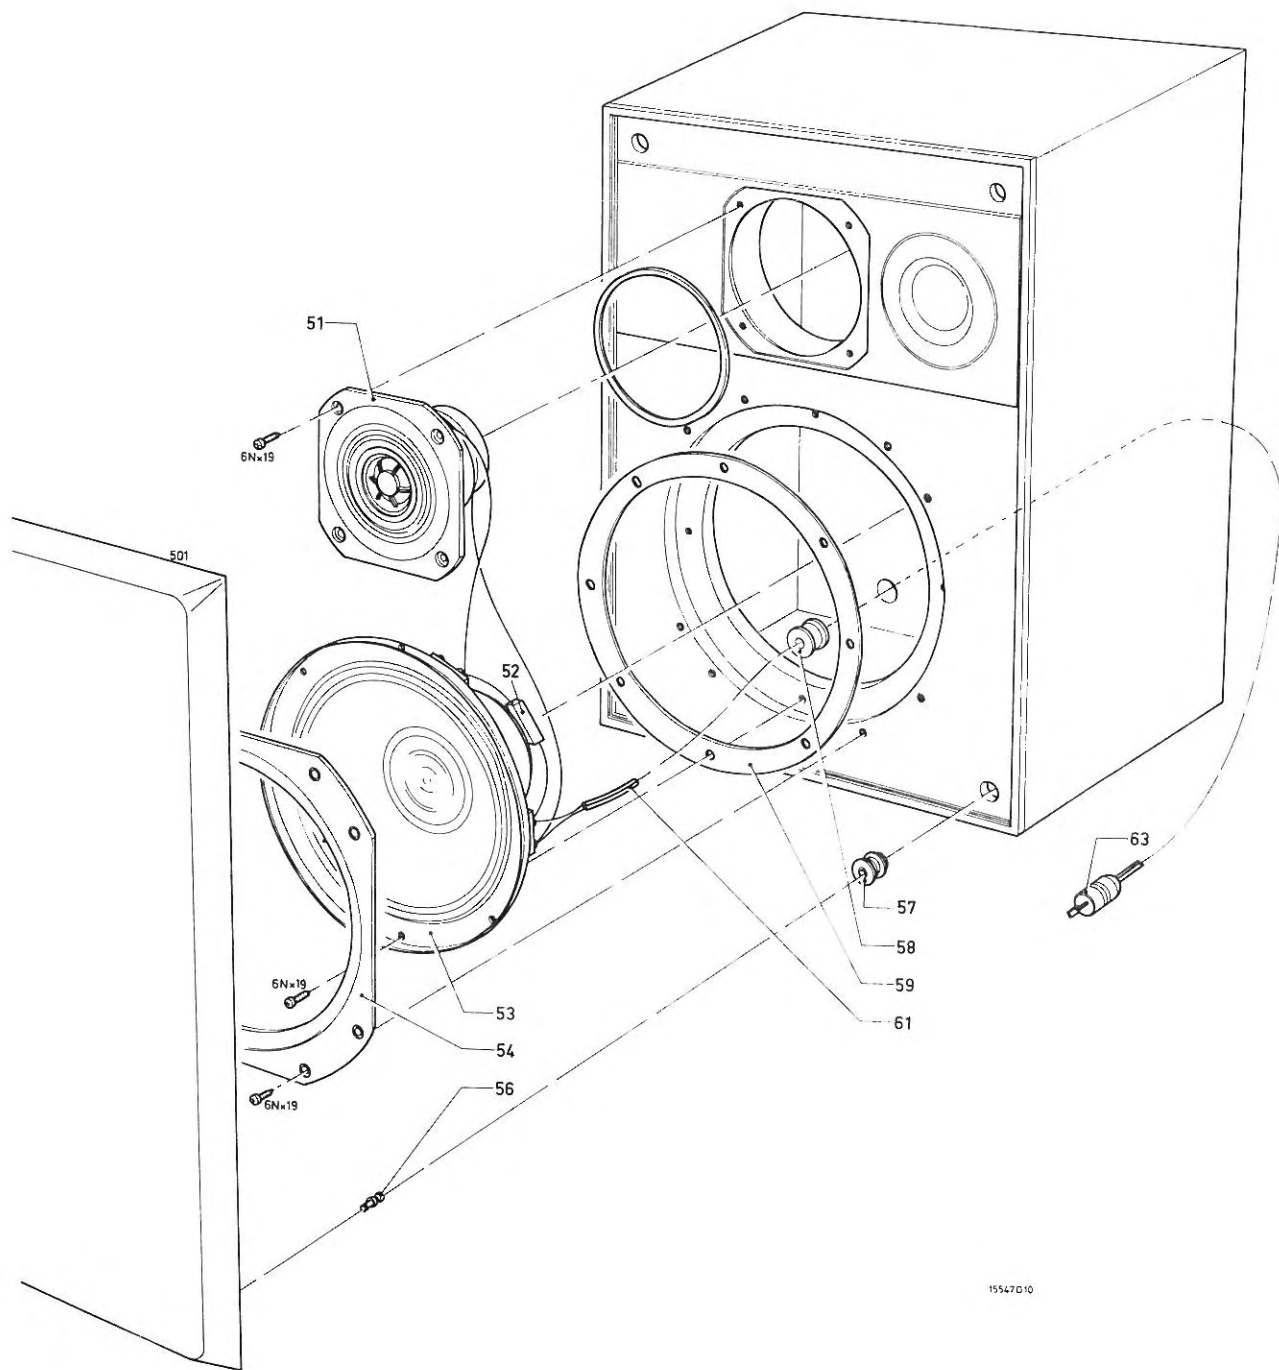

15547010


51	4822 240 70027 – AD0143T15
52	4822 121 40188
53	4822 240 50123 – AD70610W8
54	4822 466 90887
56	4822 535 91104
57	4822 462 40364
58	4822 325 60204
59	4822 532 51086
61	4822 322 20014 – 100 m
63	4822 264 30041


Service
Service
Service

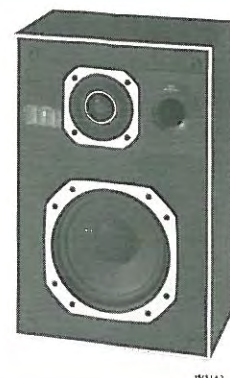

Service Manual

Volume Volume	: 13 litres	Cross-over frequencies Frequencies de convergence	: 5000 Hz
Dimensions Dimensions	: 385x255x196 mm	Resonance frequency Fréquence de résonance	: 20 - 86 Hz
Weight Poids	: 4.7 kg	Frequency range Réponse de fréquence	: 45 Hz - 20 kHz
Rated impedance Impédance nominale	: 4 Ω	Slope: High-pass Pente: Passe-haut	: 6 dB/oct.
Power handling capacity Capacité de charge	: 35 W		

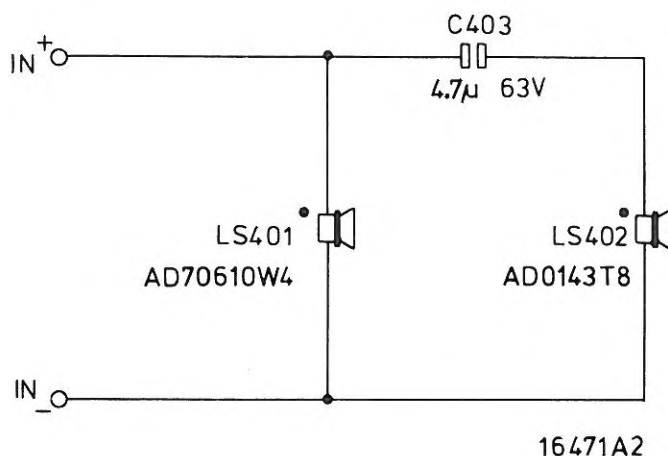

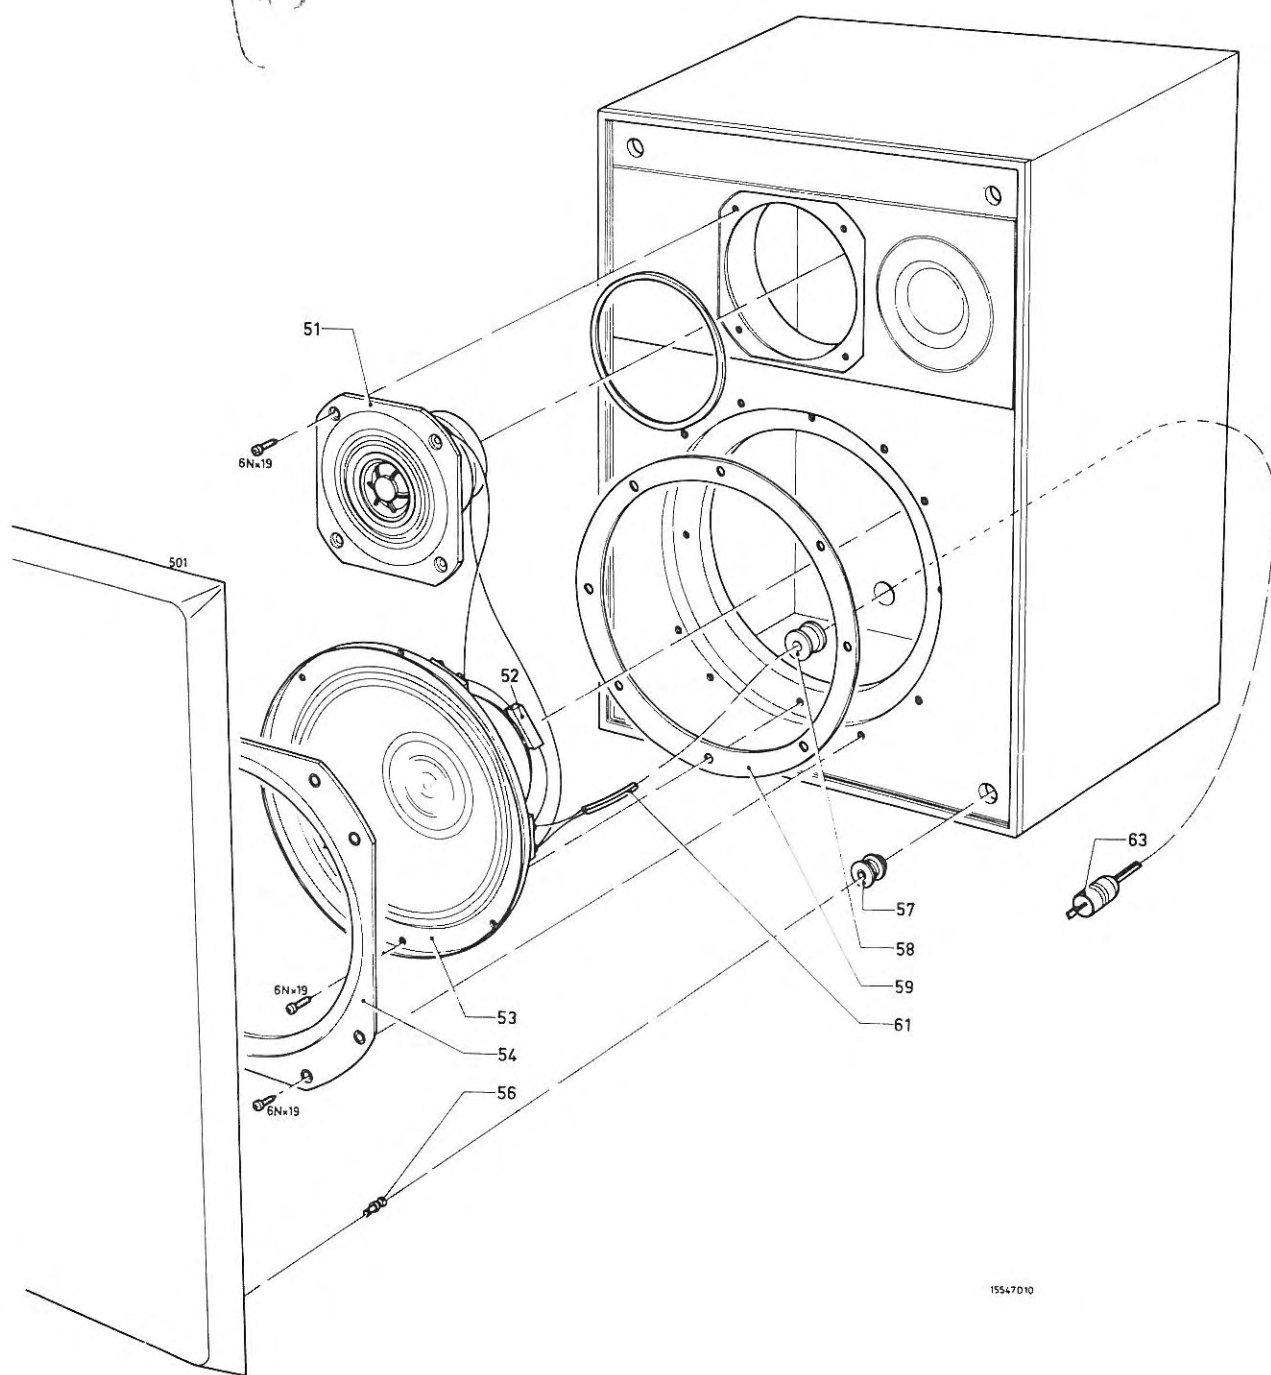

15547010

51	4822 240 70033 - AD0143T8
52	4822 124 20748
53	4822 240 50132 - AD70611W4
54	4822 466 90887
56	4822 535 91104
57	4822 462 40364
58	4822 325 60204
59	4822 532 51086
61	4822 322 20014 - 100 m
63	4822 264 30041