


I.F. 455 KC.

FLOATING GROUND  
INDICATES GROUND TO CHASSIS BASE

- R1 Volume Control  
1 megohm
- R2 15 ohms, 1/4 w.
- R3 Tone Control  
500,000 ohms  
(Early sets used  
50,000 ohms in  
plate circuit)
- R4 12,000 , 1 watt
- R5 150 ohms, 1/4 w.
- R6 470,000 , 1/4 w.
- R7 2.2 megohms, "
- R8 15 megohms, "
- R9 22,000 ohms, "
- R10 330,000 ohms "
- R11 680 ohms, 1/4 w.
- R12 1 megohm, 1/4 w.

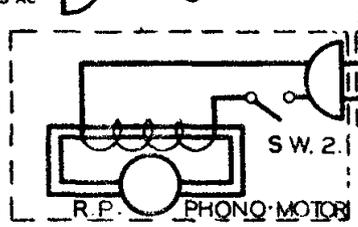

TUBE SOCKETS ARE VIEWED FROM UNDER SIDE OF CHASSIS.  
VOLTAGE READINGS SHOWN AT SOCKET PRONGS ARE TO FLOATING GROUND AND ARE TAKEN WITH NO SIGNAL.  
A.C. LINE VOLTAGE AT 117 VOLTS.  
WHERE NO READING IS GIVEN, THE VOLTAGE IS ZERO OR TOO LOW TO READ.

- C1-C2 Variable, 2 gang
- C3A 10 mfd., 150 v.
- C3B 20 mfd., 150 v.
- C3C 40 mfd., 150 v.
- C4 .02 mfd., 400 v.
- C5 500 mmfd., 500 v.
- C6 .2 mfd., 400 v.
- C7 .002 mfd., 600 v.
- C8 .05 mfd., 200 v.
- C9 50 mmfd., 500 v.
- C10 .05 mfd., 400 v.

ARVIN RADIO - MODEL 558 CHASSIS RE - 204  
5 TUBE AC-DC RADIO-PHONO COMBINATION  
MANUFACTURED BY NOBLITT - SPARKS INDUSTRIES, INC. COLUMBUS IND.