


BELMONT RADIO CORP.

MODEL 489 Series A
Serial 7J852300 up
Issue B, Ser. 8C16800 up

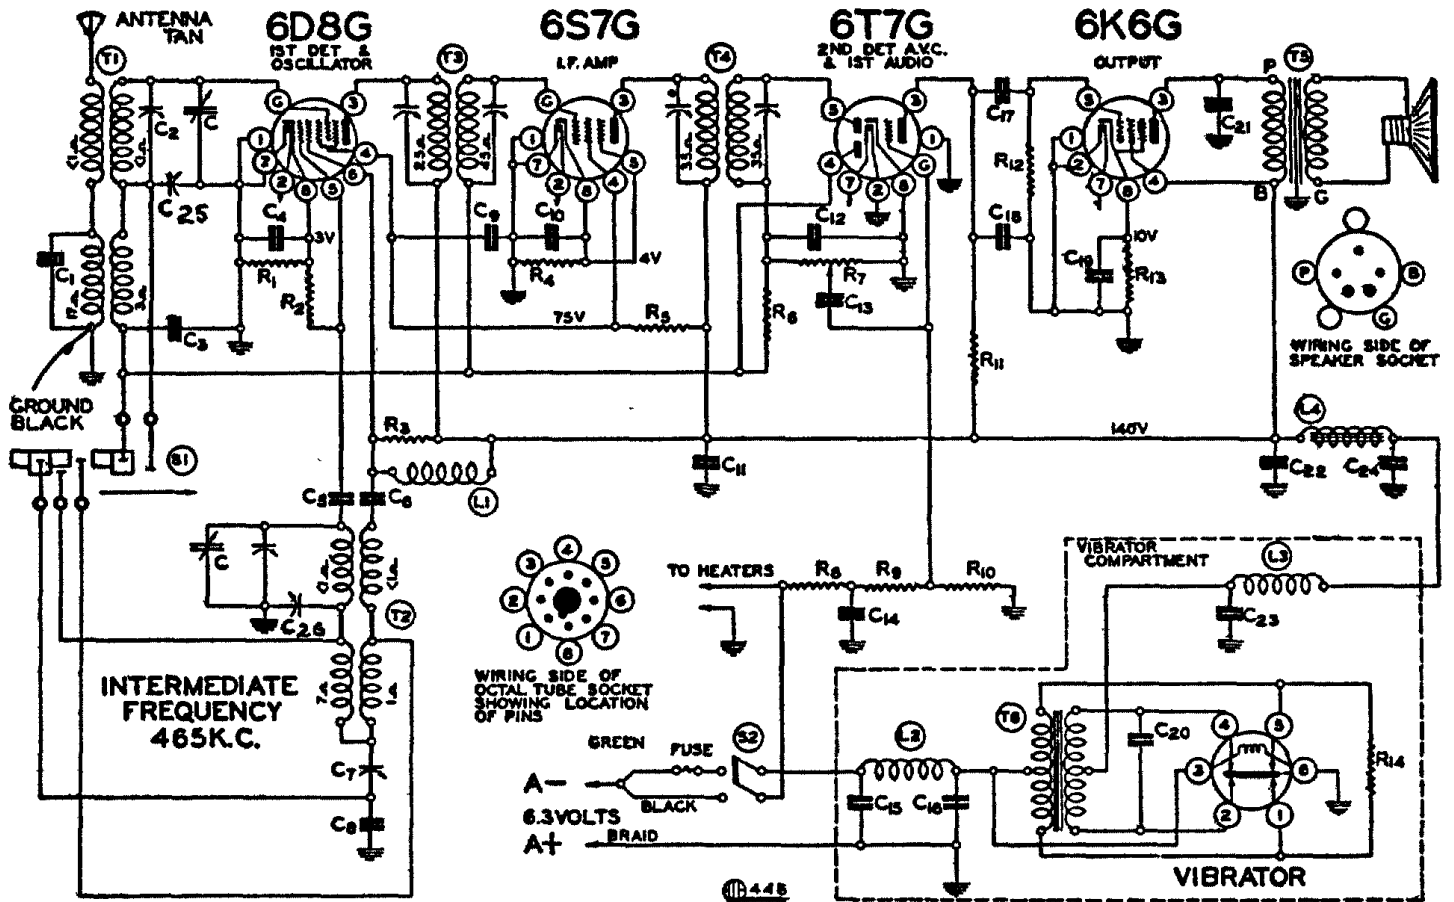

RESISTORS

R1	130-54	500 ohm - 1/3 w.
R2	130-12	50M ohm - 1/3 w.
R3	130-12	50M ohm - 1/3 w.
R4	130-26	1000 ohm - 1/3 w.
R5	130-149	15M ohm - 1/3 w.
R6	130-4	3 megohm - 1/3 w.
R7	101-91	1 meg volume control
R8	130-191	1.5 megohm - 1/3 w.
R9	130-4	3 megohm - 1/3 w.
R11	130-9	200M ohm - 1/3 w.
R12	130-3	500M ohm - 1/3 w.
R13	130-153	700 ohm - 1/3 w.
R14	130-84	200 ohm - 1/3 w.
R10	130-191	1.5 meg - 1/3 w.

CONDENSERS

C	102-43	2 gang variable
C1	129-5	.0001 Mica
C2	124-39B	Adj. Cond. 2-25 mmf.
C3	100-22	.05 x 200
C4	100-20	.1 x 200
C5	129-39	.00005 Mica
C6	100-25	.002 x 600
C7	124-38	Series pad 600 mmf. W. C.
C8	129-54	.003 Mica
C9	100-20	.1 x 200
C10	100-20	.1 x 200
C11	100-11	.01 x 400
C12	129-5	.0001 Mica
C13	100-11	.01 x 400
C14	100-11	.01 x 400
C15	100-40	.5 x 200
C16	100-40	.5 x 200
C17	100-26	.02 x 400
C18	129-2	.0005 Mica
C19	119-22	10.0 mfd. 25 v. lytic
C20	100-34	.005 x 1200
C21	100-19	.006 x 600
C22	119-28B	5.0 mfd. lytic
C23	100-20	.1 x 200
C24	119-28B	5.0 mfd. lytic

C22 - C24 in same unit

Adjustable Trimmer, 2-20 mmf.
Adjustable Trimmer, 2-20 mmf.
C25 and C26 in same unit

MODEL 489, SERIES A

(Serial No. 7J852300 and up)

ISSUE B (Serial No. 8C136800 and up)

PARTS

T1	111-83	Antenna coil complete
T2	110-66B	Oscillator coil complete
T3	108-105B	Input I.F. complete 465 kc.
T4	108-106B	Output I.F. complete 465 kc.
T5	114-96	6" speaker (P.M.)
T6	104-62E	Power Transformer
L1	123-4	R. F. "B" Choke
L2	105-19	A Choke
L3	123-3	R. F. "B" Choke
L4	105-30E	"B" Filter Choke (400 ohms)
S1	125-39	Wave Band Switch
S2		Switch on volume control

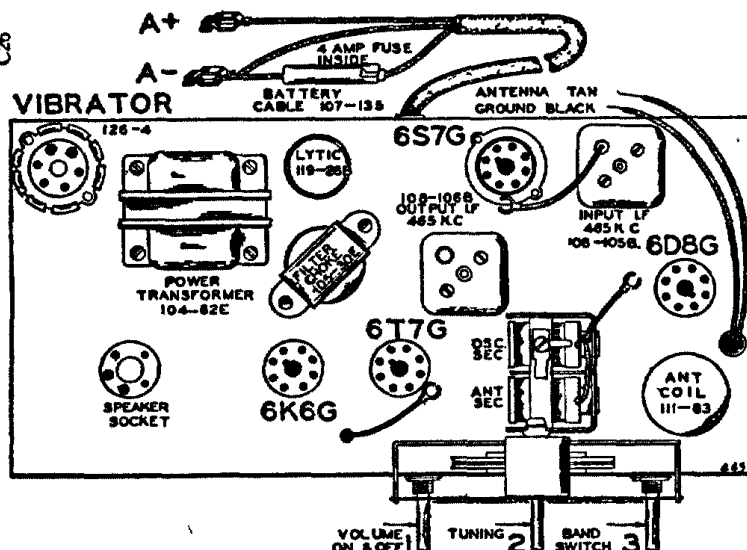


FIG. 1—TOP VIEW

FREQUENCY RANGE

535 to 1720 K.C. (Kilocycles)
5.5 to 18.1 M.C. (Megacycles)

DIAL SCALE

Upper
Lower

BAND

Broadcast
Short Wave