


ELECTRICAL VALUES

R1 - 10,000 ohms	R11 - 10,000 ohms	C9 - .006 mfd.	C19 - 8. mfd.
R2 - 200 ohms	R12 - 400 ohms	C10 - .0001 mfd.	C20 - .01 mfd.
R3 - 50,000 ohms	C1 - Trimmer	C11 - .05 mfd.	C21 - 4 mfd.
R4 - 2 megohms	C2 - Tuning	C12 - .05 mfd.	L1 - Ant. Coil
R5 - 1 megohm	C3 - Tuning	C13 - .25 mfd.	L2 - Primary
R6 - 500,000 ohms	C4 - Tuning	C14 - .01 mfd.	L3 - Secondary
R7 - 100,000 ohms	C5 - Alignment	C15 - 1. mfd.	L4 - Primary
R8 - Center Tap	C6 - Alignment	C16 - .25 mfd.	L5 - Secondary
R9 - 20,000 ohms	C7 - Coupling	C17 - .05 mfd.	L6 - Voice Coil
R10 - 15,000 ohms	C8 - Coupling	C18 - .01 mfd.	L7 - Field Coil

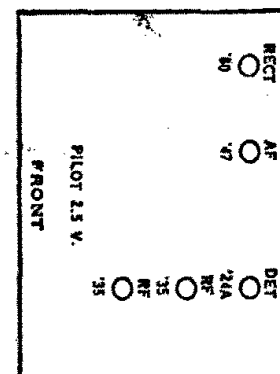

Note: Electrolytic filter condensers C19 and C21 are a single assembly. Condensers C11 to C18 inclusive are also a single assembly contained in the square can underneath the base plate.

UNITED AMERICAN BOSCH CORP.

MODEL 205,206,5-A
205-A

Model 205,206, (1932)