

Crosley

Model 52-PA — Chassis No. 67

The chassis as employed in this model portable receiver is a five tube (including rectifier), single band super-heterodyne, designed to operate from an "A and B" Battery Pack, or 110 volts A.C. (50-60 cycle) or 110 volt D.C. electric circuits.

TUNING RANGE — 550-1600 Kilocycles — 546-187.5 Meters

TUBES USED — one 1A7GT, one—1N5GT, one—IH5GT, one—1T5GT and one—117Z6GT

BATTERIES REQUIRED — one No. CR67 Crosley "A and B" Battery Pack (6 Volt "A"—75 Volt "B") or equivalent.

Measured from "B" minus using 1000 Ω /V

Voltmeter, 100 V. Range, no signal input

Tube		@ 117.5-Volt Line				Battery Pack			
Type	Function	Filament Volt	Plate Volt	Screen Volt	Cathode Volt	Filament Volt	Plate Volt	Screen Volt	Cathode Volt
1A7GT	Osc. Modulator	1.3	80	34	1.7	75	30
1N5GT	I. F. Amplifier	3.8	80	80	4.4	75	75
1H5GT	Det.-A. S. C. 1st A. F.	2.6	7	3.0	6
1T5GT	Out Put	5.1	72	80	6.0	68	75
117Z6GT	Rectifier	117.5 A. C.	117.5 A. C.	100

ALIGNMENT PROCEDURE Volume Control on full Output meter connected to Plate and Screen of 1T5GT


SIGNAL GENERATOR					
FREQUENCY SETTING	CONNECTION TO RADIO	DUMMY ANTENNA	TUNING COND. SETTING	TRIMMERS TO ADJUST (See Fig. 1)	REMARKS
455 Kc	Ant. Lead	.0001 MF	Fully open	2nd 1-F(1) front chassis flange	Adjust for maximum signal.
455 Kc	Ant. Lead	.0001 MF	Fully open	1st 1-F (2)	Adjust for maximum signal. Located top of 1st 1-F ass'y.
1650	Ant. Lead	.0001 MF	Fully open	"OSC" Shunt on gang	Adjust for maximum output. Gang does not have to tune through signal.
1400	Ant. Lead	.0001 MF	140 on dial	"ANT" shunt on gang	Adjust for maximum output.
600	Ant. Lead	.0001 MF	60 on dial	Iron core in "OSC" coil	Adjust for maximum signal while rocking gang.

Repeat above procedures for more accurate adjustments.
Maximum power output @ 75 V. "B" — approx. 200 M. W. undistorted



A Battery drain @ 6 volts, .05 Amp.; "B" Battery drain @ 75 V., 9 M. A.
Power consumption @ 117.5 volts line — 20 Watts

The Crosley Corp.

TUBE LAYOUT



TRIMMER LOCATIONS

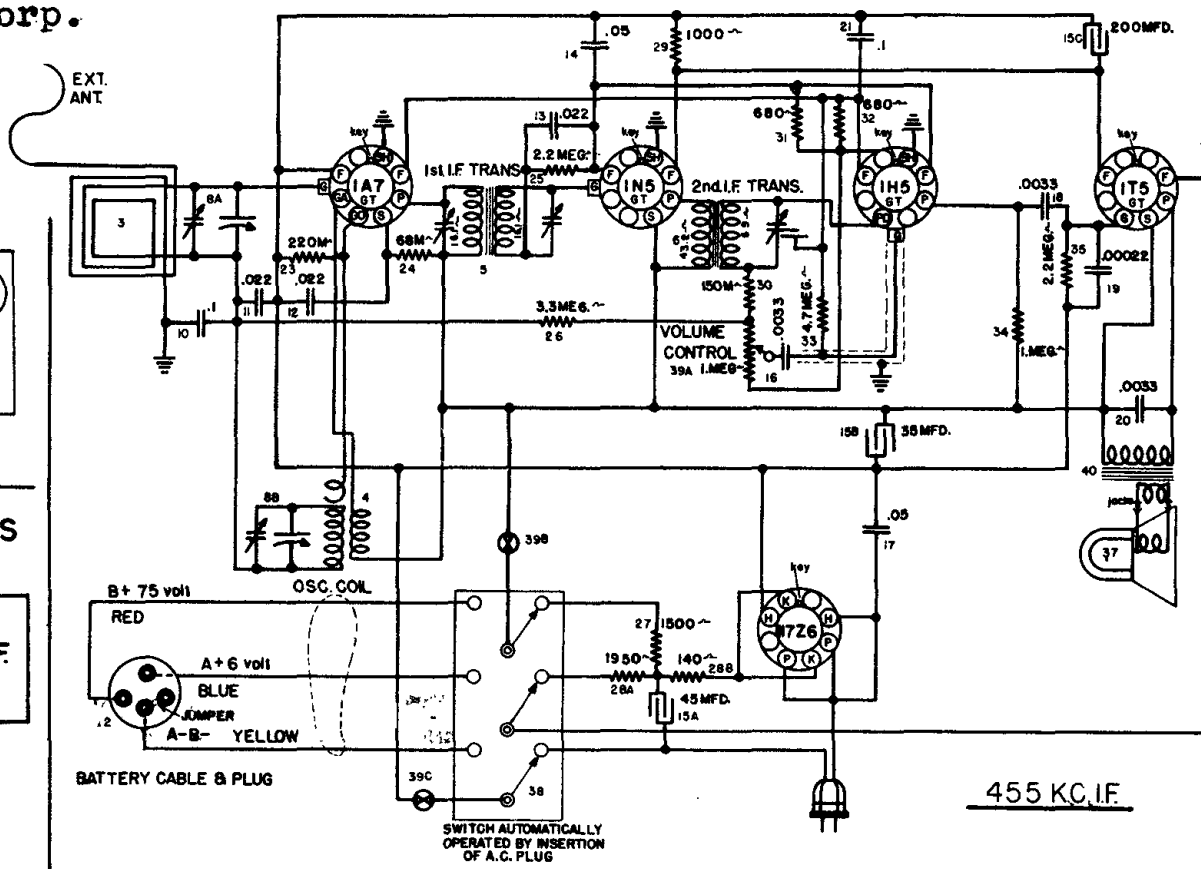

455 KC. I.F.