


CROSLLEY

MODELS: E30BF, E30GN, E30MN, E30TN
(Chassis 30E, 30E-1)

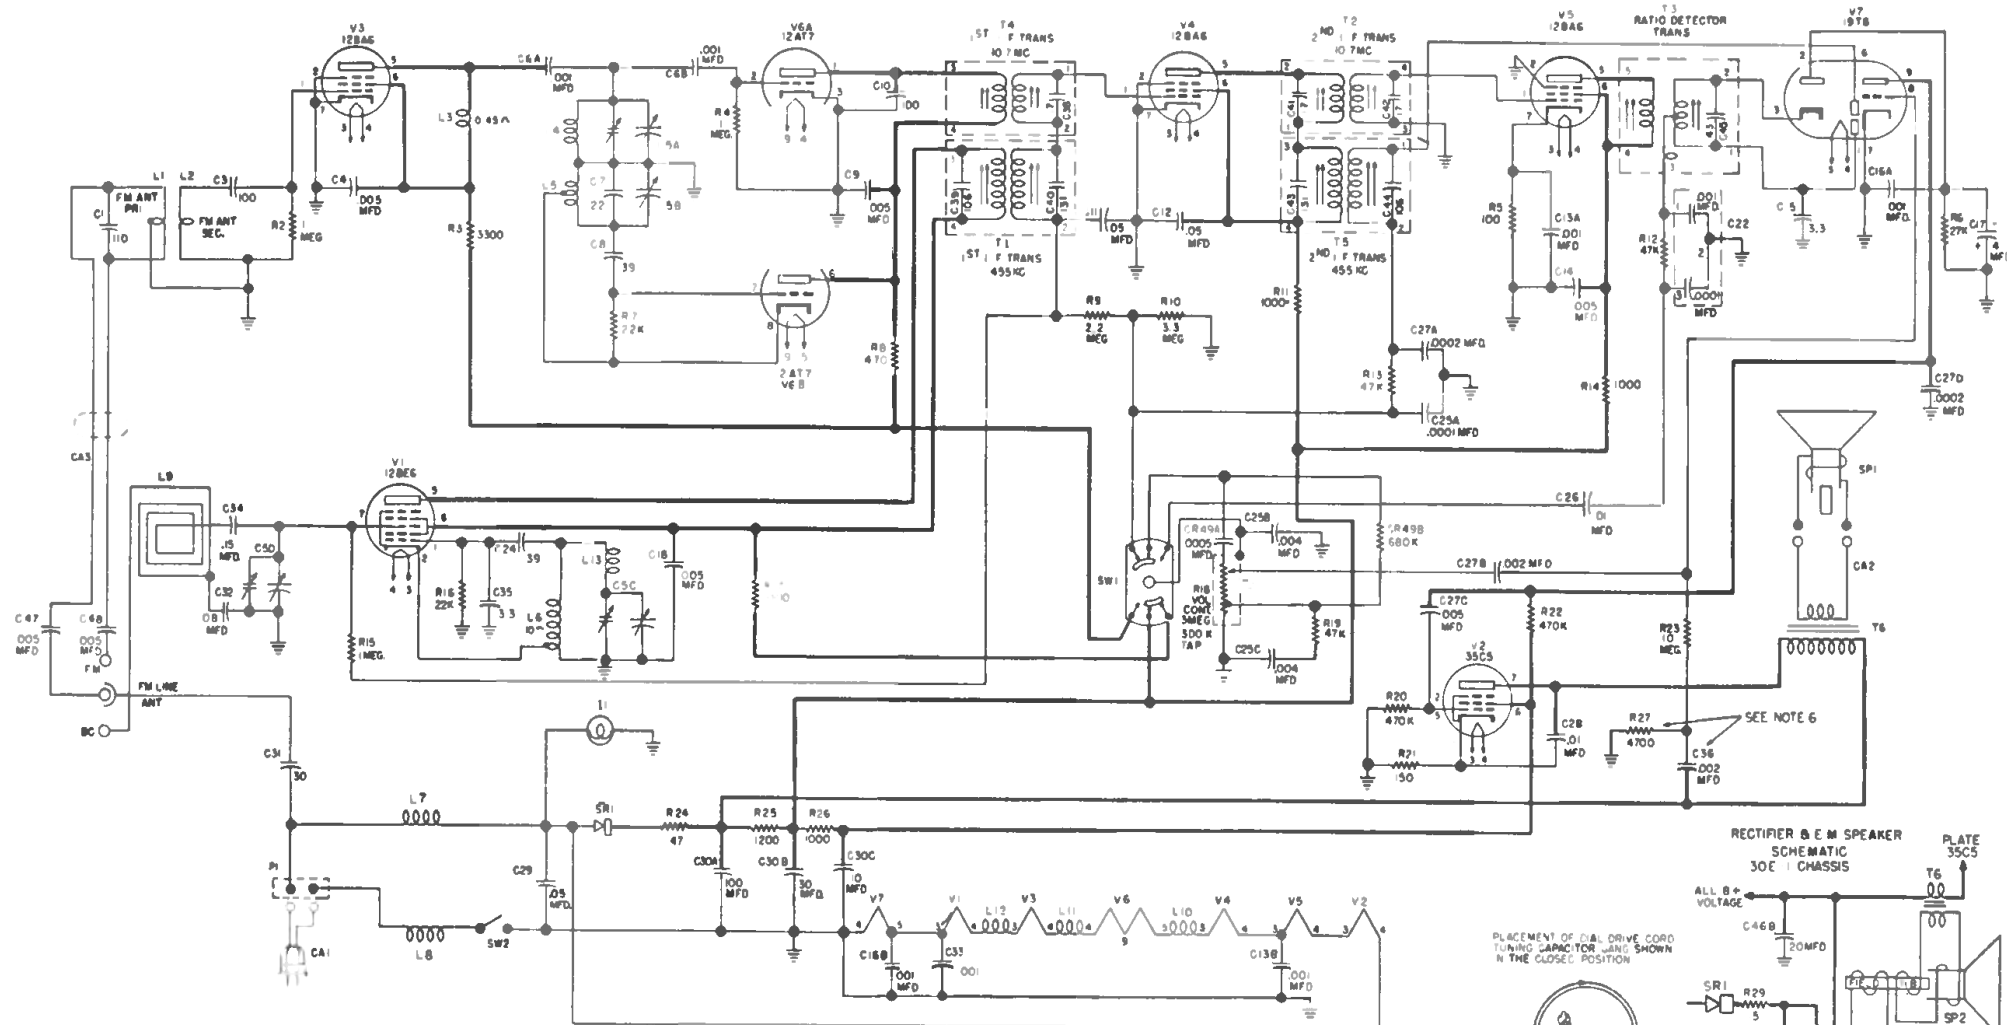

FREQUENCY RANGE: Standard Broadcast Band (AM); 540 to 1620 kc.

Frequency Modulation Band (FM); 88 to 108 megacycles.

INTERMEDIATE FREQUENCY: Standard Broadcast Band; 455 kc.



Frequency Modulation Band; 10.7 mc.

FM ANTENNA INPUT IMPEDANCE: 75 ohms balanced.

POWER SUPPLY: a.c.—d.c.

VOLTAGE RATING: 105-125 volts.

POWER CONSUMPTION: 40 watts at normal power supply voltage (117 volts).

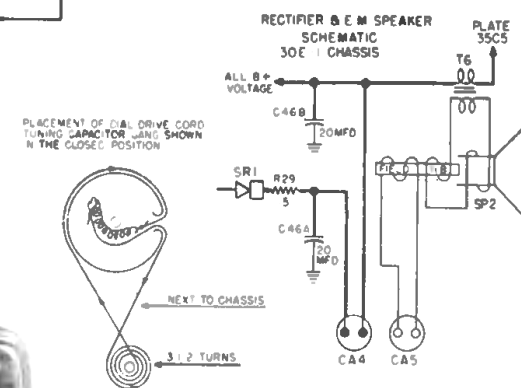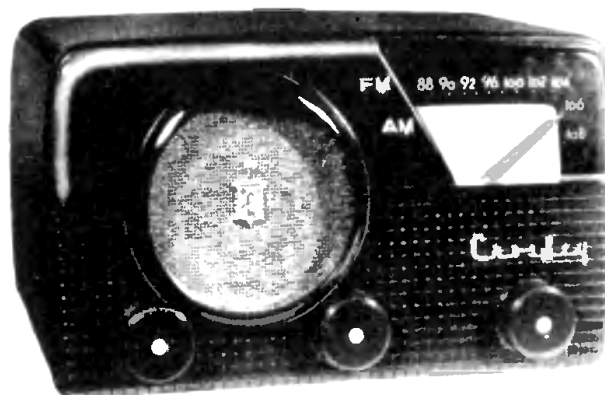

NOTES

- 1 R=1000
- 2 1 F=455 KC AM
1 F=10.7 MC FM
- 3 ALL CAPACITANCE VALUES IN MMF
AND ALL RESISTANCE VALUES IN OHMS
UNLESS OTHERWISE SPECIFIED
- 4 BAND CHANGE SWITCH SHOWN IN AM
POSITION COUNTER CLOCKWISE POSITION
- 5 NUMBER 1 TERMINAL ON 1 F TRANSFORMERS
CODED BY GREEN DOT NUMBERS PROGRESS CLOCKWISE
THESE NUMBERS MAY NOT AGREE WITH TRANSFORMERS
BASE CODING EXCEPT GREEN DOT 5 NUMBER 1
- 6 R27 AND C36 ARE USED WITH PM SPEAKERS ONLY