

DESCRIPTION

TYPE: Eight-tube, single band, Superheterodyne

FREQUENCY RANGE: 540 to 1600 kc

INTERMEDIATE FREQUENCY: 455 kc

POWER SUPPLY: 60 cycle, a c only

VOLTAGE RATING: 105-125 volts

POWER CONSUMPTION:


- Radio Position 65 watts
- Phono Position 85 watts
- Phono Motor only 20 watts

TUBE COMPLEMENT:

| Symbol No. | Type | Function |
|------------|--------|----------------------------------|
| V1 | 6BA6 | R.F. Amplifier |
| V2 | 6BE6 | Converter |
| V3 | 6BA6 | I.F. Amplifier |
| V4 | 6SQ7GT | Diode Det., AVC, Audio Amplifier |
| V5 | 6K6GT | Audio Output |
| V6 | 6SQ7GT | Phase Inverter |
| V7 | 6K6GT | Audio Output |
| V8 | 5Y3GT | Rectifier |

DIAL BULB: Type 47, 6.3V., .15 amp.

CROSLEY
MODELS 11-207MU,
11-208BU, Ch. 333

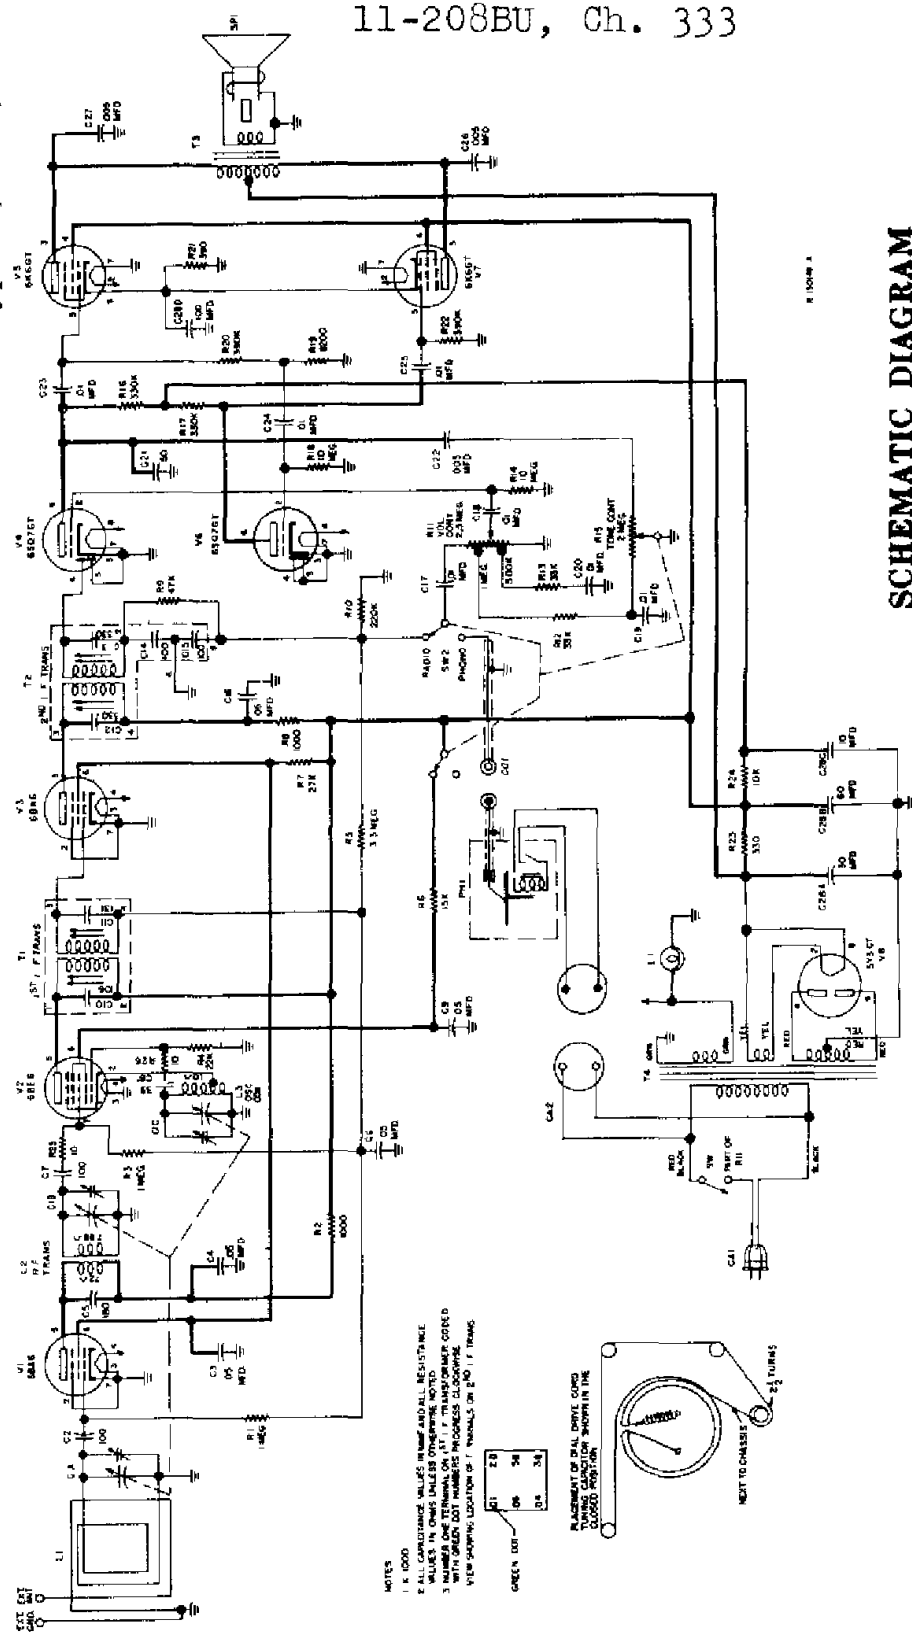

SCHEMATIC DIAGRAM