

MODEL A 200
CHASSIS NO. 103




MODEL A 302
CHASSIS NO. 103



Hoffman
RADIO CORP.

LOS ANGELES, CALIFORNIA

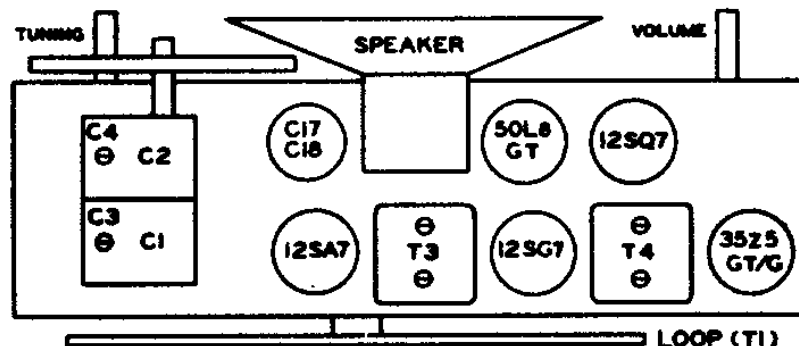

SYMBOL	DESCRIPTION	HOFFMAN NO.
C1-C2	Two-Section Variable (388-180 Mmf.)	4401
C3, C4	Trimmers; Part of Variable Cond.	
C6	100 Mmf. $\pm 20\%$, Mica	4000
C7, C10, C13	.005 Mfd., 600 Volt, Tubular Paper	4102
C8, C11, C15	.05 Mfd., 200 Volt, Tubular Paper	4100
C9, C12	270 Mmf. $\pm 20\%$, Mica	4001
C14	.02 Mfd., 400 Volt, Tubular Paper	4106
C16	.01 Mfd., 600 Volt, Tubular Paper	4103
C17-C18	Dry Electrolytic (30-50 Mfd./150V)	4201
C19, C20	.1 Mfd., 200 Volt, Tubular Paper	4111
L5	5" PM Loudspeaker	9003
R1	22,000 Ohm $\pm 20\%$, $\frac{1}{2}$ Watt	4501
R2	68 Ohm $\pm 20\%$, $\frac{1}{2}$ Watt	4524
R4	2.2 Megohm $\pm 20\%$, $\frac{1}{2}$ Watt	4502
R5	47,000 Ohm $\pm 20\%$, $\frac{1}{2}$ Watt	4504
R6	10 Megohm $\pm 20\%$, $\frac{1}{2}$ Watt	4505
R7	.5 Megohm Pot. with Switch (Volume)	4802
R8	.1 Megohm $\pm 20\%$, $\frac{1}{2}$ Watt	4511
R9	.22 Megohm $\pm 20\%$, $\frac{1}{2}$ Watt	4500
R10, R14	.47 Megohm $\pm 20\%$, $\frac{1}{2}$ Watt	4506
R11	150 Ohm $\pm 20\%$, $\frac{1}{2}$ Watt	4510
R12	47 Ohm, $\pm 20\%$, $\frac{1}{2}$ Watt	4508
R13	500 Ohm $\pm 10\%$, 5 Watt, W.W.	4700
S1	On-Off Switch (On Volume Control)	
T1	Antenna Loop	5207
T2	Oscillator Coil	5208
T3	Input I.F. Transformer (455 K.C.)	5205
T4	Output I.F. Transformer (455 K.C.)	5206
T5	Audio Output Transformer	5101