



SCHEMATIC DIAGRAM MODEL-2D60

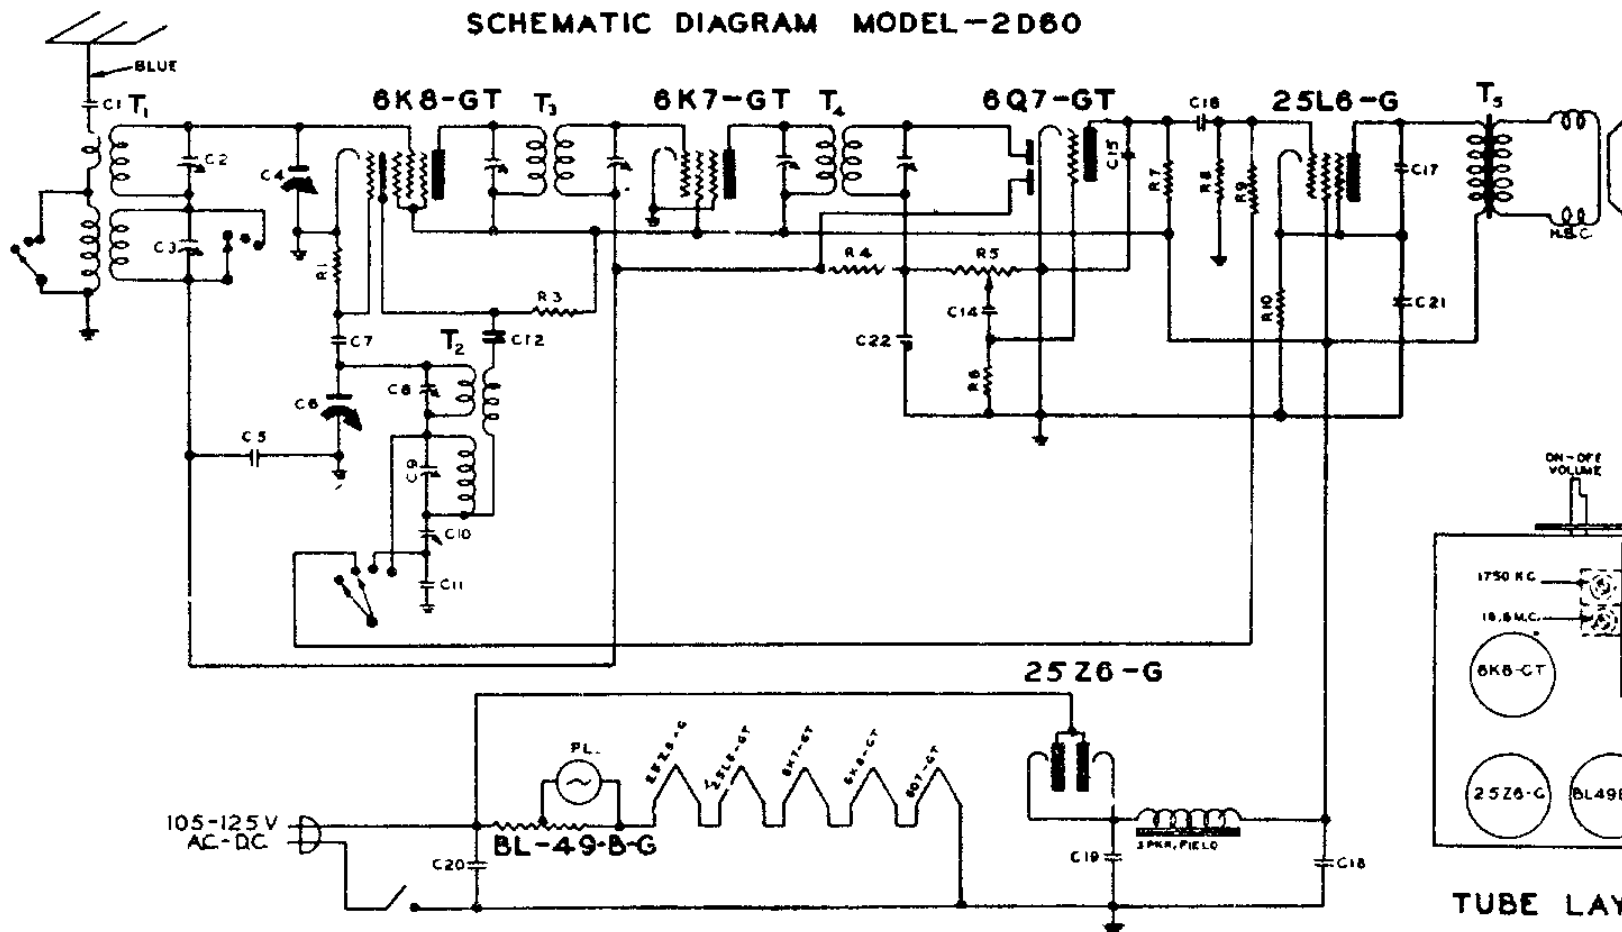

Majestic Radio

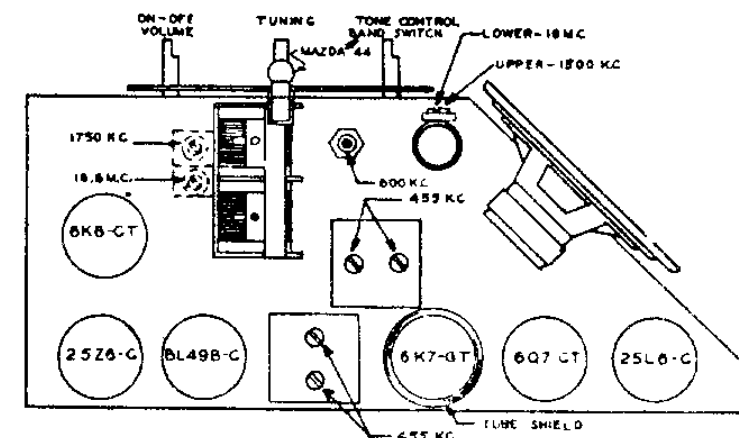

TUBE LAYOUT MODEL- 2D60

Schematic Location

Part No.

Description

C1,C12,C16,	C-15754	Tubular cond. .01 mfd. 400V
C17	C-15752	Tubular cond. .05 mfd. 200V
C4,C6	Y-CV-16A	Variable Condenser
C5	CM-31	Mica cond. 100 mmfd. 30%
C7	Y-CP-8	Padder Condenser
C10	CM-2	Mica cond. 4330 mmfd. 5%
C11	C-31	Tubular cond. .004 mfd. 400V
C14	CM-30	Mica cond. 250 mmfd. 30%
C15,C22	CE-46	Electrolytic Condenser
C18,C19,C21	C-15756	Tubular cond. .05 mfd. 400V
C20	LB-44	Mazda Bulb #44
P.L.		

Schematic Location

Part No.

Description

T1	Y-ANA-10	Antenna Assembly
T2	Y-OSA-10	Oscillator Assembly
T3	Y-IFA-10	1st I. F. Transformer
T4	Y-IFA-11	2nd I. F. Transformer
R1	R-15511	Carbon res. 50K ohm 1/4 W 20%
R3	R-15531	Carbon res. 10K ohm 1/4 W 20%
R4	R-15500	Carbon resistor 2meg 1/4 W 20%
R5	Y-VC-21	Volume Control and Switch
R6,R8	R-50	Carbon resistor 5meg 1/4 W 20%
R7	R-15504	Carbon res. 150K ohm 1/4 W 20%
R9	R-15500	Carbon res. 20K ohm 1/4 W 20%
R10	R-80	Carbon res. 110 ohm 1/2 W 20%