


SCHEMATIC DIAGRAM OF MAJESTIC SCREEN GRID A.C.-D.C. SUPERHETERODYNE RECEIVER MODEL - 400

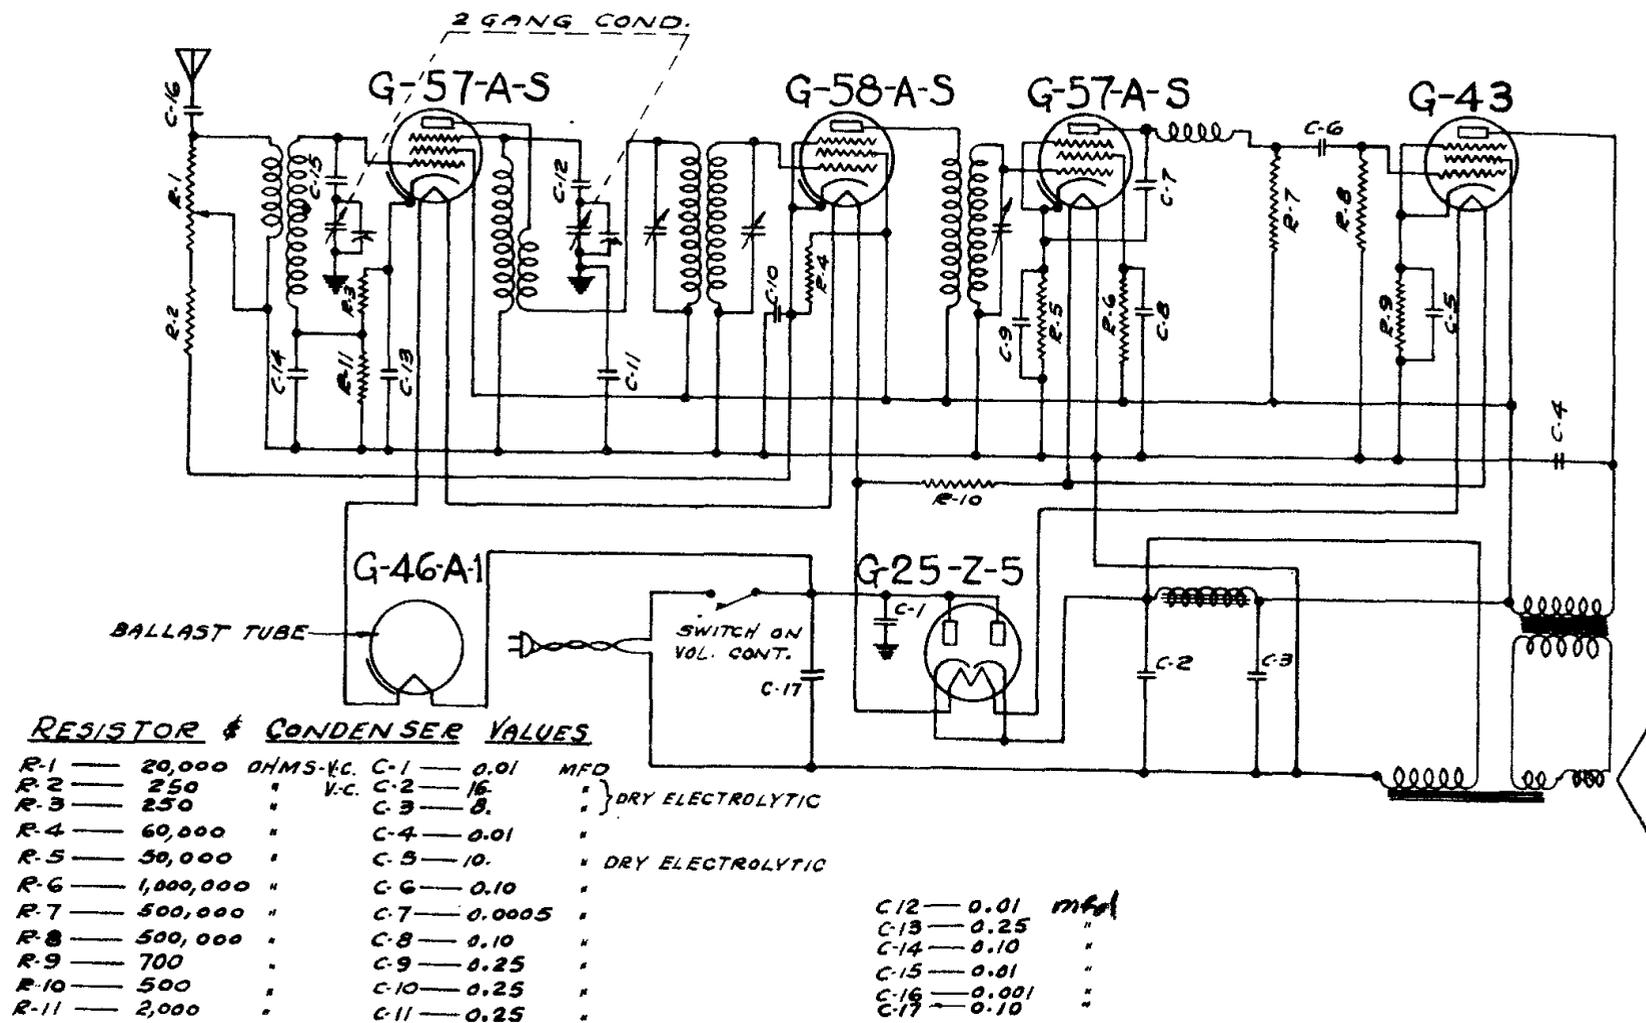

MODEL 400 CHASSIS

MODEL G-26-C SPEAKER

and

1 - With the volume control in maximum volume position and the gang condenser completely out of mesh, supply a 456 K.C. signal to the grid of the modulator tube and adjust the 4 I.F. tuning condensers for maximum sensitivity.

ALIGNMENT PROCEDURE

2 - With the gang condenser and volume control in the same position, supply a 1730 K.C. signal to the input of the receiver and align the 2 R.F. trimmer condensers for maximum sensitivity.