

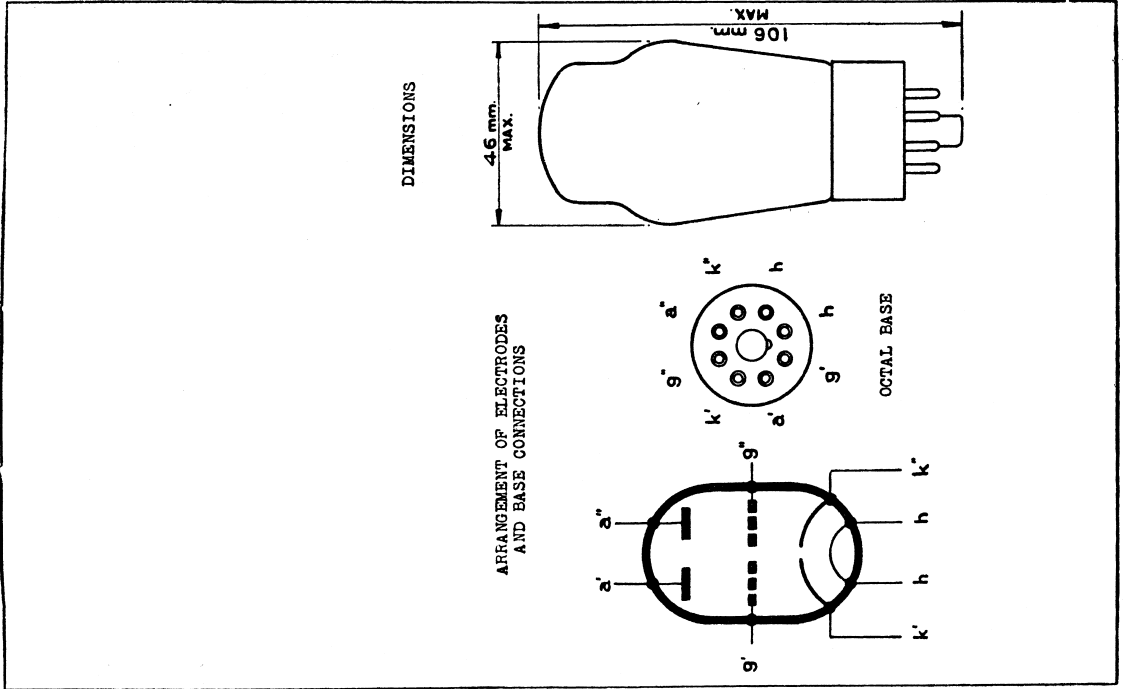


ECC34 TWIN TRIODE (Separate Cathodes)

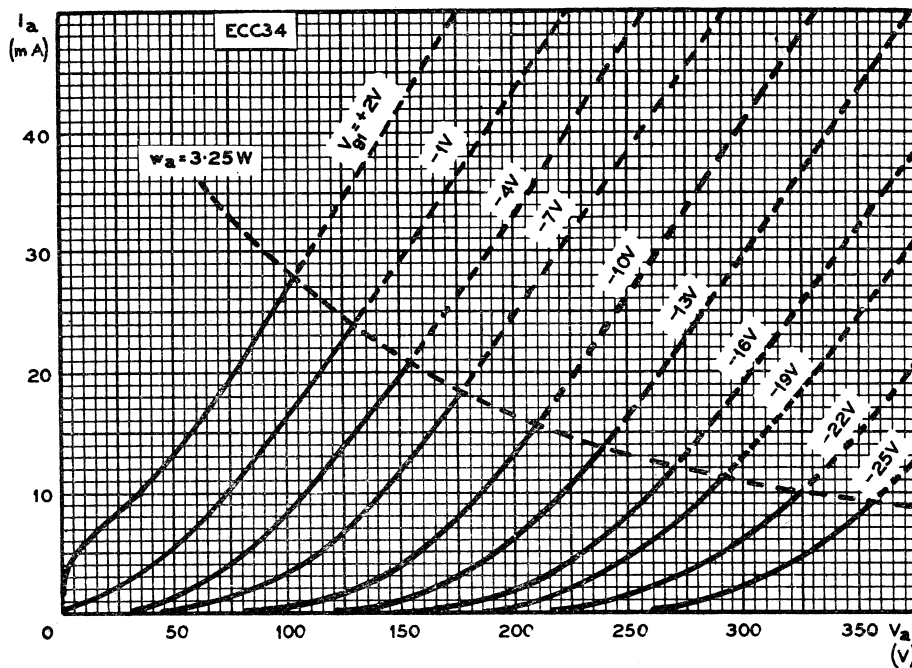

HEATER		V_h	6.3	V
		I_h	0.95	A
CAPACITANCES		C_{a-a}	0.48	μF
		C_{a-g}	4.0	μF
		C_{g-k}	3.5	μF
		C_{g-k}	1.8	μF
Each Section				
TYPICAL OPERATING CONDITIONS		V_a	250	V
		I_a	10	mA
		$-I_f$	16	V
		V_g	2.2	mA/V
		r_a	5,200	ohms
		μ	11.5	
LIMITING VALUES		$V_{a(b)}$ max.	550	V
		V_a max.	300	V
		w_a max.	3.25	W
		I_k max.	50	mA
		V_{h-k} max.	50	V
		R_{h-k} max.	20,000	ohms
		R_{g1} max.	2.0	M.ohms

ECC34 (Continued)

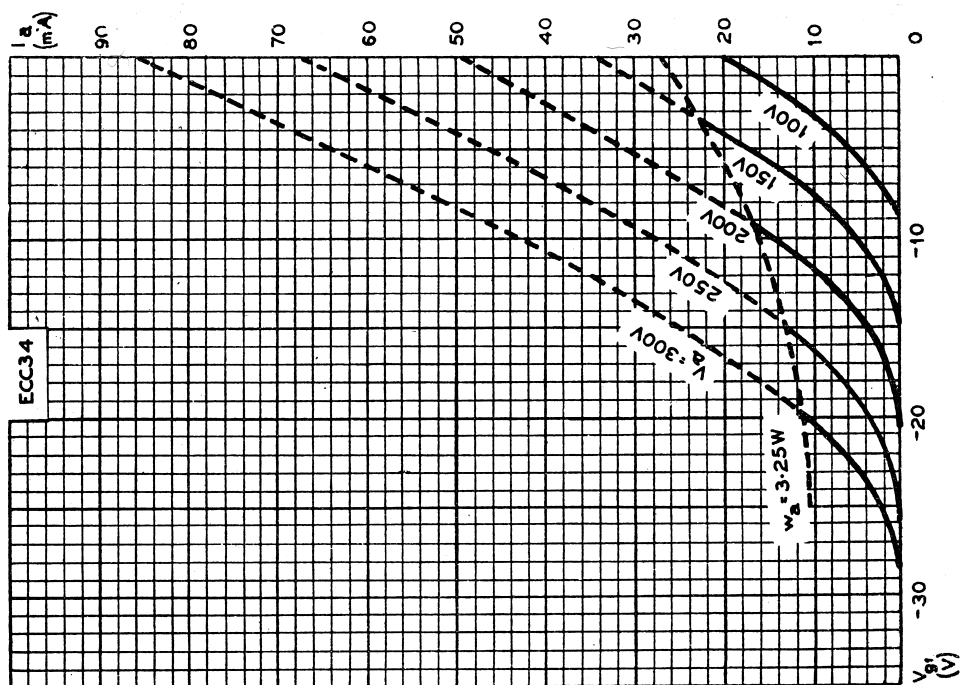

PHILIPS RADIO and TELEVISION MANUAL

Compiled by
E. G. BEARD, S.M.I.R.E., (Aust.)



PHILIPS ELECTRICAL INDUSTRIES OF AUSTRALIA PTY. LTD.
SYDNEY, AUSTRALIA

SECOND EDITION — JANUARY, 1952

ALL RIGHTS RESERVED