



EM84/6FG6

obsolete
10/64
~~EM84~~

ELECTRON-RAY TUBE

9-PIN MINIATURE INDICATOR TYPE WITH TRIODE UNIT

GENERAL DATA

Electrical:


Heater, for Unipotential Cathode:

Voltage (AC or DC)	6.3	volts
Current	0.27	amp

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-27/32"
Maximum Seated Length	2-13/32"
Length, Base Seat to Bulb Top (Excluding tip).	2-7/32" $\pm$ 3/32"
Diameter.	0.750" to 0.875"
Bulb.	T6-1/2
Base.	Small-Button Noval 9-Pin (JEDEC No. E9-1)
Basing Designation for BOTTOM VIEW.	9GA

Pin 1-Triode Grid
Pin 2- Internal Con-
nection—
Do Not Use
Pin 3-Cathode
Pin 4-Heater
Pin 5-Heater



Pin 6-Fluorescent
Target*
Pin 7-Ray-Control
Electrode
Pin 8- Internal Con-
nection—
Do Not Use
Pin 9-Triode Plate

* Fluorescent target is on inner surface of glass envelope above pin 7.

INDICATOR SERVICE

Maximum and Minimum Ratings, Design-Center Values:

RAY-CONTROL-ELECTRODE VOLTAGE:

Without current flowing through series triode-plate resistor.	550 max.	volts
With current flowing through series triode-plate resistor.	300 max.	volts

FLUORESCENT-TARGET VOLTAGE:

Without current flowing through series triode-plate resistor.	550 max.	volts
With current flowing through series triode-plate resistor.	{ 300 max. volts 150 min. volts	

CATHODE CURRENT	3 max.	ma
---------------------------	--------	----

TRIODE-PLATE DISSIPATION.	0.5 max.	watt
-----------------------------------	----------	------

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode . .	100 max.	volts
Heater positive with respect to cathode . .	100 max.	volts

BULB TEMPERATURE (At hottest point on bulb surface).	120 max.	°C
---	----------	----

Typical Operation:

With ray-control electrode connected to triode plate

Triode-Plate Supply Voltage.	250	250	volts
Fluorescent-Target Voltage	250	250	volts

EM84




EM84/6FG6

ELECTRON-RAY TUBE

Series Triode-Plate Resistor . . .	0.47	0.47	megohm
Triode-Grid-Supply Voltage . . .	0	-22	volts
Triode-Grid Resistor	3	3	megohms
Triode-Plate Current	0.45	0.06	ma
Fluorescent-Target Current . . .	1.1	1.6	ma
Length of Dark Part of Fluorescent Target (Dimension "L" on Dimensional Outline)	0.83 ± 0.20	0	inch
Length of Dark Part of Fluorescent Target when triode-grid resistor = 0	0.94 ± 0.20	-	inch

Maximum Circuit Values:

Triode-Grid-Circuit Resistance	3 max.	megohms
--	--------	---------

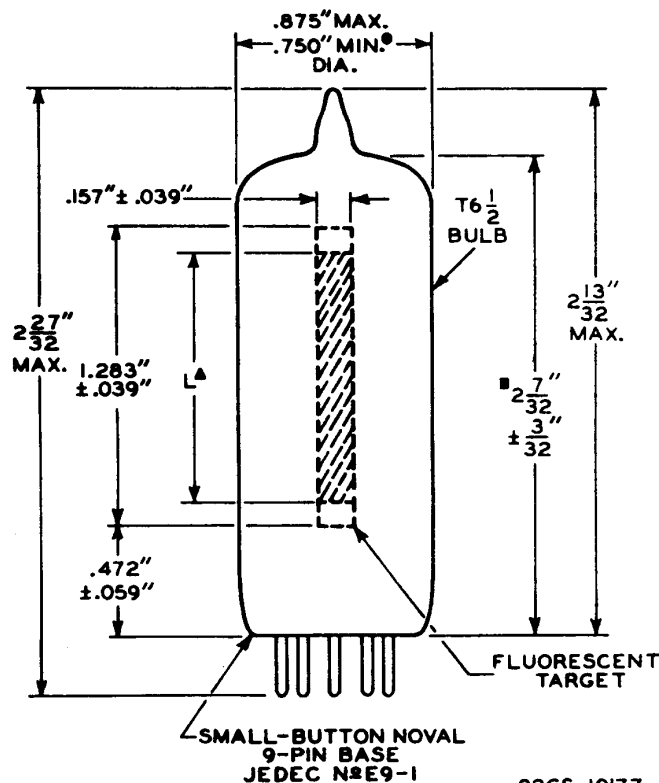

- APPLIES IN ZONE STARTING 0.375" FROM BASE SEAT.
- MEASURED FROM BASE SEAT TO BULB-TOP LINE AS DETERMINED BY RING GAUGE OF 7/16" INSIDE DIAMETER.
- ▲ "L" = LENGTH OF DARK PART OF FLUORESCENT TARGET.




Amble
10/64

EM84

EM84/6FG6

ELECTRON-RAY TUBE

TYPICAL CIRCUIT

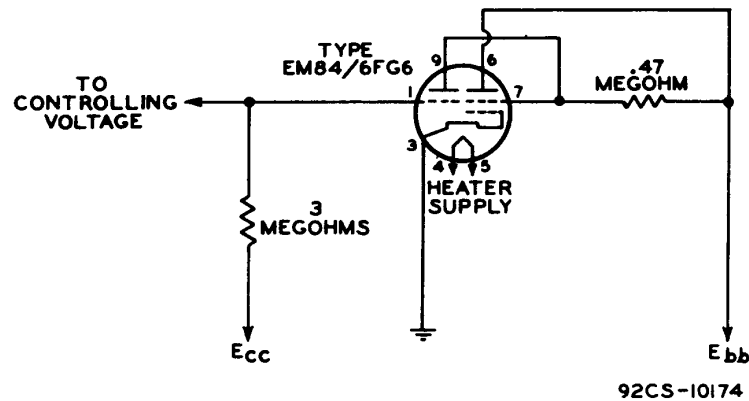


Information furnished by RCA is believed to be accurate and reliable. However, no responsibility is assumed by RCA for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of RCA.

8-59

CE-10174

TYPICAL OPERATION CHARACTERISTIC

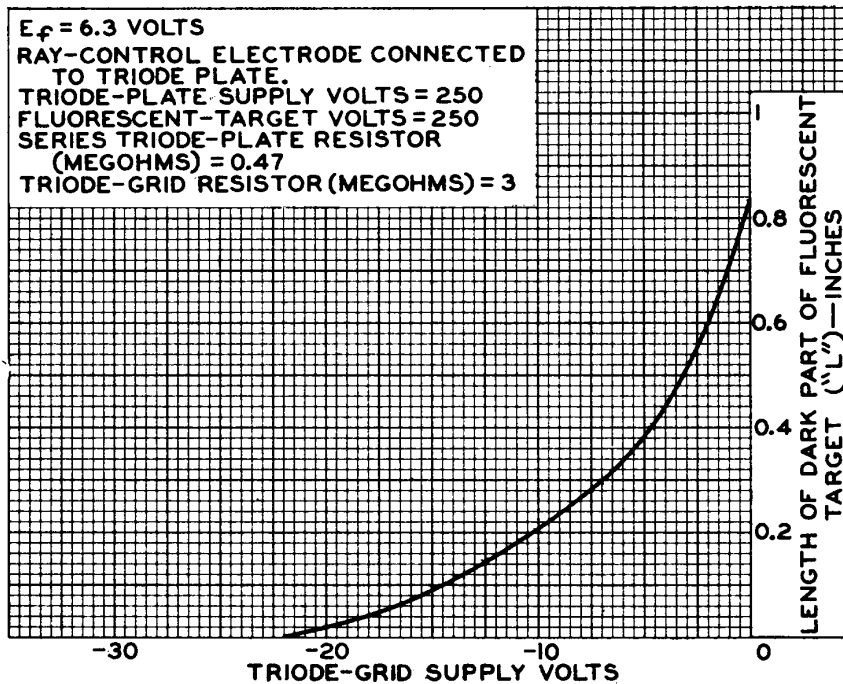

ELECTRON TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CS-10179