

ALIGNMENT PROCEDURE

(Refer to Chassis View)

- Output meter across 3.2-ohm output load.
- Volume control at maximum.
- Connect ground post of signal generator to B— of radio.
- Align for maximum output. Reduce input as needed to keep output near 0.4 volts.

SIGNAL GENERATOR

Frequency	Dummy Antenna	Connection to Radio
455 kc	0.1 mf	Stator of antenna section of gang
1650 kc	0.1 mf	Stator of antenna section of gang
1400 kc	200 mmf	External antenna clip

TUNER SETTING

Rotor full open
(plates out of mesh)

Rotor full open
(plates out of mesh)


1400 kc

ADJUST FOR MAXIMUM OUTPUT (in order shown)

Trimmers on output
and input I.F. cans

Oscillator trimmer C3B

Antenna trimmer C3A

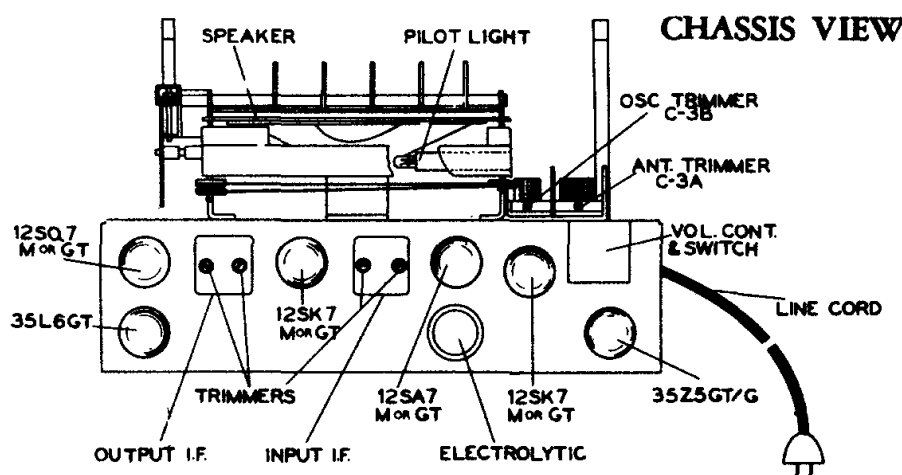

DRIVE CORD REPLACEMENT

