

CHARACTERISTICS

GENERAL DATA

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	66 Degrees
Diagonal	70 Degrees
Phosphor	Aluminized, P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	73 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current ($\pm 10\%$)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μf
Grid No. 1 to All Other Electrodes	6 μf
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	12 $\frac{3}{4}$ x 17 Inches
Bulb Contact, (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12D

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode Voltage	18,000 Volts dc
Grid No. 2 Voltage	410 Volts dc
Grid No. 1 Voltage	
Negative Bias Value	125 Volts dc
Positive Bias Value	0 Volts dc
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

RECOMMENDED OPERATING CONDITIONS

Anode Voltage ¹	16,000 Volts dc
Grid No. 2 Voltage	300 Volts dc
Grid No. 1 Voltage Required for Cutoff ²	-28 to -72 Volts dc
Focusing Coil Current (approx.) ³	95 Ma dc
Ion Trap Magnet Field Strength (approx.)	35 Gauss

CIRCUIT VALUES



Grid No. 1 Resistance	1.5 Megohms Max.
-----------------------	------------------

NOTES:

1. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.
2. Visual extinction of focused raster.
3. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 12 $\frac{3}{4}$ x 17 inch picture area sharply focused at center of screen.

QUICK REFERENCE DATA

Television Picture Tube
 20" Direct Viewed
 Rectangular Glass Type
 Gray Filter Glass
 Magnetic Deflection
 Magnetic Focus
 Single Field Ion Trap
 Spherical Face Plate
 Aluminized Screen
 (20DP4C Has External
 Conductive Coating)



12-D

SYLVANIA ELECTRIC
 PRODUCTS INC.
 TELEVISION PICTURE TUBE
 DIVISION
 SENECA FALLS, NEW YORK

Prepared and Released By The
 TECHNICAL PUBLICATIONS SECTION
 EMPORIUM, PENNSYLVANIA

MAY 14, 1954

SYLVANIA 20DP4B

20DP4C

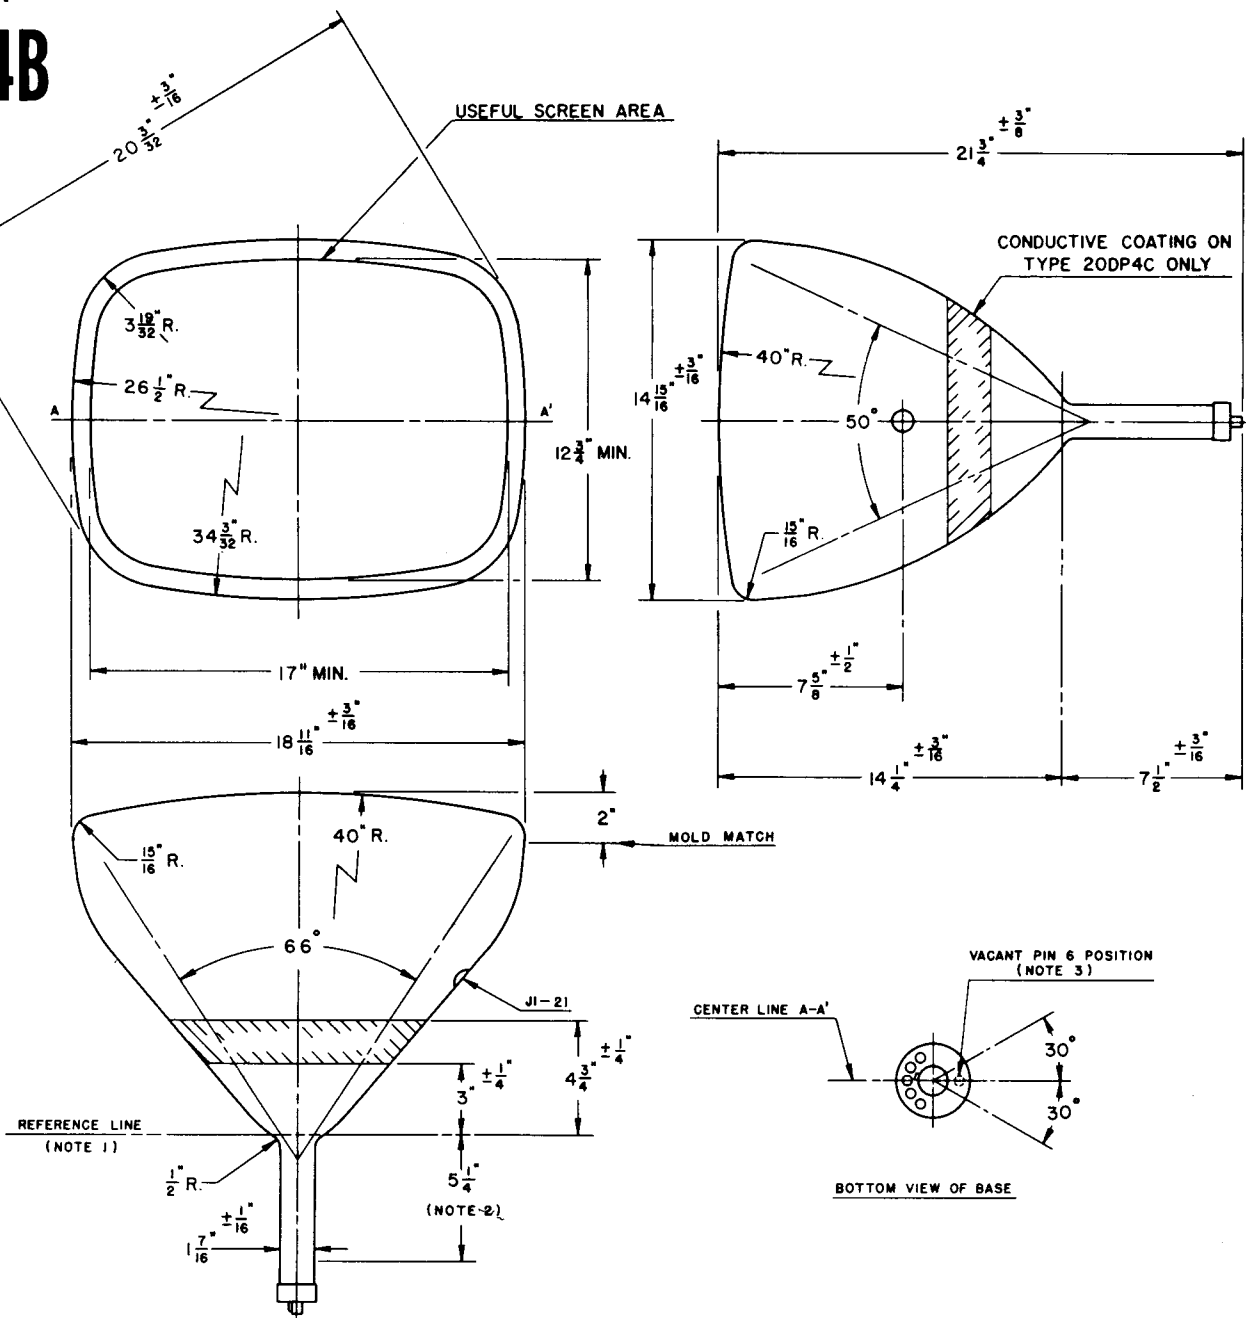


DIAGRAM NOTES:

1. Reference line is determined by the plane of the upper edge of the reference line gauge (JETEC No. 110) when the gauge is resting on the glass cone.
2. Nominal position of ion trap magnet.
3. Anode contact aligns with vacant pin position No. 6 ± 30 degrees.

20DP4C

The Sylvania Type 20DP4C is equivalent to the Type 20DP4B except for the addition of an external conductive coating.

External Conductive Coating to Anode Capacitance


Maximum	750 μf
Minimum	500 μf
Basing	12N

NOTES:

1. External conductive coating must be grounded.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.



12-N