

Esquire RADIO CORPORATION


MODEL 511

Clock-Controlled Radio

AUDIO OUTPUT
50C5

DET. AVC. & A.F. AMP
12AT6 or 12AV6

CONVERTER
12BE6

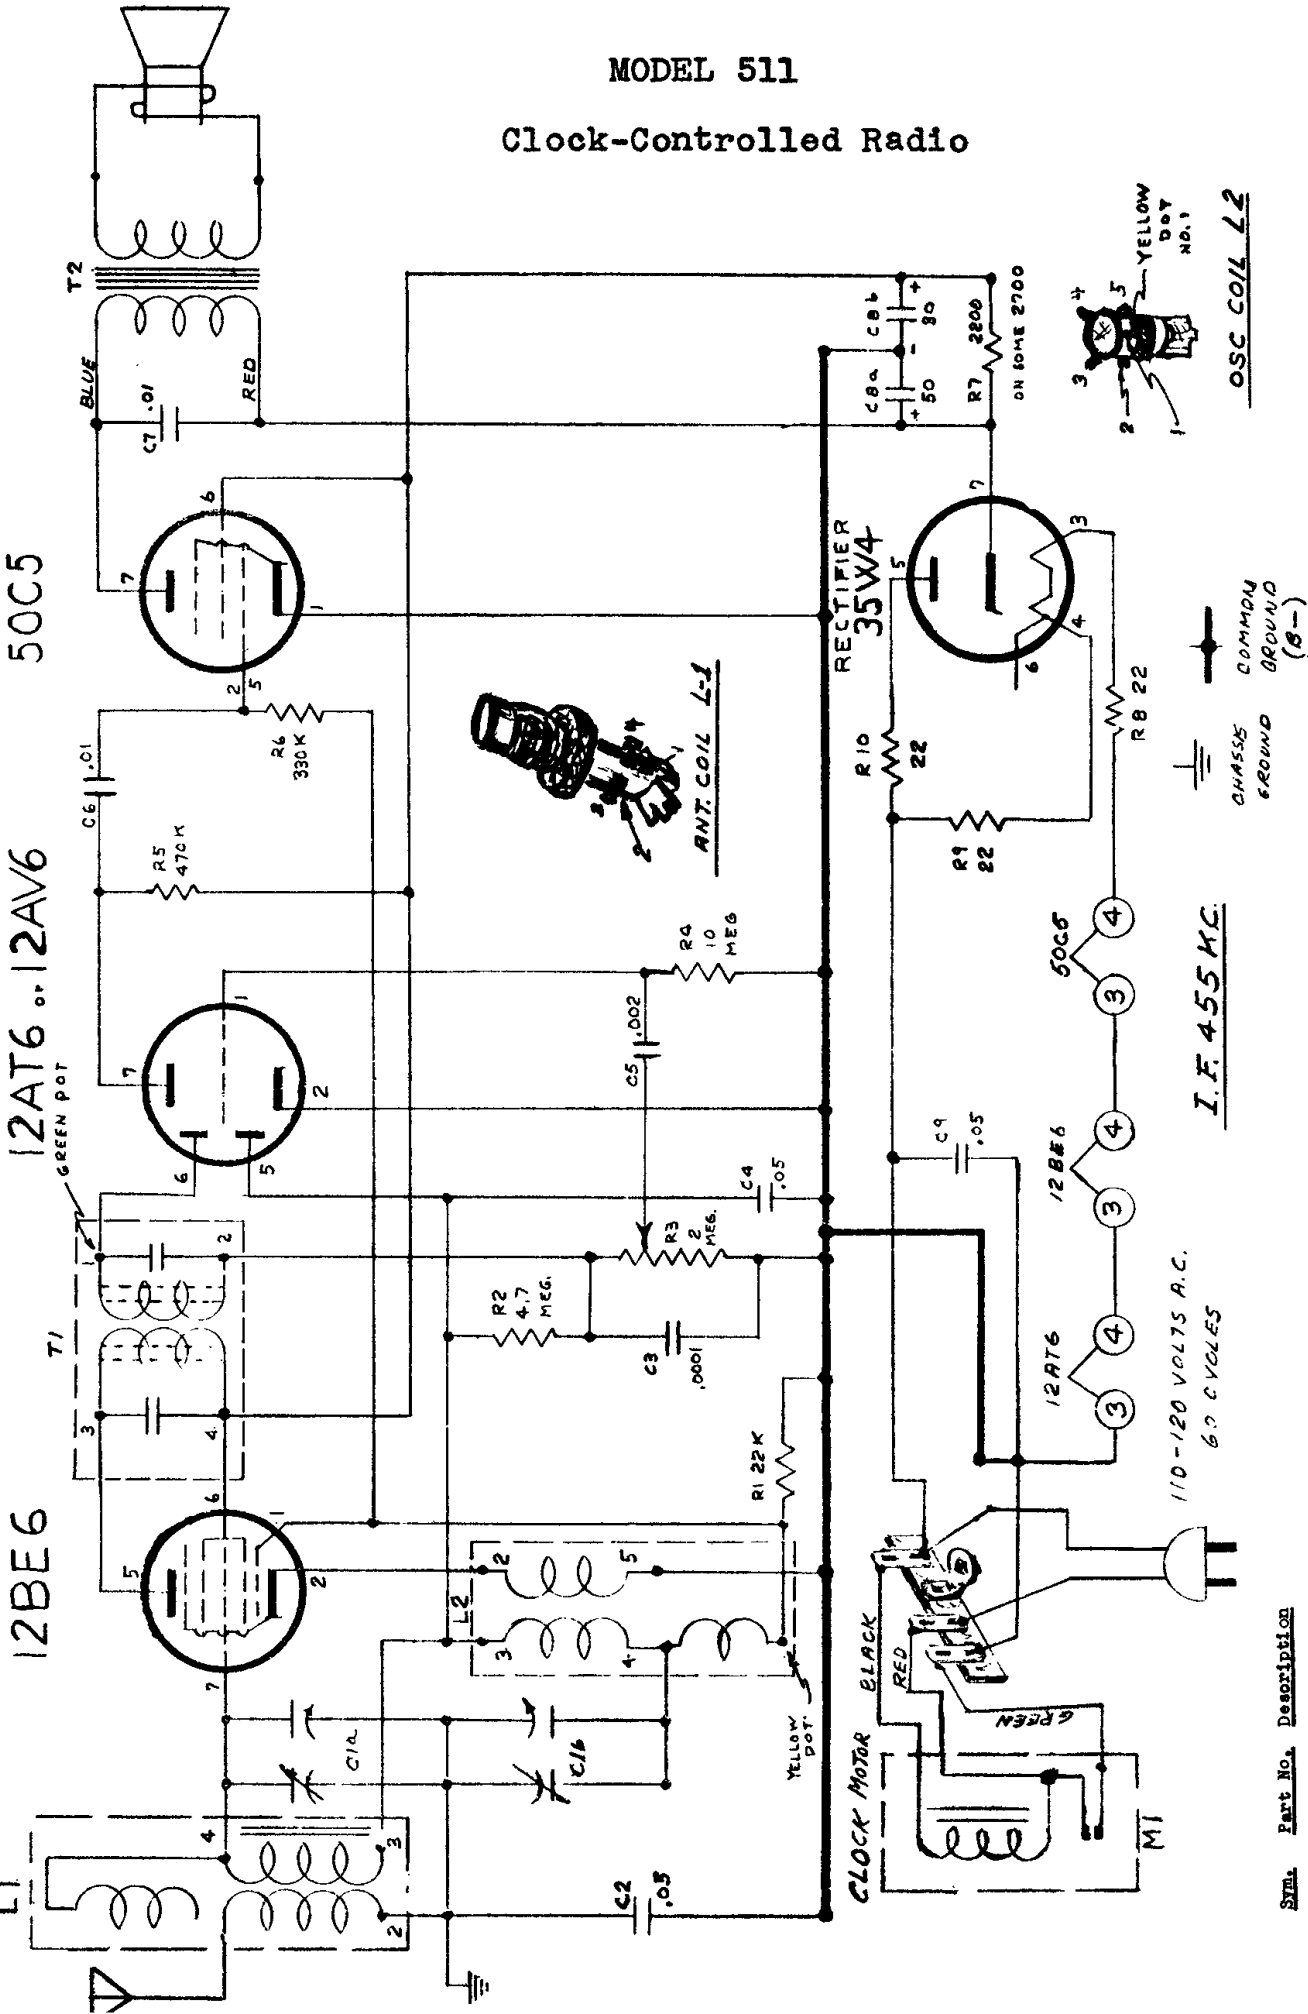

SYM. Part No. Description


M1	13-1	Sessions Timer
R1	20-5	22,000 Ohm 1 Watt Carbon Resistor
R2	20-13	4.7 Megohm 1 Watt Carbon Resistor
R3	20-14	10 Megohm 1 Watt Carbon Resistor
R4	20-9	10,000 Ohm 1 Watt Carbon Resistor
R5	20-8	470,000 Ohm 1 Watt Carbon Resistor
R6	20-1	330,000 Ohm 1 Watt Carbon Resistor
R7	21-1	22 Ohm 1 Watt Carbon Resistor
R8 & R9	21-4	2200 Ohm 1 Watt Carbon Resistor

C1	35-1	2-gang Variable Capacitor
C2	32-2	Electrolytic Capacitor 50-30 mfd. 150V.
C3	30-12	.002 mfd. 200 Volt Tubular Capacitor
C4	30-5	.05 mfd. 200 Volt Tubular Capacitor
C5	30-1	.01 mfd. 200 Volt Tubular Capacitor
C6 & C7	30-6	.05 mfd. 400 Volt Tubular Capacitor
C8	31-1	.0001 mfd. 500 Volt Mica or Ceramic Capacitor

Part No.	Description
89-2	6' Line Cord and Plug
88-1	15' Antenna Hank
25-1	2 Megohm Volume Control
61-1	Oscillator Coil
61-2	Antenna Coil
62-1	I. F. Transformer with Output Transformer
10-1	1/4" P.M. Speaker with Output Transformer



OSC COIL L2



I.F. 455 KC.

110-120 VOLTS A.C.
60 CYCLES