


STEWART-WARNER MODEL R-160 AUTO RADIO CHASSIS (RECEIVER MODELS 1601 to 1609)

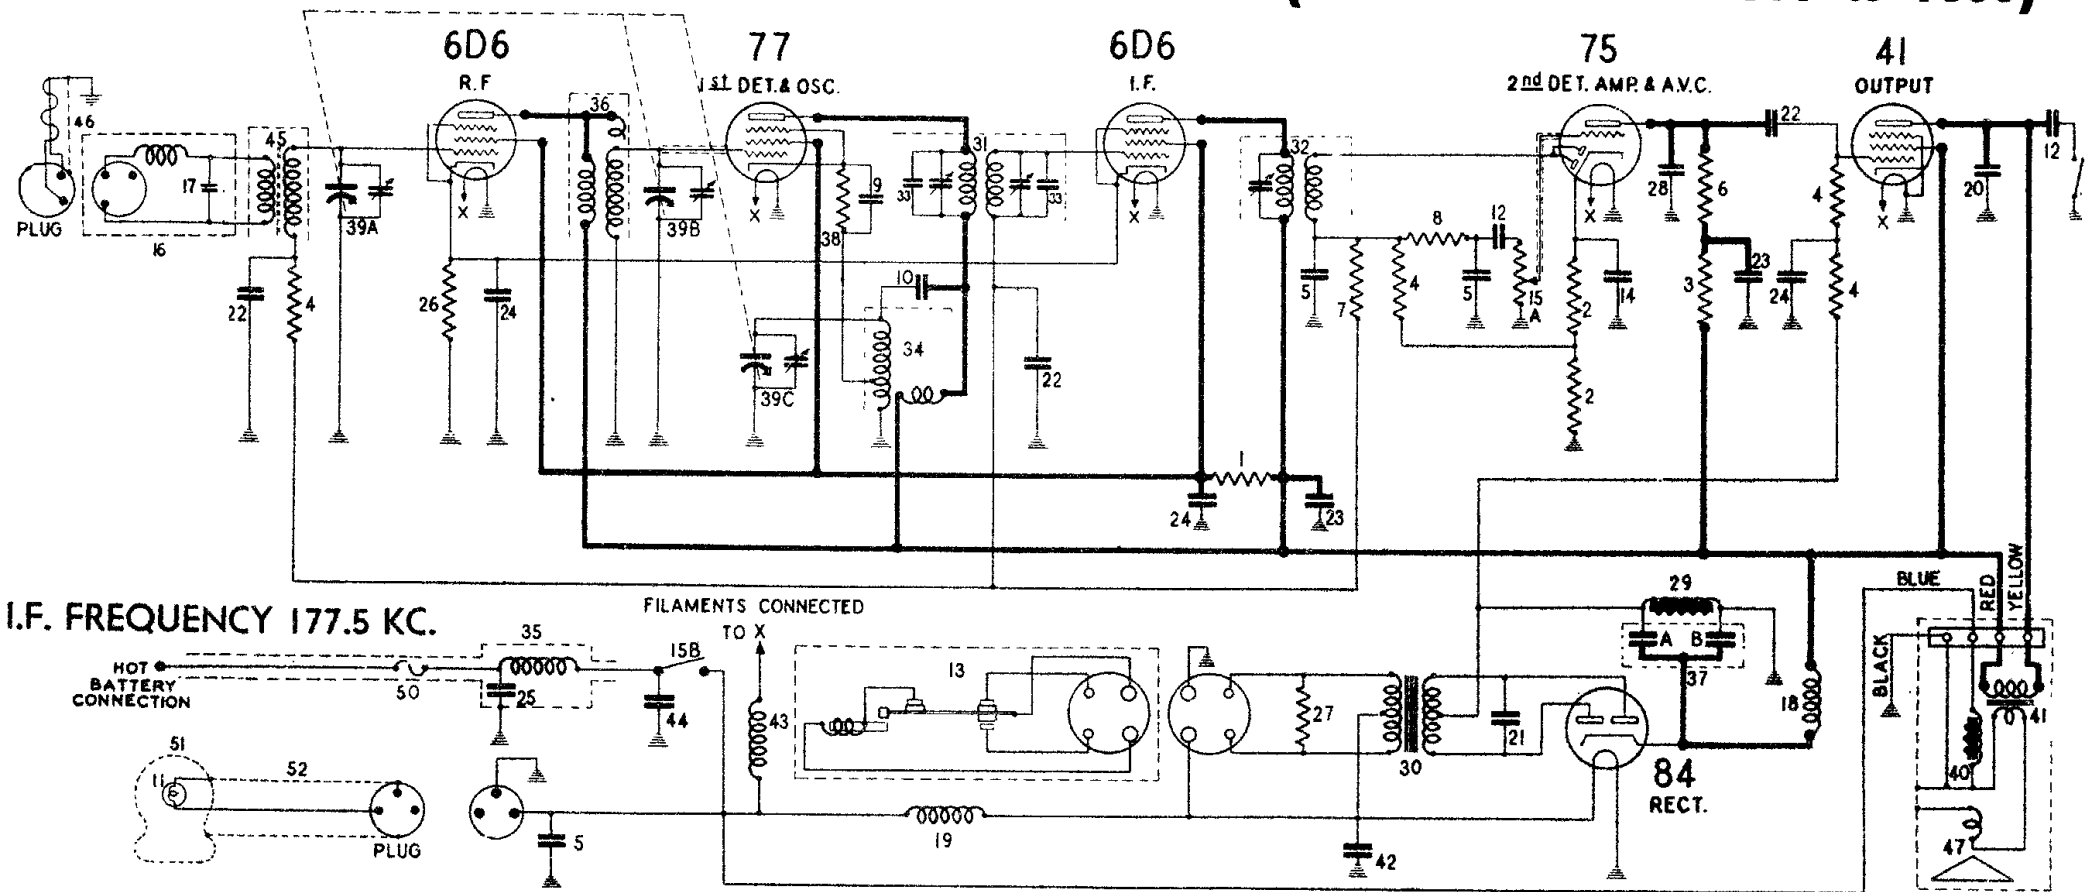


I.F. FREQUENCY 177.5 KC.

FILAMENTS CONNECTED

1	66023	60.000 ohm 1 watt carbon resistor.....
2	67303	2.000 ohm 1/4 watt carbon resistor.....
3	83080	51.000 ohm 1/4 watt carbon resistor.....
4	83082	260.000 ohm 1/4 watt carbon resistor.....
5	83539	260 mmfd. mica condenser.....
48	83777	Battery cable and fuse housing.....
6	84198	110.000 ohm 1/4 watt carbon resistor.....
7	84235	1.1 megohm 1/4 watt carbon resistor.....
8	84238	11.000 ohm 1/4 watt carbon resistor.....
9	81282	.001 mfd. mica condenser.....
10	84833	70 mmfd. mica condenser.....
11	85296	Pilot lamp 6-8 volt (bayonet base).....
12	88026	.02 mfd. 100 volt paper condenser.....
49	88054	Tone control switch.....
13	88156	Vibrator.....
14	88170	10 mfd. 25 volt electrolytic condenser.....
15A}	88171	{Volume control 500,000 ohm}
15B}	88171	{Line switch}
16	88172	Antenna Filter.....
17	88173	50 mmfd. mica condenser.....
18	88181	R. F. choke coil.....
19	88183	R. F. choke coil (to vibrator).....
20	88185	.006 mfd. 600 volt paper condenser.....
21	88187	.01 mfd. 1500 volt paper condenser.....
22	88189	.05 mfd. 200 volt paper condenser.....
23	88191	.1 mfd. 300 volt paper condenser.....
24	88193	.25 mfd. 150 volt paper condenser.....
25	88195	.5 mfd. 150 volt paper condenser.....
26	88203	600 ohm 1/4 watt carbon resistor.....

27	88204	210 ohm 1/2 watt carbon resistor.....
28	88205	.0021 mfd. mica condenser.....
29	88210	Filter choke.....
30	88213	Power transformer.....
31	88222	1st I.F. transformer.....
32	88223	2nd I.F. transformer.....
33	88233	110 mmfd. mica condenser.....
34	88234	Oscillator coil and shield assembly.....
35	88239	"A" filter.....
36	88250	R.F. coil and shield assembly.....
37A}	88256	{Electrolytic condenser 4 mfd. 350 volt}
37B}	88256	{Electrolytic condenser 8 mfd. 350 volt}
38	88257	9.500 ohm 1/4 watt carbon resistor.....
39A to C	88258	Three gang variable condenser.....
40	88274	Field coil and housing (for R-245-A spkr.).....
41	88276	Output transformer.....
42	88285	1.25 mfd. 150 volt paper condenser.....
43	88289	R.F. choke (to filaments).....
44	88298	.25 mfd. 150 volt paper condenser (low reactance).....
45	88312	Antenna coil and shield assem. (iron core).....
46	88327	Antenna cable and plug.....
47	88328	Diaphragm and shell assem. (R-245-A spkr.).....
48	83777	Battery cable and fuse housing.....
49	88054	Tone control switch.....
50	88365	Fuse, 10 amperes.....
51	88730	Control head less shafts.....
52	88738	Pilot light cable with plug, 31".....

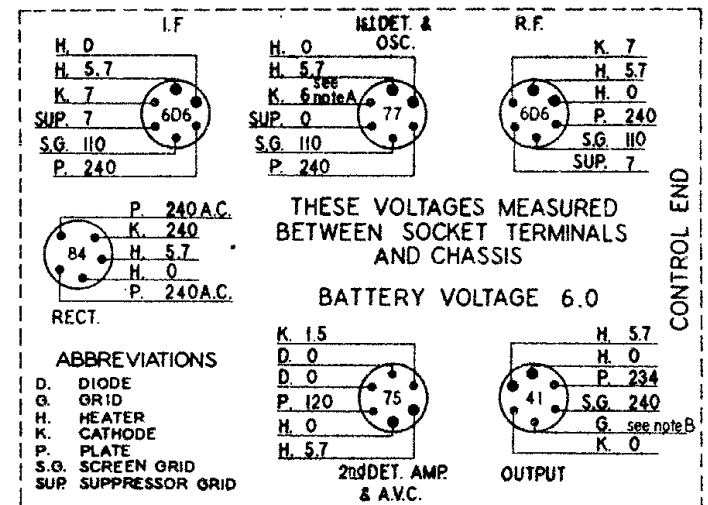

CONTROL END