




Models


RYM/RYMU (224)

## ALIGNMENT

Operation	Connect Oscillator To:	Dummy Ant.	Set Osc. To:	Set Dial To:	Adjust Trimmers	Purpose
1	Converter Grid	.05 MFD.	455 KC	Min. Cap.	C, D, E	Align IF
2	Antenna	100 MMF.	1620 KC	Min. Cap.	B	Set Oscillator
3	Antenna	100 MMF.	1400 KC	1400 KC	A	Adjust Ant.
4	Antenna	100 MMF.	600 KC	600 KC	....	Check Calibration

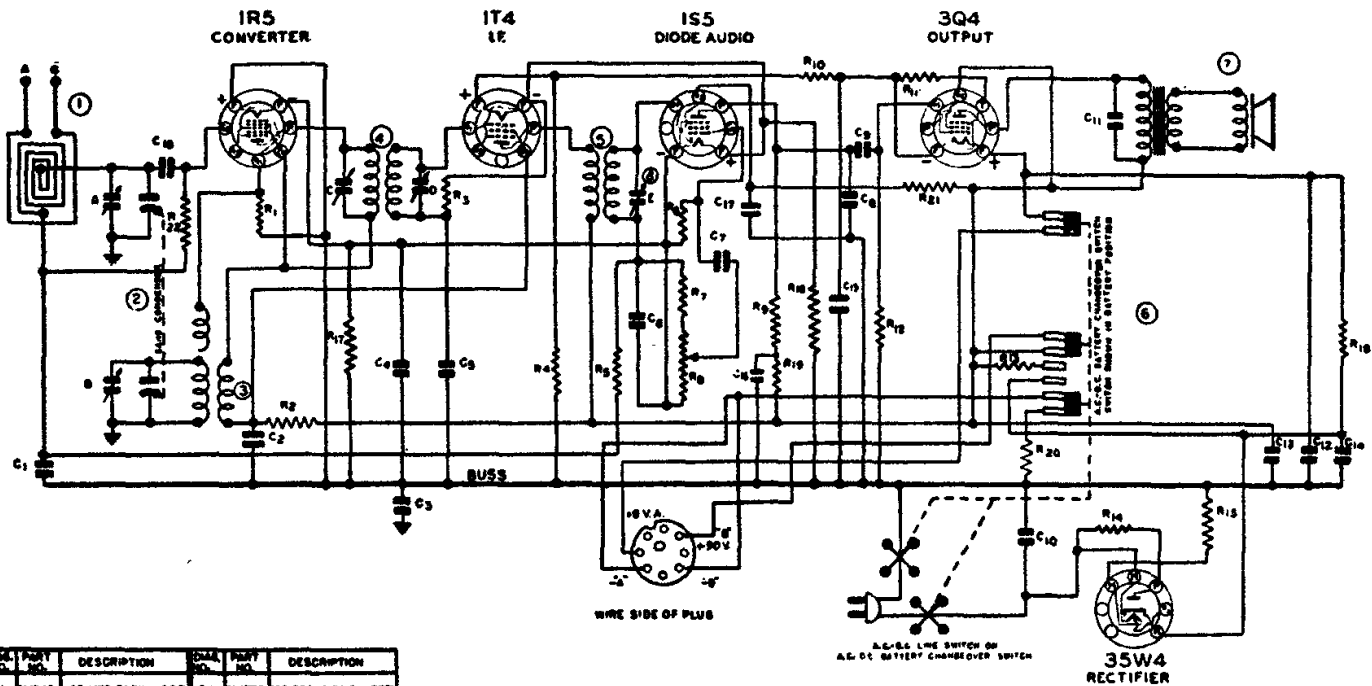

COMP. NO.	PART NO.	DESCRIPTION	COMP. NO.	PART NO.	DESCRIPTION
C1	N-1348	.05 MFD. 200VX 50%	R1	N-1778	100,000 OHM 5% 20%
C2	N-1349	.05 MFD. 200VX 50%	R2	N-4088	10,000 OHM 5% 10%
C3	N-1350	.05 MFD. 200VX 50%	R3	N-1253	10 MEG OHM 5% 20%
C4	N-1351	.05 MFD. 200VX 50%	R4	N-1280	540 OHM 5% 10%
C5	N-1376	.02 MFD. 400VX 20%	R5	N-1277	22 MEG OHM 5% 20%
C6	N-1379	.0001 MFD. 100VX 20%	R6	N-1145	10 MEG OHM 5% 20%
C7	N-1384	.0001 MFD. 100VX 20%	R7	N-4083	47,000 OHM 5% 20%
C8	N-1374	.0001 MFD. 100VX 20%	R8	N-3840	1 MEG. VOLUME CONT.
C9	N-1344	.01 MFD. 400VX 20%	R9	N-2978	1 MEG OHM 5% 10%
C10	N-1348	.05 MFD. 200VX 50%	R10	N-6469	15 OHM 5% 10%
C11	N-2043	.003 MFD. 500VX 10%	R11	N-4120	330 OHM 5% 10%
C12	N-1348	.05 MFD. 200VX 50%	R12	N-1277	22 MEG OHM 5% 20%
C13	N-1348	.05 MFD. 200VX 50%	R13	N-1776	1,500 OHM 5% 20%
C14	N-1348	.05 MFD. 200VX 50%	R14	N-6469	82 OHM 1% 10%
C15	N-1348	.05 MFD. 200VX 50%	R15	N-3342	550 OHM 12.5% 10%
C16	N-1348	.05 MFD. 200VX 50%	R16	N-3054	1,500 OHM 5% 5%
C17	N-1348	.05 MFD. 200VX 50%	R17	N-1776	1,500 OHM 5% 20%
C18	N-1348	.05 MFD. 200VX 50%	R18	N-6082	2,200 OHM 5% 20%
C19	N-1348	.05 MFD. 200VX 50%	R19	N-2973	100,000 OHM 5% 10%
C20	N-1348	.05 MFD. 200VX 50%	R20	N-6463	10 OHM 5% 10%
C21	N-1348	.05 MFD. 200VX 50%	R21	N-6473	22 MEG OHM 5% 10%
C22	N-1348	.05 MFD. 200VX 50%	R22	N-1277	22 MEG OHM 5% 20%

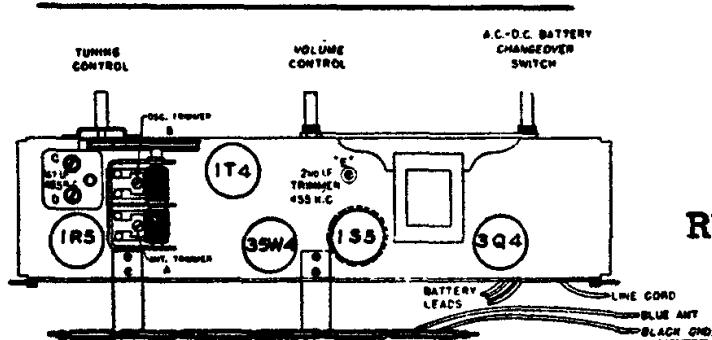

Models

RYM/RYMU (224)