


DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
R1	N-4025	22,000 OHM .5W. 20%	1	N-4815	ANTENNA COIL LOOP
R2	N-3663	150 OHM .5W. 10%	2	N-4810	OSCILLATOR COIL
R3	N-1262	1 MEGOHM .5W. 20%	3	N-4813	1ST LF. TRANSFORMER
R4	N-4063	47,000 OHM .5W. 20%	4	N-4846	2ND LF. TRANSFORMER
R5	N-4843	.5 MEGOHM VOL. CON.	5	N-4318	4" SPEAKER
R6	N-4028	6.8 MEGOHM .5W. 20%	6	N-3889	OUTPUT TRANSFORMER
R7	N-4028	220,000 OHM .5W. 20%	7	N-4812	2 GANG CONDENSER
R8	N-5632	220 OHM .5W. 10%	8	N-4048	TRIMMER
R9	N-4027	470,000 OHM .5W. 20%			
R10	N-5631	22 OHM LW. 10%			
R11	N-4022	33 OHM .5W. 20%			
R12	N-5356	1000 OHM LW. 10%			
R13	N-4027	470,000 OHM .5W. 20%			
C1	N-1345	.05 MFD. 200 V.			
C2	N-1345	.05 MFD. 200 V.			
C3	N-1374	100 MMFD. MICA			
C4	N-4894	.005 MFD. 600 V.			
C5	N-4890	.0005 MFD. 600 V.			
C6	N-1344	.01 MFD. 400V.			
C7	N-1376	.02 MFD. 400V.			
C8	N-1346	.05 MFD. 400V.			
C9	N-3302	35 MFD. 150 V. ELECT.			
C10	N-1344	30 MFD. 150 V. ELECT.			
C11	N-1344	.01 MFD. 400V.			

NOTE: VOLTAGES SHOWN ARE FROM TERMINAL TO BUS-----HEATER VOLTAGES ARE A.C. WHEN LINE VOLTAGE IS ALTERNATING.
 ♦ MEASURED WITH VACUUM TUBE VOLTMETER.

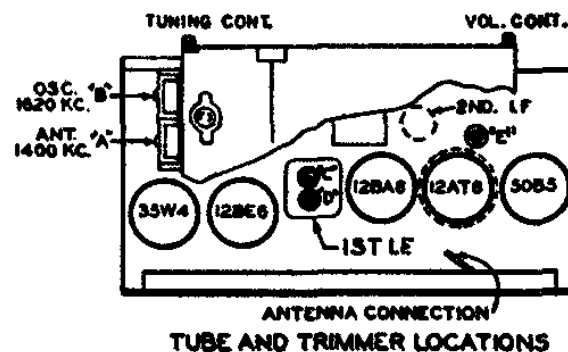

Sonora Radio & Television
Models RBM/RBMU