


# SONORA RADIO Models WGF-241, -242, WGFU-241, -242



DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
R1	N-4025	22,000 OHM .5W 20%	C9	N-5051	40 MFD 150V ELECT.
R2	N-4023	82 OHM 2W 10%	C10	N-5051	40 MFD 150V
R3	N-1262	1 MEGOHM .5W 20%	C11	N-4957	.09 MFD 200V
R4	N-6097	.5 MEGOHM VOL. CON.			
R5	N-4028	6.8 MEGOHM .5W 20%			
R6	N-4026	220,000 OHM .5W 20%	1	N-6100	ANT. COIL LOOP
R7	N-4027	470 000 OHM .5W 20%	2	N-4810	OSCILLATOR COIL
R8	N-4067	180 OHM .5W 10%	3	N-4813	1ST I.F. TRANSFORMER
R9	N-5358	1000 OHM 1W 10%	4	N-4848	2ND I.F. TRANSF.
R10	N-4022	33 OHM .5W 20%	5	N-6102	4" SPEAKER
R11	N-4026	220 000 OHM .5W 20%	6	N-4875	OUTPUT TRANSF.
R12	N-4083	47 000 OHM .5W 20%	7	N-6093	2 GANG CONDENSER
R13	N-1262	1 MEGOHM .5W 20%	8	N-4046	TRIMMER
C1	N-1345	.05 MFD 200V	9	N-5014	PHONO PICKUP
C2	N-1345	.05 MFD 200V	10	N-3848	8" TURNTABLE
C3	N-1346	.05 MFD 400V		N-3860	4 MOTOR
C4	N-1374	100 MMFD MICA			
C5	N-4894	.005 MFD 800V	S1	N-2877	RADIO-PHONO SWITCH
C6	N-4890	500 MMFD 600V	S2	N-2094	MOTOR SW.
C7	N-1344	.01 MFD 400V			
C8	N-1376	.02 MFD 400V			

ALL VOLTAGES SHOWN ARE  
MEASURED FROM TERMINAL  
TO BUSS. LINE VOLTAGE 117A.C.

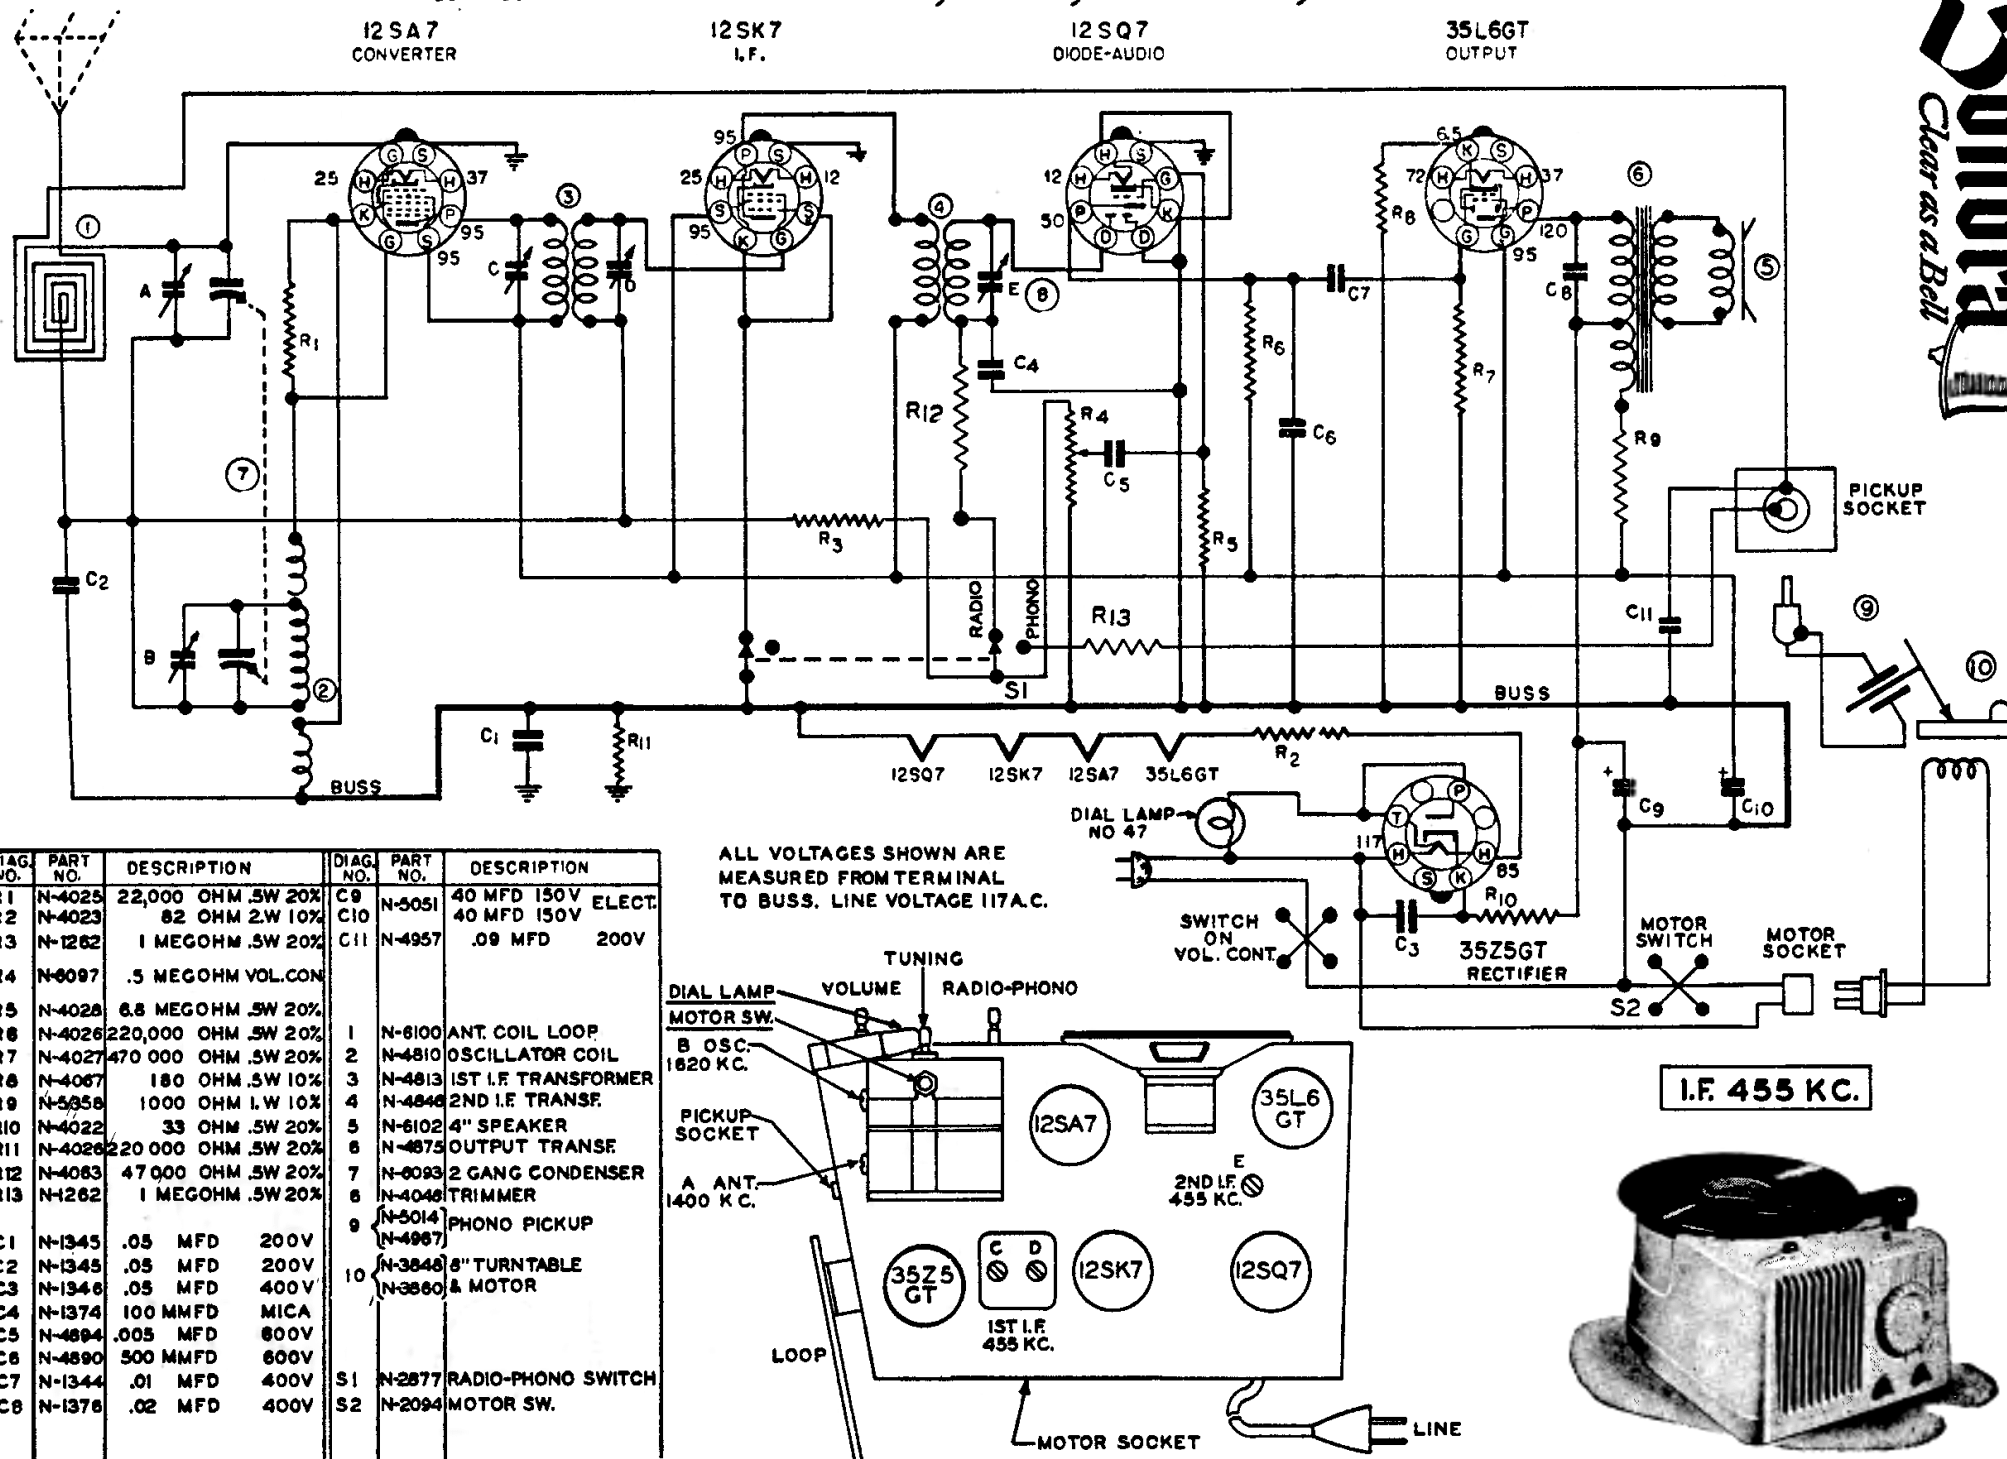