


Part No.	Part Name	Description
R1	N-4062	22,000 Ohm 1/2W. 20%
R2	N-4062	22,000 Ohm 1/2W. 20%
R3	N-1002	1 MEGOHM 1/2W. 20%
R4	N-1002	1 MEGOHM 1/2W. 20%
R5	N-4063	6.8 MEGOHM VOL. CONT.
R6	N-4063	6.8 MEGOHM VOL. CONT.
R7	N-4028	220,000 Ohm 1/2W. 20%
R8	N-4027	470,000 Ohm 1/2W. 20%
R9	N-4066	220 Ohm 1/2W. 10%
R10	N-4066	220 Ohm 1/2W. 10%

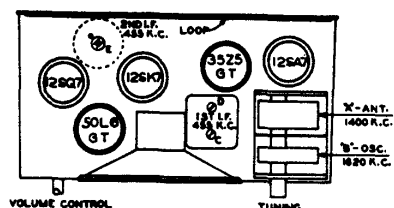

## ALIGNMENT PROCEDURE

STEPS	SET RECEIVER DIAL TO	TEST OSCILLATOR ADJUST TEST OSCILLATOR FREQUENCY TO	ATTACH OUTPUT OF TEST OSCILLATOR TO	DUMMY ANTENNA	ADJUSTMENTS
1	Any point where no interfering signal is received.	EXACTLY 455 KC	High side to grid of 12AU6 Tube. Low side to common negative.	.05 MFD CONDENSER	Adjust slugs at top and bottom of 2nd I.F. (T2) and then each of the slugs of the 1st. I.F. for maximum output.
2	Exactly 1620 KC	Exactly 1620 KC.	External Antenna blue lead on loop.	100 MMFD Condenser.	Adjust 1620 KC oscillator trimmer (C4) for maximum output.
3	Approx. 1400 KC	Approx. 1400 KC	External Antenna blue lead on loop.	100 MMFD Condenser.	Adjust 1400 KC antenna trimmer for maximum output.

C2, C7, C8 N-1345 Condenser, Paper .05 MFD. 200 V  
C6, C13 N-1344 Condenser, Paper .01 MFD. 400 V  
C9 N-8092 Condenser, Paper .08 MFD. 400 V  
C10 N-8015 Condenser, Ceramic 100 MMFD. 500 V. 20%  
C11 N-4894 Condenser, Paper .005 MFD. 600V  
C12 N-6488 Condenser, Ceramic 250 MMFD. 500 V. 20%  
C14 N-1376 Condenser, Paper .02 MFD. 400 V

C15) N-5051 Condenser, Dry Electrolytic (40 MFD. 150 V.)  
C16) (40 MFD. 150 V.)

C17 N-1346 Condenser, Paper .05 MFD. 400 V.

R1 N-4062 Resistor, Carbon 3.3 Megohm 1/2W. 20%  
R2, R3 N-4063 Resistor, Carbon 47,000 Ohm 1/2W. 20%  
R4 N-1262 Resistor, Carbon 1.0 Megohm 1/2W. 20%  
R5 N-6485 Resistor, Carbon 68 Ohm 1/2W. 10%  
R6 N-7984 Volume Control 500,000 Ohm with Switch

R7 N-4028 Resistor, Carbon 6.8 Megohm 1/2W. 20%  
R8 N-4026 Resistor, Carbon 220,000 Ohm 1/2W. 20%  
R9 N-4027 Resistor, Carbon 470,000 Ohm 1/2W. 20%  
R10 N-4067 Resistor, Carbon 180 Ohm 1/2W. 10%

R11 N-3341 Resistor, Carbon 1,000 Ohm 1/2W. 10%

L1 N-8002 Coil, Loop Antenna and Cabinet Back  
L2 N-7982 Coil, Oscillator

T1, T2 N-7981 Coil, 1st. and 2nd. I.F. Transformer  
T3 N-8001 Transformer, Output

N-7981 Speaker, 5 Inch P.M.  
N-8045 Assembly, Variable Gang Condenser & Pulley  
N-8005 Screen, Flocked Dial

N-8004 Knobs, Walnut Plastic ) For Model No.  
#315 Cabinet, Walnut Plastic ) 607-315 Only

N-8003 Knobs, Ivory Plastic ) For Model No.  
#314 Cabinet, Ivory Plastic ) 607-314 only

N-7994 Pointer, Dial Indicator  
N-1090 Line Cord, 6 Foot Rubber  
N-8007

