


Models 521R90 - 521R91 - 5510

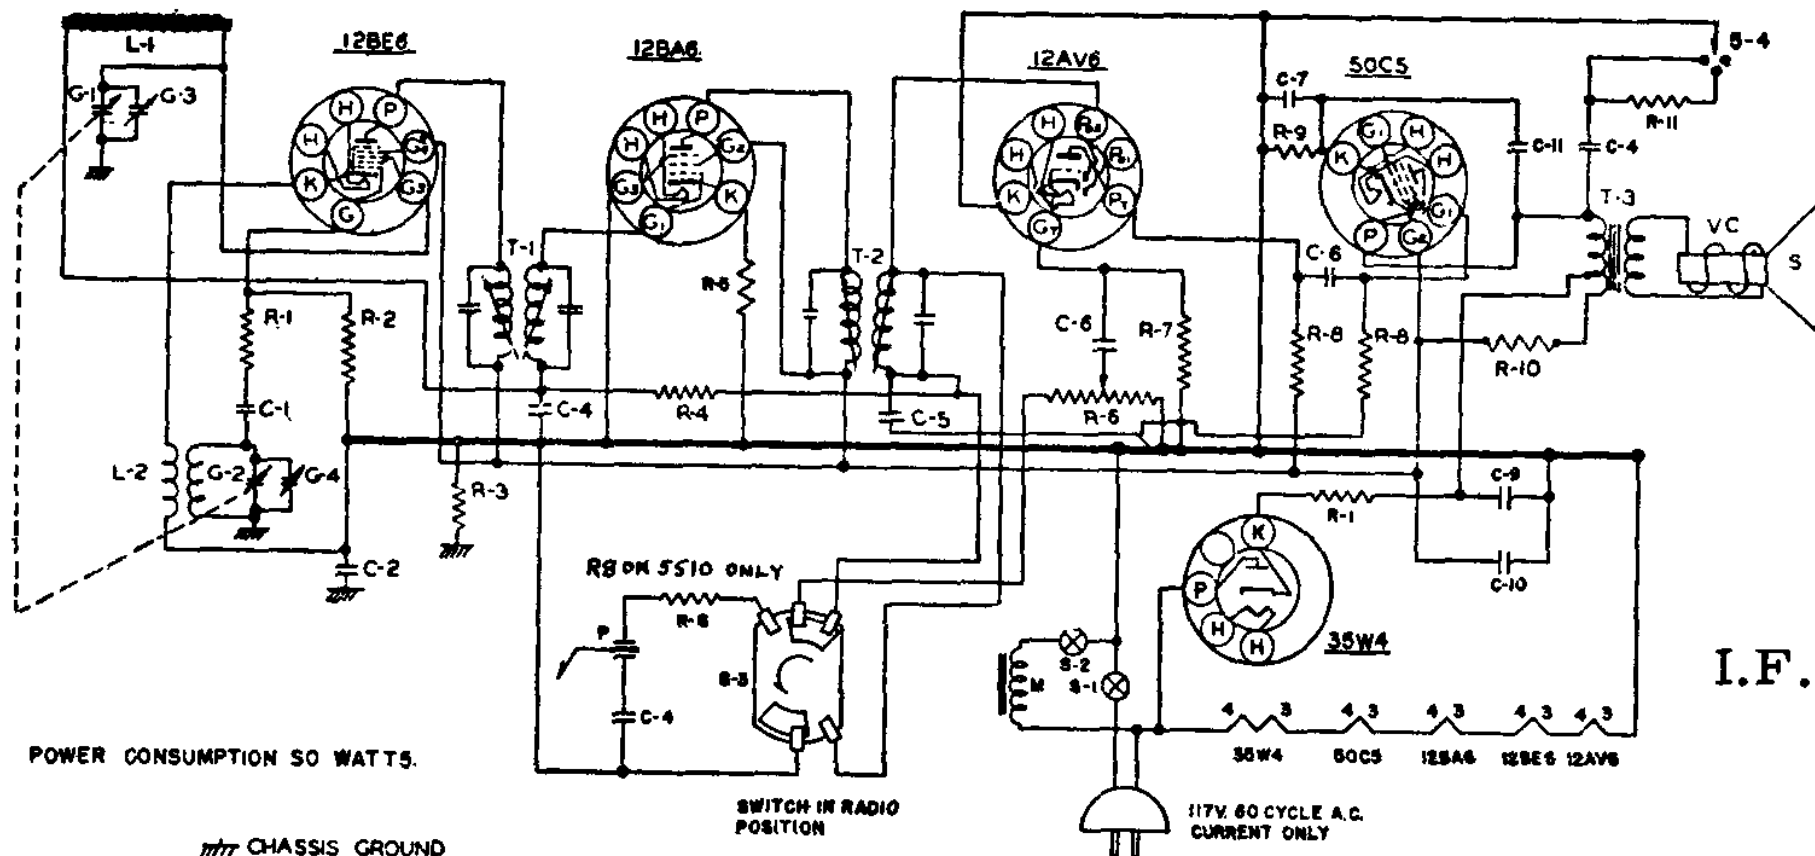

| PART NO. | | DESCRIPTION | PART NO. | | DESCRIPTION | PART NO. | | DESCRIPTION |
|----------|------|----------------------------|----------|------|------------------------------------|----------|-----|--------------------------|
| IR-17 | R-1 | 33~ RESISTOR 1/2W. 20% | GC-12 | C-1 | 47 MMFD CERAMIC CONDENSER | SPK-38 | S | 4" PM SPEAKER |
| IR-9 | R-2 | 22M~ RESISTOR 1/2W. 20% | PC-8 | C-2 | .1MFD. CONDENSER 400 V. | AT-14 | VC | VOICE COIL |
| IR-20 | R-3 | 220M~ RESISTOR 1/2W. 20% | PC-5 | C-4 | .05MFD. CONDENSER 400 V. | LL-39 | T-3 | OUTPUT TRANSFORMER |
| IR-23 | R-4 | 3.3MEG RESISTOR 1/2W. 20% | GC-5 | C-5 | 100 MMFD CERAMIC CONDENSER | LO-21 | L-1 | FERRAMIC ROD ANTENNA |
| IR-114 | R-5 | 220~ RESISTOR 1/2W. 0% | PC-7 | C-6 | .01 MFD CONDENSER 400V. | | L-2 | OSC. COIL |
| VG-4 | R-6 | 1 MEG. VOLUME CONTROL | EG-S4 | C-7 | 5 MFD. @ 25W.V.D.C. ELECTROLYTIC | | | |
| IR-13 | R-7 | 2.2MEG. RESISTOR 1/2W. 20% | | C-9 | 50 MFD.] 150W.V.D.C. ELECTROLYTIC | RC-14 | S-1 | SWITCH ON VOLUME CONTROL |
| IR-11 | R-8 | 470M~ RESISTOR 1/2W. 20% | EG-S3 | C-10 | 50 MFD.] 150W.V.D.C. ELECTROLYTIC | | S-2 | SWITCH ON RECORD CHANGER |
| IR-114 | R-9 | 220~ RESISTOR 1/2W. 20% | GC-S | C-11 | .005MFD. CONDENSER | | P | PICKUP CARTRIDGE |
| IR-42 | R-10 | 1000~ RESISTOR 1W. 10% | | G-1 | TUNING CONDENSER | | M | CHANGER MOTOR |
| IR-18 | R-11 | 4700~ RESISTOR 1/2W. 20% | GC-18 | G-2 | TUNING CONDENSER | SW-1 | S-3 | RADIO-PHONO SWITCH |
| | | | | | | SW-2 | S-4 | TONE CONTROL SWITCH |
| LI-13 | T-1 | INPUT I.F. TRANSFORMER | | | | | | |
| | T-2 | OUTPUT I.F. TRANSFORMER | | | | | | |