


WALGREEN CO.

MODELS 404B, 404I
MODELS 409, 419


4 TUBE T.R.F. RECEIVER AC-DC TYPE

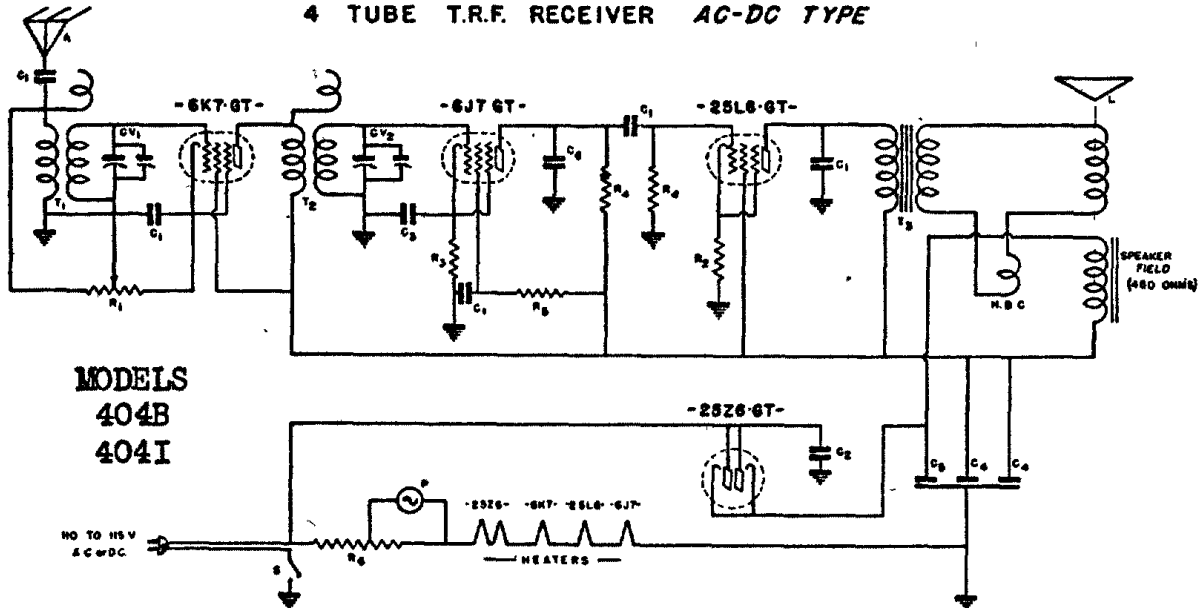


MODELS
404B
404I

LEGEND	OUR PART NO.	DESCRIPTION
C ₁	—	.01MFD 400V TUBULAR CONDENSER
C ₂	—	.02MFD 400V TUBULAR CONDENSER
C ₃	—	.25MFD 25V TUBULAR CONDENSER
C ₄	1N 336	10MFD 150WV ELECTROLYTIC COND.
C ₅	1N 336	20MFD 150WV ELECTROLYTIC COND.
C ₆	—	.00025 MICA CONDENSER
CV ₁₋₂	25P-A	2 BAND VARIABLE CONDENSER
T ₁	A-10	ANTENNA COIL
T ₂	R-10	R.F. COIL
T ₃	1N 823	SPEAKER TRANSFORMER

LEGEND	OUR PART NO.	DESCRIPTION
R ₁	202B	10,000 OHM VOLUME CONTROL
R ₂	—	150 OHM 1/2 WATT CARBON RESISTOR
R ₃	—	25,000 OHM 1/2 WATT CARBON RESISTOR
R ₄	—	500,000 OHM 1/2 WATT CARBON RESISTOR
R ₅	—	2 MEGOHM 1/2 WATT CARBON RESISTOR
R ₆	101-A	210 OHM RESISTANCE LINE CORD
S	—	LINE SWITCH ON VOLUME CONTROL
P	—	MAZDA #4 PILOT LIGHT
A	—	ANTENNA MARK
L	823	DYNAMIC SPEAKER

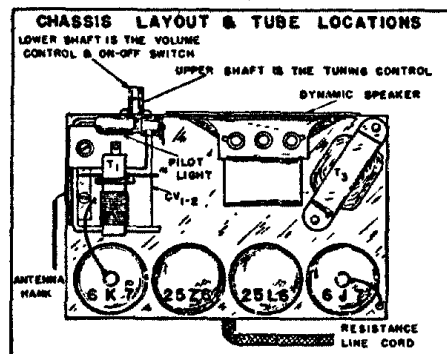


4 TUBE SUPERHETERODYNE RECEIVER - BATTERY OPERATED

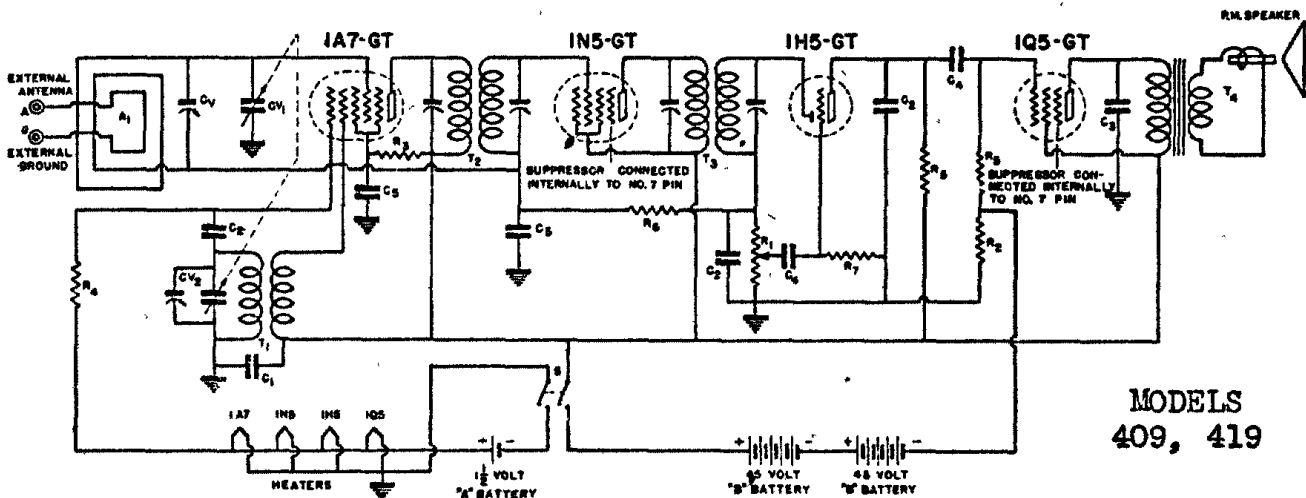

MODELS
409, 419

DIAG. PART NO.	DESCRIPTION
CV ₁₋₂	2 TO 40 MMFD. TRIMMING CONDENSER
C ₁	2 BAND VARIABLE CONDENSER
C ₂	10 MFD. 200V ELECTROLYTIC CONDENSER
C ₃	.00025 MFD 300V TUBULAR CONDENSER
C ₄	.002 MFD. 300V TUBULAR CONDENSER
C ₅	.01 MFD 400V TUBULAR CONDENSER
C ₆	.05 MFD. 200V TUBULAR CONDENSER
A ₁	3518 A ANTENNA LOOP
T ₁	0-8 OSCILLATOR COIL
T ₂	1-3 INPUT I.F. TRANSFORMER
T ₃	0-3 OUTPUT I.F. TRANSFORMER
A ₂	658 A PERMANENT MAGNET SPEAKER
S	SWITCH ON VOLUME CONTROL
R ₁	2009G 500,000 OHM VOLUME CONTROL
R ₂	550 OHM 1/2 WATT CARBON RESISTOR-10%
R ₃	50,000 OHM 1/2 WATT CARBON RESISTOR
R ₄	250,000 OHM 1/2 WATT CARBON RESISTOR
R ₅	500,000 OHM 1/2 WATT CARBON RESISTOR
R ₆	2 MEGOHM 1/2 WATT CARBON RESISTOR
R ₇	3 MEGOHM 1/2 WATT CARBON RESISTOR

BACK VIEW OF CABINET

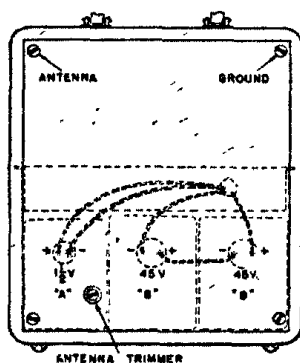

CHASSIS LAYOUT & TUBE LOCATION

