

2BU2

Half-Wave Vacuum Rectifier

T-9 Duodecar Type

Designed to minimize X-Radiation

$-e_{bm} = 30,000$ max. V

$i_{bm} = 80$ mA

ELECTRICAL CHARACTERISTICS – Bogey Values

Heater Voltage, ac or dc	E_h	2.5 ± 0.4	V
Heater Current at $E_h = 2.5$ V	I_h	0.33	A
Direct Interelectrode Capacitance: ^a			
P to (K + IS + H)	c_{p-all}	1.4	pF
Instantaneous Tube Voltage			
Drop for Instantaneous			
Plate Current (i_b) = 7 mA	e_b	60	V

MECHANICAL CHARACTERISTICS

Maximum Overall Length	3.625 in (92.07 mm)
Maximum Seated Length	3.250 in (82.55 mm)
Maximum Bulb Diameter	1.188 in (30.17 mm)
Envelope	JEDEC T9
Top Cap	Small embossed (JEDEC C1-50)
Base	Small-Button Duodecar 12-pin (JEDEC E12-70)
Terminal Diagram	JEDEC 12-JB
Type of Cathode	Coated Unipotential
Operating Position	Any

MAXIMUM RATINGS^b – High Voltage Rectifier

*For operation as a pulsed rectifier tube in a
525-line, 30-frame system^c*

Inverse Plate Voltage ^d			
Total DC and Peak (absolute max.)	$-e_{bm}$	30,000	V
DC (absolute max.)	$E_{b(av)}$	24,000	V
Plate Current:			
Peak (design max.)	i_{bm}	80	mA
Average (design max.)	$I_{b(av)}$	1.5	mA
Heater Voltage (absolute max.)	E_h	2.9	V
Heater Voltage (absolute min.)	E_h	2.1	V

^a Measured without external shield in accordance with the current issue of EIA Standard RS-191.

^b As defined in the current issue of EIA Standard RS-239A.

2BU2

- c As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Communications Commission.
- d This rating is applicable when the duration of the voltage pulse does not exceed 15% of one horizontal scanning cycle. In a 525-line, 30-frame system, 15% of one horizontal scanning cycle is 10 μ s.

OPERATING CONSIDERATIONS

Socket Connections. The base pins of the 2BU2 fit the standard duodecar socket. Socket terminals 2, 3, 4, 5, 6, 7, 9, 10 and 11 may be connected to terminal 1 or to a corona shield which connects to terminal 1. Terminals 4, 10 and 11 may be used as pie points at or near cathode potential. Otherwise, do not use.

Measurement of Heater Voltage. It is recommended that a thermocouple rms voltmeter be used to measure heater voltage. The meter and its leads must be insulated to withstand 30,000 V. To minimize loading of the rectifier circuit during this measurement, stray capacitances to ground should be kept as low as possible.

X-Radiation Characteristic

X-Radiation, Maximum

0.5 mR/hr

Operation of the 2BU2 outside of the absolute values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these absolute values are not exceeded.

X-Radiation is measured in accordance with JEDEC Publication No. 67A, "Recommended Practice for Measurement of X-Radiation from Receiving Tubes", and controlled in accordance with JEDEC Publication No. 73A, "Recommended Practice for Quality Control of X-Radiation Emitted from High Voltage Rectifier and Shunt Regulator Receiving Tubes".

Warning

X-Radiation

The high voltages associated with the 2BU2 result in production of X-Radiation which may constitute a health

2BU2

hazard on prolonged exposure at close range unless the tube is adequately shielded. Equipment design must provide for this shielding.

Precautions must be exercised during the servicing of equipment employing the 2BU2 to assure that the high voltage is adjusted to the recommended value and that any shielding components are replaced to their intended positions before the equipment is operated.

Shock Hazard


The high voltages at which the 2BU2 is operated can be extremely dangerous to the user or serviceman. Extreme care should be taken in the use of, and for the servicing and adjustment of, any high voltage circuit.

Precautions must be exercised during the replacement or servicing of the 2BU2 in equipment to assure that the high voltage output terminal is properly grounded while inserting or removing the tube from its socket or while disconnecting the top cap connector.

THE EQUIPMENT MANUFACTURER SHOULD PROVIDE A WARNING LABEL IN AN APPROPRIATE POSITION ON THE EQUIPMENT TO ADVISE THE SERVICEMAN OF ALL PRECAUTIONS HEREIN.


TERMINAL DIAGRAM — JEDEC 12JB — Bottom View

- Pin 1 - Heater, Cathode, Internal Shield
- Pin 2 - Heater, Cathode, Internal Shield
- Pin 3 - Do Not Use
- Pin 4 - No Connection
- Pin 5 - Heater, Cathode, Internal Shield
- Pin 6 - Do Not Use
- Pin 7 - Heater, Cathode, Internal Shield
- Pin 8 - Heater
- Pin 9 - Heater, Cathode, Internal Shield
- Pin 10 - No Connection
- Pin 11 - No Connection
- Pin 12 - Heater
- Cap - Plate



2BU2

DIMENSIONAL OUTLINE

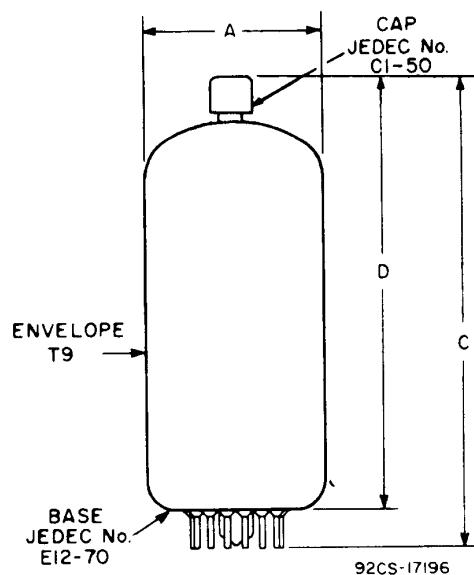

DIMENSION	INCHES		MILLIMETERS	
	Min.	Max.	Min.	Max.
A	1.062*	1.188	27.0*	30.17
C	—	3.625	—	92.07
D	3.000	3.250	76.2	82.55
MILLIMETER DIMENSION DERIVED FROM INCH DIMENSION				
* Applies to the minimum diameter except in the area of the seal.				