



MARCONI 54

ZF = 455 kHz T.A.

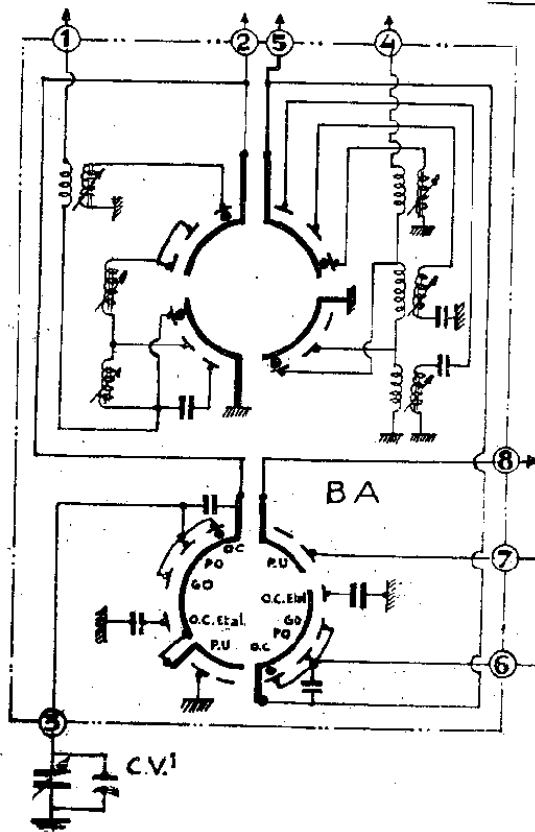

BROCHAGE DES LAMPES VUE DE DESSOUS

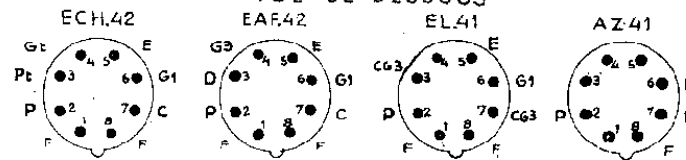

C.1	500pF ± 20% - papier - 1500V	61210	R.1	20KΩ ± 10%	1/4 W.	60192	CV1	Condensat. variable accord.	62610
C.2	30pF ± 10% - mica - 500V	44242	R.2	500KΩ ± 10%	1/4 W.	46575	CV2	Condensat. variable oscil.	63562
C.3	450pF ± 10% - mica - 500V	63796	R.3	20KΩ ± 10%	1/4 W.	60192	B.A	Bloc d'accord	63774
C.4	0,1µF ± 10% - papier - 750V	43135	R.4	30KΩ ± 10%	1/2 W.	45404	M.F.1	Transfo moy. fréquence 1	63562
C.5	50pF ± 10% - mica - 500V	44419	R.5	30KΩ ± 10%	1 W.	45565	M.F.2	Transfo moy. fréquence 2	63563
C.6	450pF ± 10% - mica - 500V	63796	R.6	30KΩ ± 10%	1/4 W.	46345	T.A	Transfo d'alimentation 50V	63744
C.7	58000pF ± 10% - papier - 750V	41988	R.7	2MΩ ± 10%	1/4 W.	46572	T.S	Transfo de sortie	63746
C.8	500pF ± 20% - papier - 1500V	61210	R.8	2MΩ ± 10%	1/4 W.	46572	P	Potentiomètre interruptif	61653
C.9	0,1µF ± 10% - papier - 750V	43135	R.9	1MΩ ± 10%	1/4 W.	46815	F.M.F	Filtre moyenne fréquence	63485
C.10	10000pF ± 20% - papier - 1500V	43490	R.10	100KΩ ± 10%	1/4 W.	46574	L.C	Lampe cadran 6,3V, 0,3A	41036
C.11	100pF ± 10% - mica - 500V	60827	R.11	200KΩ ± 10%	1/4 W.	46536	Fu	Fusible 1 amp (fusion)	62850
C.12	200pF ± 10% - mica - 500V	61041	R.12	50KΩ ± 10%	1/4 W.	45013	H.P	Haut-Parleur	63407
C.13	25000pF ± 20% - papier - 1500V	46669	R.13	1MΩ ± 10%	1/4 W.	46815			
C.14	3500pF ± 10% - papier - 1500V	60605	R.14	100KΩ ± 10%	1/4 W.	46574			
C.15	32µF ± 5% - Elect. - 450V	63440	R.15	200KΩ ± 10%	1/4 W.	46536			
C.16	50µF ± 10% - Elect. - 350/400V	63588	R.16	3KΩ ± 10%	2 W.	63004			
C.17	10000pF ± 20% - papier - 3000V	45637	R.17	120Ω ± 5%	1/2 W.	63633			