
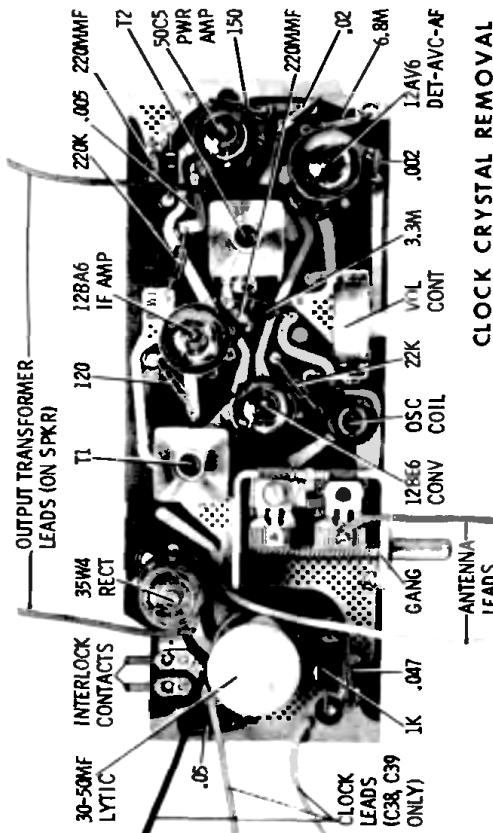


MODELS A26,A27,C38,C39

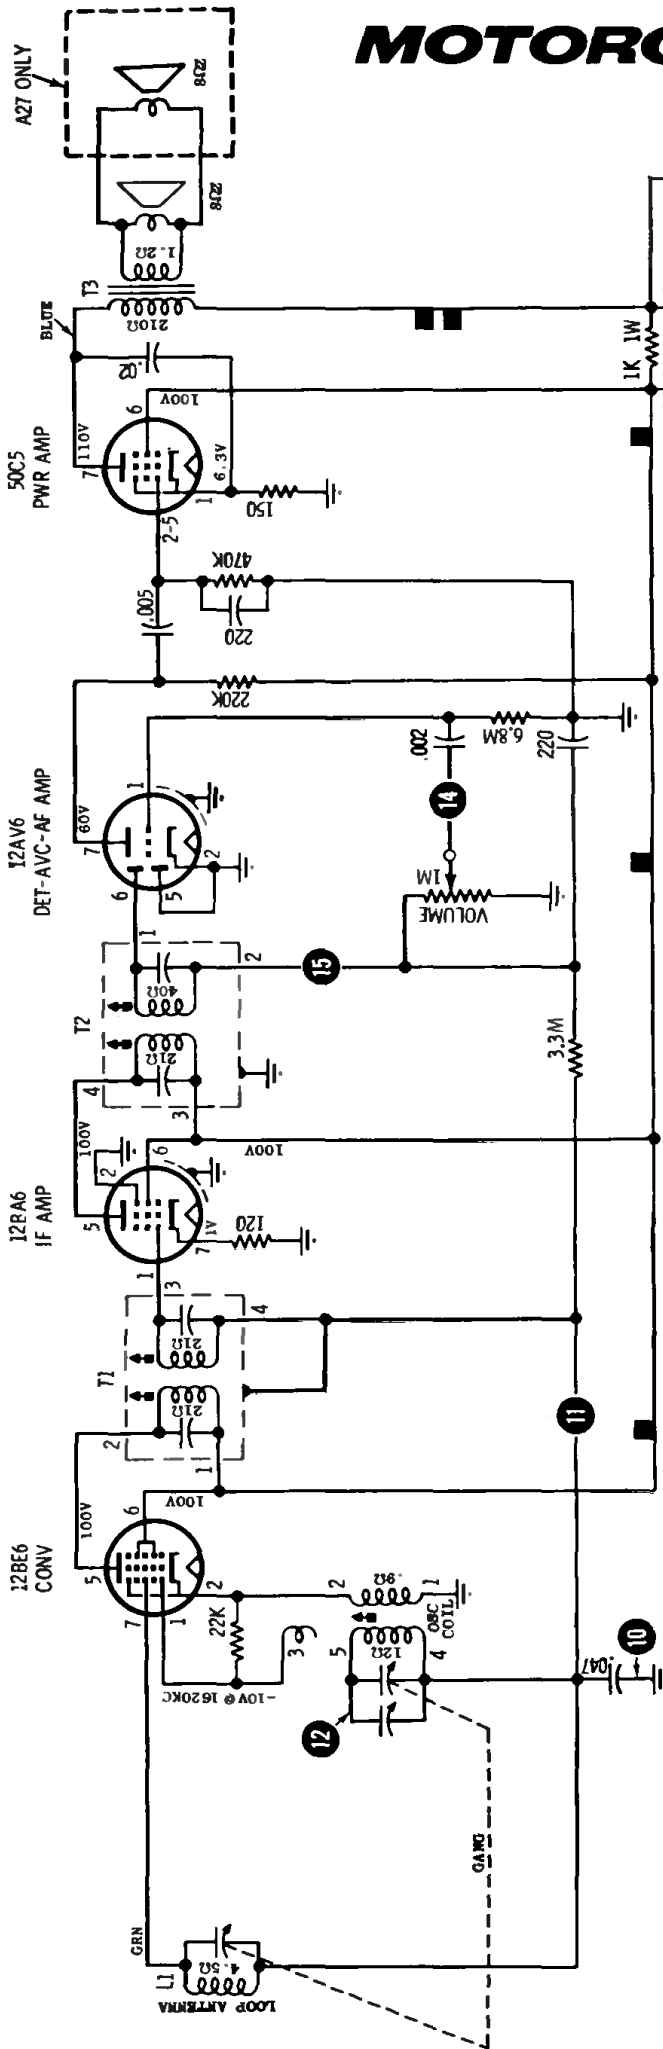


CHASSIS REMOVAL

1. Remove cabinet back - 4 screws hold it in place.
2. Remove chassis mounting screw at base of chassis and screw at tuning gang mounting bracket.


CLOCK CRYSTAL REMOVAL
(Models C38 and C39)

1. Pull off clock knobs.
2. Insert screwdriver between cabinet and bottom edge of clock crystal (near 6 o'clock on clock face) to release catch; then lift out crystal.

NOTE: Use caution when removing crystal because the cabinet front can be easily scratched. DO NOT allow the screwdriver or tab on the crystal to slide across the cabinet.

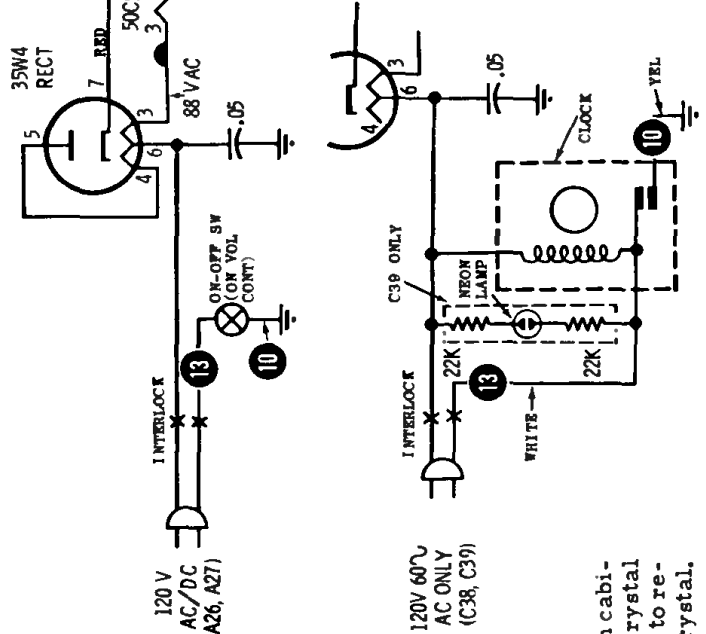

NOTES:
CAPACITORS - UNLESS OTHERWISE SPECIFIED,
DECIMAL VALUES IN MF, ALL OTHERS IN MMF.
VOLTAGES - MEASURED FROM POINT INDICATED
TO CHASSIS WITH A VTVM. \pm 10% NO SIGNAL
INPUT
TUNING RANGE - 535KC TO 1620KC (IF - 455KC)
PLATED BOARD WIRING LEGEND

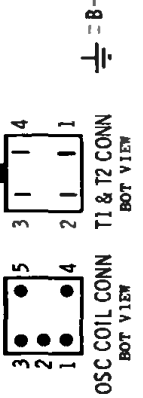

USC COIL CONN
11 & 12 CONN
BOT VIEW BOT VIEW