


SCHEMATIC DIAGRAM MODEL 40-81 CODES 121 & 122.

PHILCO

Models 40-81, Codes 121, 122

SCHE. No.	DESCRIPTION	PART No.		
1	Loop Assembly (Part of Cabinet)	10413A	9	1st I. F. Transformer Assembly
2	Mica Condenser (15 mmfd.)	61-0036	10	Tubular Condenser (.05 mfd.)
3	Mica Condenser (110 mmfd.)	30-1031	11	Resistor (10.0 meg., 1/2 watt)
4	Resistor (220,000 ohms, 1/2 watt)	33-422339	12	Resistor (4.7 meg., 1/2 watt)
5	Oscillator Transformer	32-3277	13	Volume Control and On-Off Switch
6	Resistor (33,000 ohms, 1/2 watt)	33-333339	14	Tubular Condenser (.004 mfd.)
7	Tubular Condenser (.01 mfd.)	30-4572	15	Resistor (4.7 meg., 1/2 watt)
8	Tuning Condenser Assembly	31-2432	16	Mica Condenser (250 mmfd.)
			17	2nd I. F. Transformer Assembly
			18	Resistor (1.8 meg., 1/2 watt)
			19	Tubular Condenser (.004 mfd.)
			20	Resistor (4.7 meg., 1/2 watt)
			21	Resistor (650 ohms, 1/2 watt)
			22	Mica Condenser (500 mmfd.)
			23	Output Transformer
			24	Cone and Voice Coil Assembly (Speaker Part No. 36-1461-3)
			25	Electrolytic Condenser (10 mfd., 150 V.)
			26	Resistor (6600 ohms, 1/2 watt)

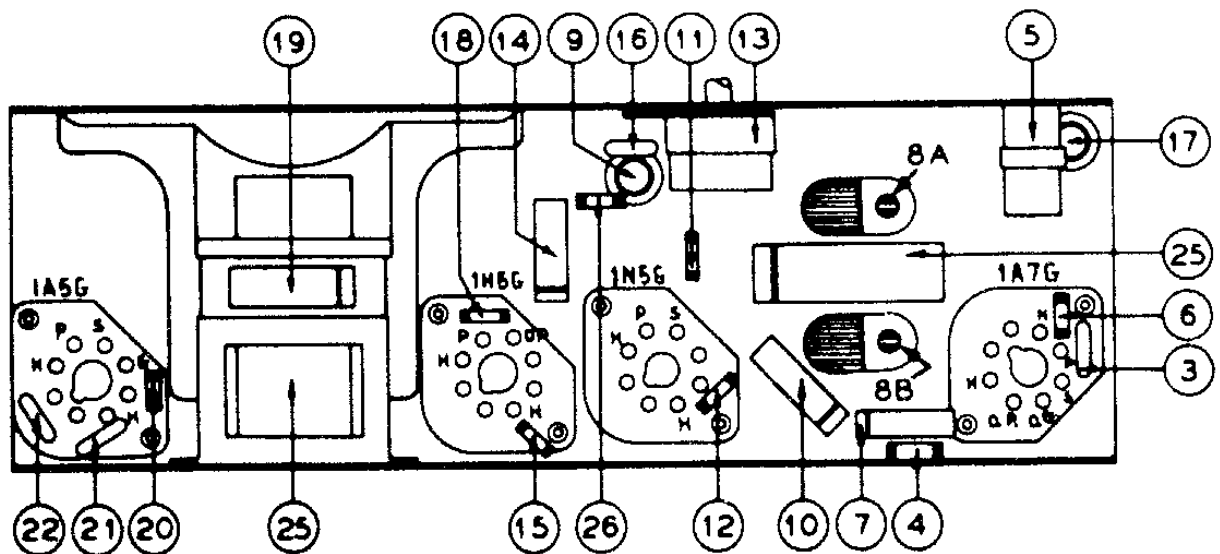

PART LOCATIONS, UNDERSIDE OF CHASSIS, MODEL 40-81