
NL-714/7021 & NL-5557/FG17/715 THYRATRON TUBES

1 Amperes D.C. — 3 Amperes Peak

NATIONAL POWER TUBE NL-714 is a quick heating industrial thyratron designed especially for timing control and regulated rectifier applications. It is gas and mercury filled for quick starting and constancy of characteristics within wide temperature limits.

NL-5557/715 has the same general characteristics, within its narrower temperature limits, but is filled with mercury only to permit use of the tube at higher voltages such as are found in the amateur radio transmitter application.

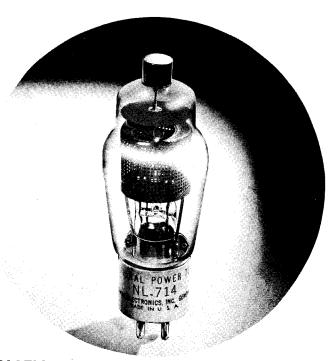

TECHNICAL INFORMATION

	NL-714	NL	← NL-5557 / 715 →		
dc Amperes output (maximum)	. 1.0	.25	.5	1.0	
Instantaneous Amperes output (maximum)	3	1	2	3	
Maximum time of averaging anode current (seconds)	5	5	5	5	
Maximum peak inverse volts	1250	10,000	5,000	1250	
Maximum peak forward volts	1250	E 000	2 500	1050	
Condensed mercury temperature limits (°C)	-40 to ±80	⊥40 to ⊥60		1040 100	
riiament voits	25			2 5	
riiament amperes	ちまち			c + c	
Deating time (seconds)	E			_	
ypical arc grop at 3 amperes peak (volts)	15			S IE	
Grid control characteristic	• • • • • •	See C	IPVA	15	
Maximum negative grid voltage before conduction (volts)	500	500 500			
Maximum negative grid voltage during conduction (volts)	10	• • • • • • • • •		500	
Maximum critical grid current (microamps)	5	• • • • • • • •		10	
lonization time (approx., microseconds)	10	* * * * * * * * *		5	
Deionization time (approx., microseconds)	1000	• • • • • • • •	`	1000	
Anode to grid capacitance (uuf)	2			1000	
Maximum ac short circuit current (amperes)	50	• • • • • • •		Z 50	
Approx. temp. rise, cond. mercury above ambient (°C)	15			50	
Mounting position	13	Vortical L		15	
Net weight (ounces)	 3	Terrical, D	ase down	` •	
Approx. shipping weight (lbs.)				3	
11 9 (200)	.			3	

ALL DATA ARE BASED ON RETURNS TO FILAMENT CENTER TAP

LIGHT FILAMENT BEFORE APPLYING LOAD

Printed in U.S.A. 1/68


NATIONAL ELECTRONICS, INC.


a varian subsidiary


GENEVA, ILLINOIS, 60134

TELEPHONE 312 232-4300 TWX 910 237-1685

OUTLINE DRAWING

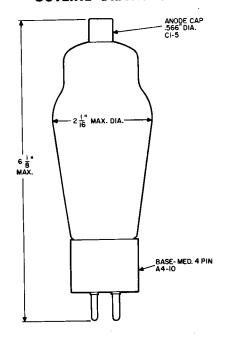



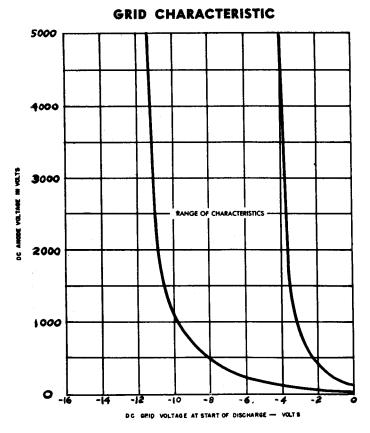

NATIONAL ELECTRONICS, INC.