



PHILCO RADIO & TELEVISION CORP.

MODEL 800

MODEL 800 PARTS LIST

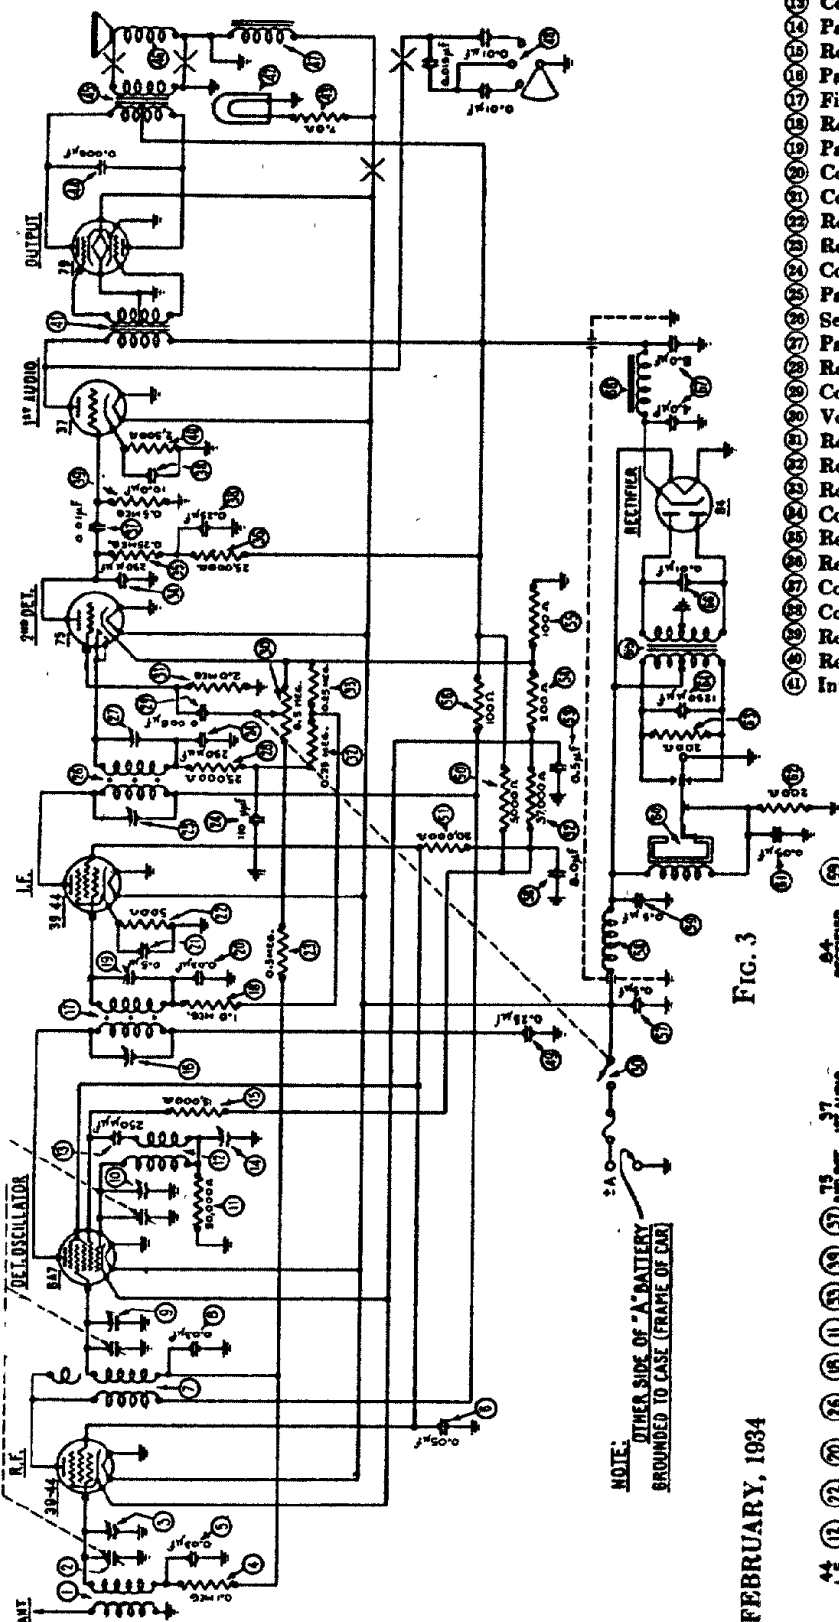

- | | | | | | |
|----|------------------------------------|---------|----|--------------------------------|---------|
| 1 | Antenna Transformer .. | 32-1220 | 42 | Pilot Lamp | 34-2031 |
| 2 | Tuning Condenser | 31-1083 | 43 | Resistor (7 ohms) | 33-3130 |
| 3 | 1st Padder (in tuning cond.) | | 44 | Condenser (.006 mfd.) | 30-4024 |
| 4 | Resistor (100,000 ohms) | 6009 | 45 | Output Transformer | 32-7203 |
| 5 | Condenser (.03 mfd.) | 30-4025 | 46 | Cone and Voice Coil | 36-3159 |
| 6 | Condenser (.05 mfd.) | 30-4020 | 47 | Field Coil Assembly | 36-3130 |
| 7 | R. F. Transformer | 32-1221 | 48 | Tone Control | 30-4142 |
| 8 | Condenser (.03 mfd.) | 30-4025 | 49 | Condenser (.25 mfd.) | 30-4134 |
| 9 | 2nd Padder (in tuning cond.) | | 50 | Resistor (5,000 ohms) | 33-1070 |
| 10 | 3rd Padder (in tuning cond.) | | 51 | Resistor (20,000 ohms) | 6649 |
| 11 | Resistor (50,000 ohms) | 6008 | 52 | Resistor (37,000 ohms) | 33-1098 |
| 12 | Oscillator Transformer .. | 32-1222 | 53 | Condenser (.5 mfd.) | 30-4018 |
| 13 | Condenser (.00025 mfd.) .. | 3082 | 54 | Resistor (200 ohms) | 7217 |
| 14 | Padder | 31-6012 | 55 | Resistor (100 ohms) | 33-3023 |
| 15 | Resistor (15,000 ohms) | 6208 | 56 | Resistor (100 ohms) | 33-3023 |
| 16 | Padder (prim. 1st I. F.) | | 57 | Condenser (.5 mfd.) | 30-4015 |
| 17 | First I. F. Transformer .. | 32-1236 | 58 | Vibrator Choke | 32-1335 |
| 18 | Resistor (1,000,000 ohms) .. | 33-1093 | 59 | Condenser (.5 mfd.) | 30-4113 |
| 19 | Padder (secondary 1st I. F.) .. | | 60 | Vibrator Unit | 32-6036 |
| 20 | Condenser (.03 mfd.) | 30-4025 | 61 | Condenser (.05 mfd.) | 30-4039 |
| 21 | Condenser (.5 mfd.) | 30-4058 | 62 | Resistor (200 ohms) | 7217 |
| 22 | Resistor (500 ohms) | 6077 | 63 | Resistor (200 ohms) | 7217 |
| 23 | Resistor (500,000 ohms) .. | 6097 | 64 | Condenser (.00125 mfd.) .. | 5858 |
| 24 | Condenser (.00011-.00025) .. | 30-1020 | 65 | Power Transformer | 32-7098 |
| 25 | Padder (prim. 2nd I. F.) | | 66 | Condenser (.01 mfd.) | 30-4051 |
| 26 | Second I. F. Transformer .. | 32-1237 | 67 | Filter Condenser (4-8 mfd.) .. | 30-2015 |
| 27 | Padder (secondary 2nd I. F.) .. | | 68 | "B" Choke | 32-7104 |
| 28 | Resistor (25,000 ohms) | 33-1013 | | Spark Plug Resistors | 33-1015 |
| 29 | Condenser (.006 mfd.) | 30-4125 | | Distributor Resistor | 4548 |
| 30 | Volume Control Assembly .. | 33-5058 | | Interference Condenser | 30-4007 |
| 31 | Resistor (2,000,000 ohms) .. | 33-1025 | | Dial | 27-6022 |
| 32 | Resistor (250,000 ohms) | 33-1097 | | Studs | 28-6036 |
| 33 | Resistor (250,000 ohms) | 33-1097 | | Nuts (mounting) | W55 |
| 34 | Condenser (.00025 mfd.) | 5858 | | Knobs | 03334 |
| 35 | Resistor (250,000 ohms) | 33-1097 | | Battery Cable | 39-5296 |
| 36 | Resistor (25,000 ohms) | 33-1013 | | Antenna Lead | 38-5131 |
| 37 | Condenser (.01 mfd.) | 30-4145 | | Control Unit Assembly | 42-6077 |
| 38 | Condenser (.25-8-10 mfd.) .. | 30-4135 | | Acorn Nut | W821 |
| 39 | Resistor (500,000 ohms) | 6097 | | Key | 6091 |
| 40 | Resistor (2500 ohms) | 33-1100 | | Flex. Shaft (28") Vol. Con. .. | 28-8141 |
| 41 | Input Transformer | 32-7206 | | Flex. Shaft (28") Tun. Con. .. | 28-8139 |

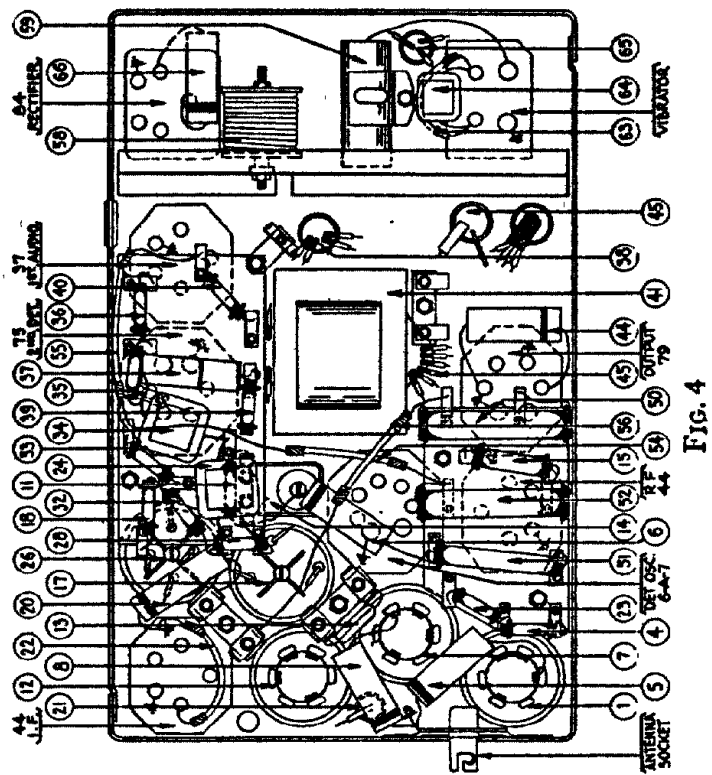

FEBRUARY, 1934