



Westinghouse CHASSIS V-2164-2

Models H-400P4, H-401P4, H-402P4, H-403P4.

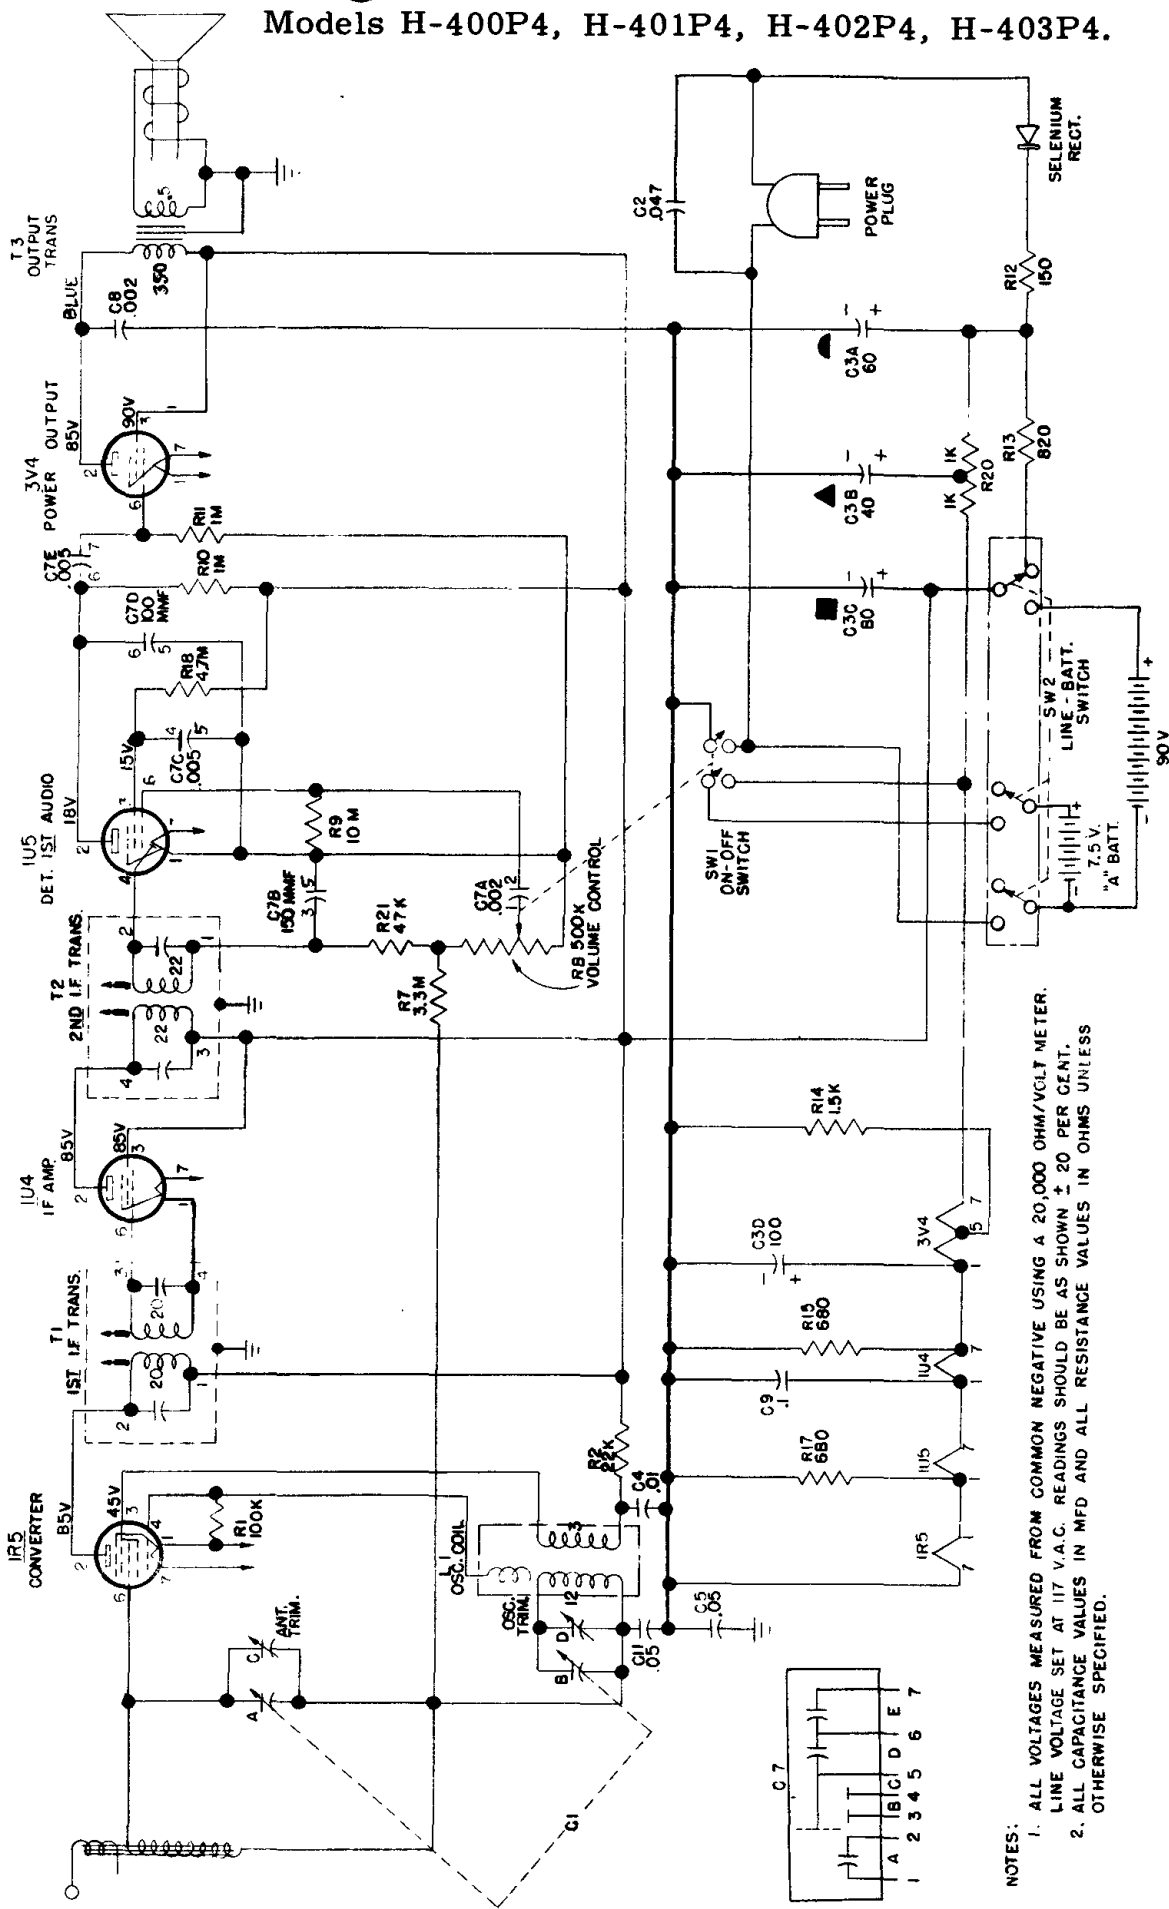

NOTES:
1. ALL VOLTAGES MEASURED FROM COMMON NEGATIVE USING A 20,000 OHM/VOLT METER. LINE VOLTAGE SET AT 117 V.A.C. READINGS SHOULD BE AS SHOWN \pm 20 PER CENT.
2. ALL CAPACITANCE VALUES IN MFD AND ALL RESISTANCE VALUES IN OHMS UNLESS OTHERWISE SPECIFIED.

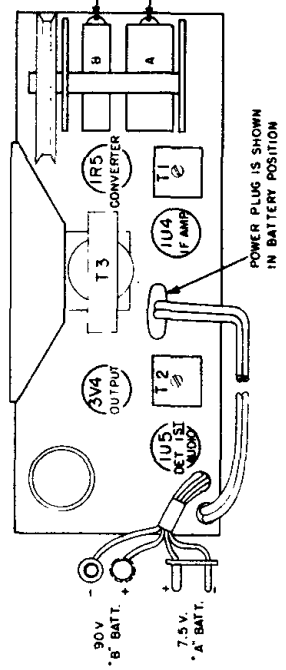

CHASSIS LAYOUT

Connect Signal Generator to —	Signal Generator Frequency	Radio Dial	Adjust for Maximum Output —
Stator of R-F tuning capacitor (A) through a 0.1 mfd	455 kc.	minimum capacity	Top and bottom slugs in 2nd and 1st I-F trans. in order given
Same as step 1	1625 kc.	minimum capacity	Osc. trimmer (D)
Radiated Signal	1400 kc.	1400 kc.	Ant. trimmer (C)