
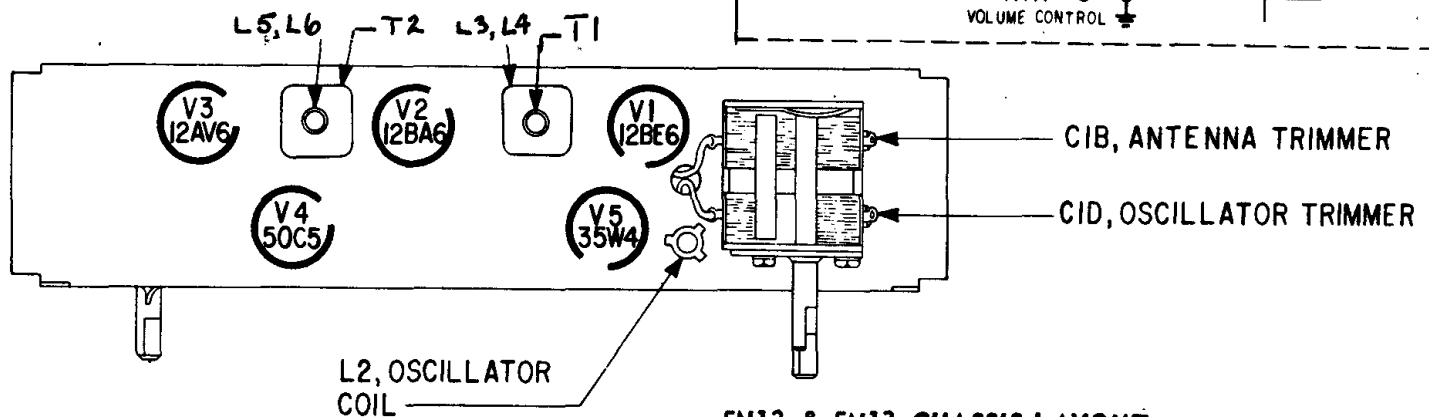


ZENITH RADIO CORPORATION

MODELS N509C, F & W CHASSIS 5N13 AND N512A, H & J CHASSIS 5N12

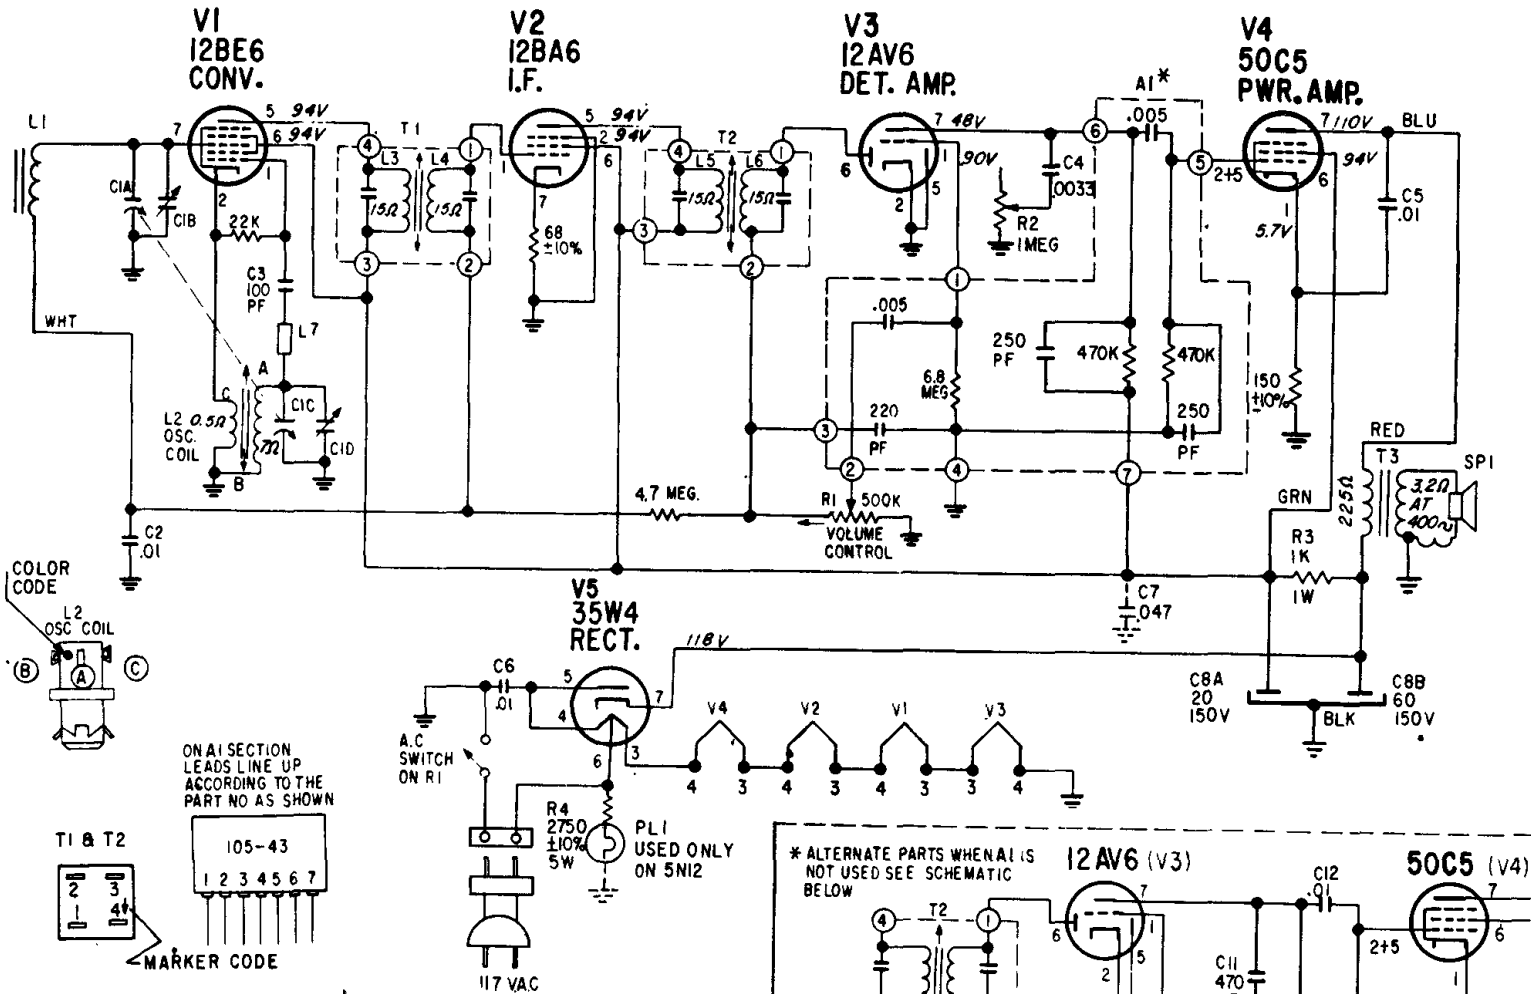

ALIGNMENT PROCEDURE

OPERATION	CONNECT OSCILLATOR TO	DUMMY ANTENNA	INPUT SIG. FREQUENCY	SET DIAL AT	TRIMMERS	PURPOSE
1	Converter Grid	.5 Mfd.	455 Kc.	600-Kc.	L3,L4,L5,L6	Align I.F. for max. output.
2	One Turn Loop Coupled Loosely to Wave magnet	-	1600 Kc.	1600 Kc.	C1D	Set Osc. to Dial Scale.
3		-	1400 Kc.	1400 Kc.	C1B	Align Antenna Stage.