

I.F. 455 KC.

CHANGEOVER SWITCH
SHOWN IN POSITION FOR
A.C. OPERATION

117Z6G
RECT.

END VIEW

RED A+

BLUE B+

YELLOW B-


D.P.S.T. SW. ON V.C.

Model 5G603

Chassis No. 5B07

Zenith Radio

All voltages measured from point
indicated to Neg. B. using 20000 ohm
per volt meter.

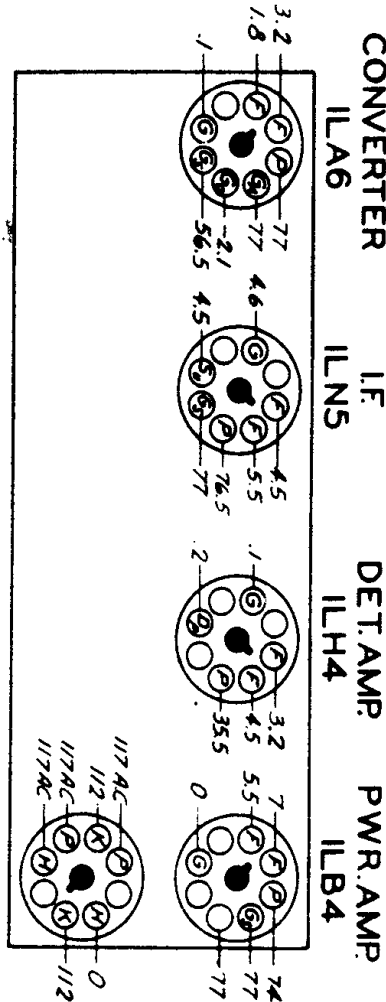

NO VOLT. AC-BATTERY PACK
UNIVERSAL PORTABLE
I.F. FREQUENCY 455 KC.
5 TUBE SUPERHETERODYNE

DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
C1	22-1062	TWO GANG VARIABLE	R1	63-773	180 M OHM	1	5B742	WAVE MAGNET ASSEMBLY
C2	22-829	.05 MFD.	R2	63-646	33 M OHM	2	5B750	OSC. COIL ASSEMBLY
C3	22-827	.1 MFD.	R3	63-713	47 M OHM	3	95-720	1ST I.F. TRANSFORMER
C4	22-162	.0001 MFD.	R4	63-600	2.2 MEG OHM	4	95-721	2ND I.F. TRANSFORMER
C5	22-492	.002 MFD.	R5	63-1126	VOLUME CONTROL	5	85-242	CHANGEOVER SWITCH
C6	22-470	.00015 MFD.	R6	63-976	15 MEG OHM			
C7	22-243	.01 MFD.	R7	63-1097	870 OHM WIREWOUND			
C8	22-326	.003 MFD.	R8	63-271	1 MEG OHM			
C9	22-869	.05 MFD.	R9	63-1137	2-SECTION CANDORM			
C10	22-1026	20 MFD. ELECTROLYTIC	R10	63-1096	140 OHM WIREWOUND	A		1ST I.F. TRANS. PRI.
C11		10 MFD. ELECTROLYTIC	R11	63-439	2700 OHM	B		1ST I.F. TRANS. SEC.
C12		10 MFD. ELECTROLYTIC	R12	63-1099	33 OHM WIREWOUND	C		2ND I.F. TRANS. PRI.
C13	22-1027	20 MFD. ELECTROLYTIC	R13	63-742	180 OHM	D		2ND I.F. TRANS. SEC.
			R14	63-296	220 M OHM	E		BROADCAST OSC. (ON GANG)
						F		BROADCAST ANT. (ON GANG)
						G		