

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (Approx.)	
Horizontal	99 Degrees
Diagonal	110 Degrees
Vertical	82 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Bonded Shield
(Gray Filter Glass Safety Plate Laminated Directly to Face of Tube)	
Light Transmittance of Faceplate Assembly (Approx.)	40 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts	
Heater Current	$0.60 \pm 5\%$ Ampere	
Heater Warm-up Time ¹	11 Seconds	
Direct Interelectrode Capacitances (Approx.)		
Cathode to All Other Electrodes	5 μmf	
Grid No. 1 to All Other Electrodes	6 μmf	
External Conductive Coating to Anode ²	2500 μmf	Max.
	1700 μmf	Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	
Height	15 $\frac{1}{4}$ Inches
Width	19 $\frac{5}{16}$ Inches
Diagonal	22 $\frac{5}{16}$ Inches
Area	282 Sq. Inches
Neck Length	5 $\frac{1}{8}$ Inches
Overall Length	15 $\frac{3}{16}$ Inches
Bulb	J187A or Equivalent
Safety Plate	FP198A or Equivalent
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base	B7-219
Basing	8KP
Weight (Approx.)	32 $\frac{1}{2}$ Pounds

RATINGS



MAXIMUM RATINGS (Design Maximum Values)

Cathode Drive Service³

Maximum Anode Voltage	22,000 Volts	dc
Minimum Anode Voltage	13,200 Volts	dc
Grid No. 3 Voltage (Focusing Electrode)	-550 to +1100 Volts	dc
Grid No. 2 Voltage	70 Volts	dc
Cathode Voltage		
Positive Bias Value	154 Volts	dc
Positive Peak Value	220 Volts	
Negative Bias Value	0 Volts	dc
Negative Peak Value	2 Volts	

QUICK REFERENCE DATA

Television Picture Tube
 23" Direct Viewed
 Rectangular Glass Type
 Spherical Faceplate
 Bonded Shield
 Gray Filter Glass
 Aluminized Screen
 Neck Length 5 $\frac{1}{8}$ "
 Electrostatic Focus
 110° Magnetic Deflection
 No Ion Trap
 External Conductive Coating

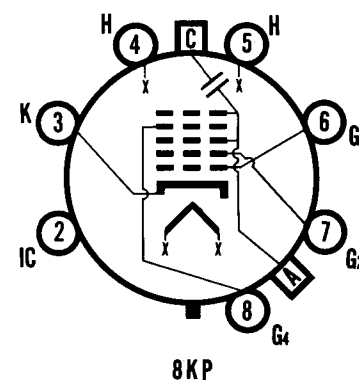

SYLVANIA ELECTRONIC TUBES

A Division of
Sylvania Electric Products Inc.

PICTURE TUBE OPERATIONS SENECA FALLS, NEW YORK

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA

JULY, 1960

PAGE 1 OF 3

File Under
TELEVISION PICTURE TUBES

MAXIMUM RATINGS (Design Maximum Values) Cathode Drive Service³ (Cont'd.)

Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period	
not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

TYPICAL OPERATING CONDITIONS (Cathode Drive Service)³

Anode Voltage	16,000 Volts	dc
Grid No. 3 Voltage for Focus	0 to +400 Volts	dc
Grid No. 2 Voltage ³	50 Volts	dc
Cathode Voltage Required for Cutoff ⁴	+32 to +47 Volts	dc

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
---	------------------


NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
2. External conductive coating must be grounded.
3. Voltages are positive with respect to Grid No. 1 unless indicated otherwise.
4. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more positive.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

OUTLINE

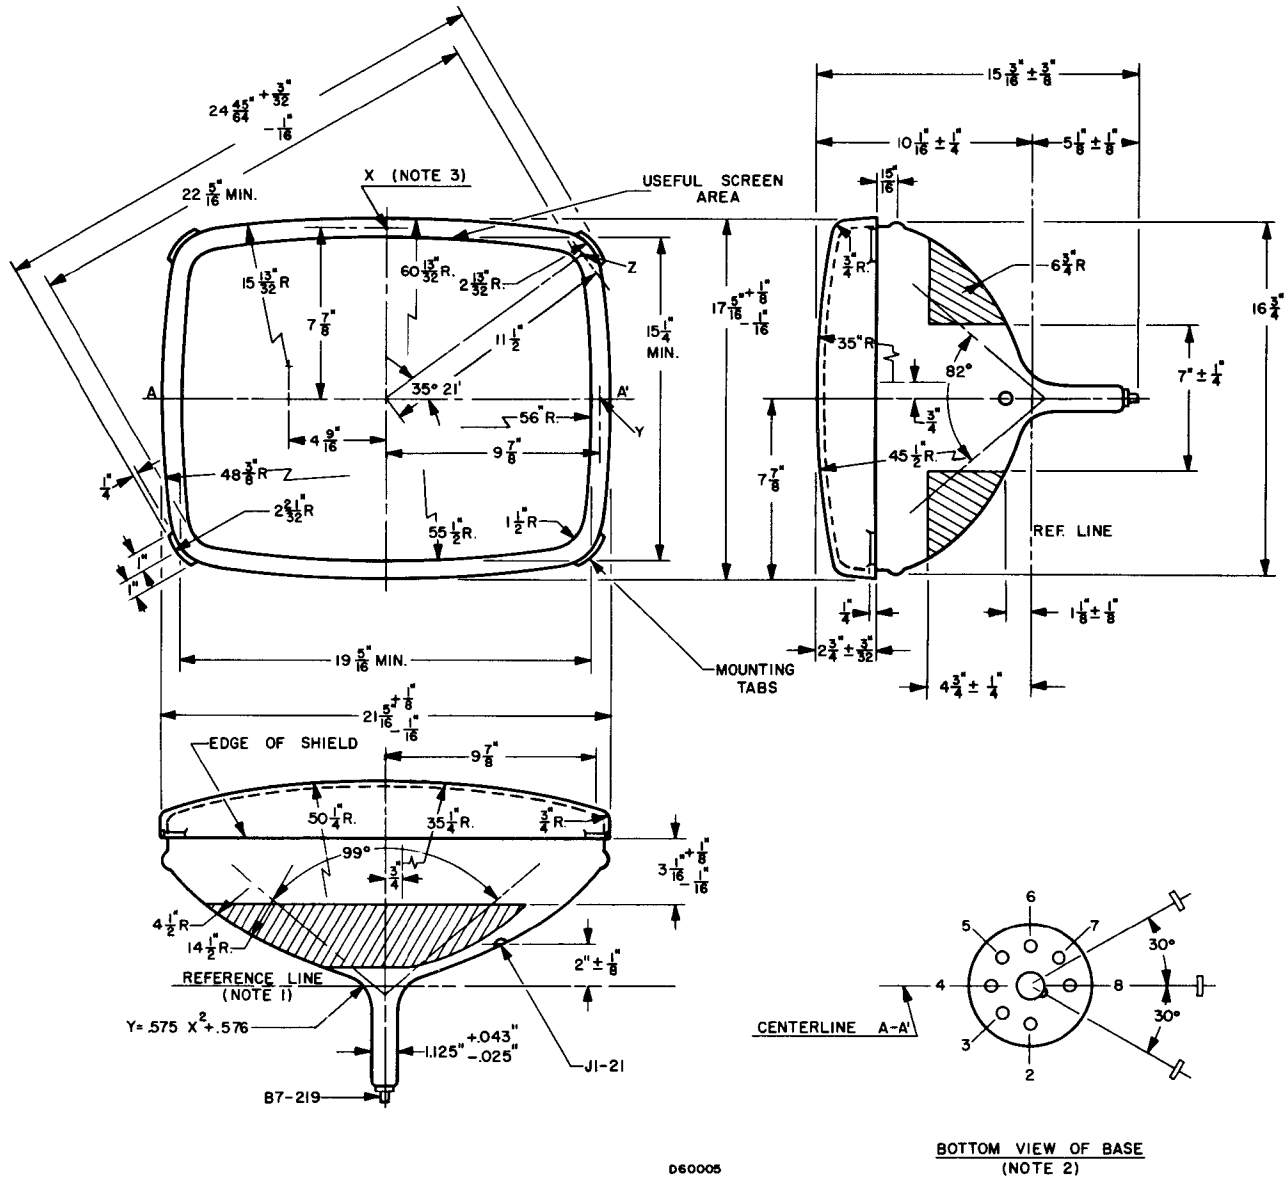

060005

DIAGRAM NOTES:

1. Reference line is determined by plane C-C' of JEDEC No. 126 Reference Line Gauge, when the gauge is seated against the bulb.
2. Base Pin No. 8 aligns with horizontal centerline (A-A') within 30° and is on same side as anode contact, J1-21.
3. Planes perpendicular to the axis and passing through points X, Y and Z are located as follows:

Plane tangent to crown of face, to plane of X = 0.758" Nom.

Plane of X to plane of Y = $0.463" \pm .030$

Plane of X to plane of Z = $0.970" \pm .030$