


DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION
C1	22-1006	TWO-GANG VARIABLE	R2	63-591	22M OHM	3	58356	OSC. COIL ASSEMBLY
C2	22-829	.05 MFD.	R3	63-1093	15 MEGOHM	4	95-696	1ST I.F. TRANS.
C3	22-162	.0001 MFD.	R4	63-600	2.2 MEGOHM	5	95-697	2ND I.F. TRANS.
C4	22-243	.01 MFD.	R5	63-1112	VOLUME CONTROL	6	100-67	PILOT LIGHT 63K .15A.
C5	22-854	.0005 MFD.	R6	63-597	470M OHM	7	95-713	FILTER CHOKE (300Ω RES.)
C6	22-1049	.03 MFD.	R7	63-686	150 OHM WIREWOUND	A		1ST I.F. TRANS. PRI.
C7	22-1014	20 MFD. ELECTROLYTIC	R8	63-1023	22 OHM WIREWOUND	B		1ST I.F. TRANS. SEC.
C8	22-1014	20 MFD. ELECTROLYTIC	R9	63-713	47M OHM	C		2ND I.F. TRANS. PRI.
C9	22-1017	.05 MFD.				D		2ND I.F. TRANS. SEC.
R1	63-589	10M OHM	1		WAVEMAGNET ASSEMBLY	E		WAVE TRAP
			2	58326	WAVE TRAP COIL ASSEMBLY	F		BROADCAST OSC.(ON GANG)
						G		BROADCAST ANT. (ON GANG)

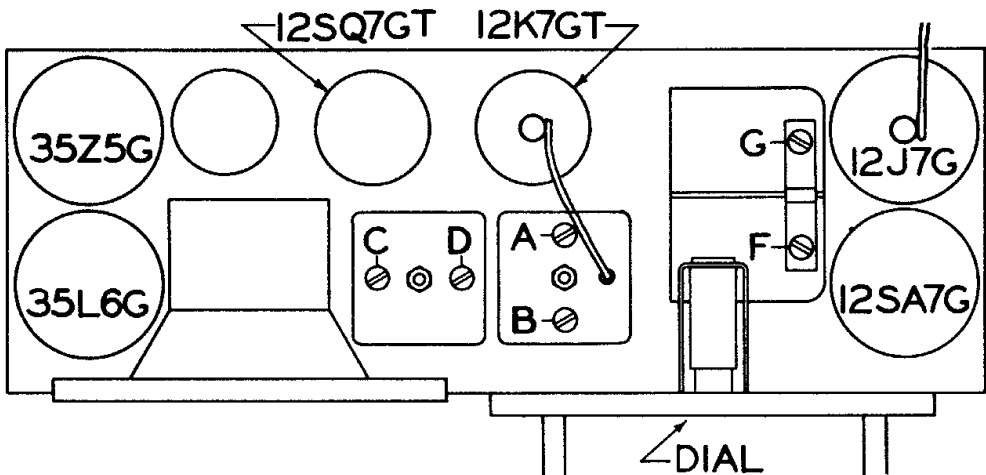

All voltages measured with a 20 M. ohm per volt meter from chassis to socket contact indicated.

I.F. FREQUENCY 455 KC.  
6 TUBE SUPERHETERODYNE  
CHASSIS N° 6A01 & N° 6A10 A.C.-D.C.  
ZENITH RADIO CORPORATION