



Operation	Connect Oscillator to	Dummy Antenna	Input Signal Frequency	Band	Set Dial At	Trimmers
1	Converter Grid	.5 mid.	455 Kc.	BC	600 Kc.	A, B, C, D
2	1 turn loop made from generator or Radex Loop	—	1600 Kc.	BC	1600 Kc.	F
3		—	1400 Kc.	BC	1400 Kc.	H, G

Models 6D615-6D615W- 6D623-6D630

Chassis No. 6B05

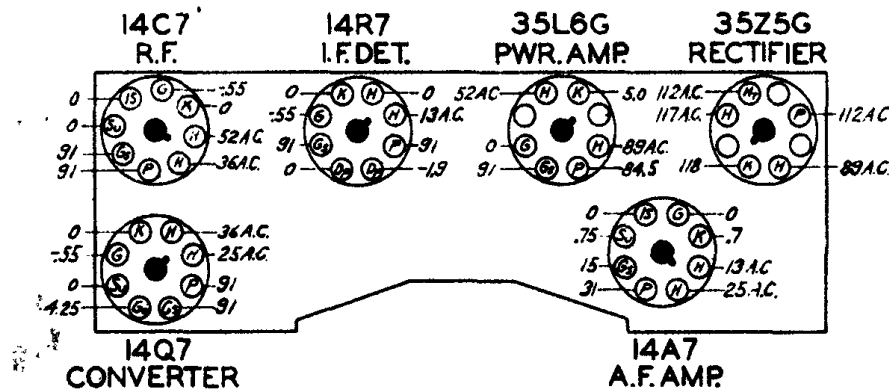

DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
C1	22-1201	THREE-BAND VARIABLE	R1	63-590	15M OHM
C2	22-829	.05 MFD.	R2	63-579	220 OHM
C3	22-827	.1 MFD.	R3	63-889	10M OHM
C4	22-1017	.05 MFD.	R4	63-1093	15 MEGOHM
C5	22-1207	.07 MFD.	R5	63-722	2.2 MEGOHM
C6	22-326	.005 MFD.	R6	63-325	150M OHM
C7	22-327	.02 MFD.	R7	63-1233	VOLUME CONTROL
C8	22-243	.01 MFD.	R8	63-591	22M OHM
C9	22-829	.0005 MFD.	R9	63-634	820 OHM
C10	22-867	.001 MFD.	R10	63-659	470M OHM
C11	22-1219	.04 MFD.	R11	63-260	100M OHM
C12	22-100	.02 MFD.	R12	63-597	470M OHM
C13	22-1127	.02 MFD.	R13	63-439	2700 OHM
C14	22-1014	20 MFD. ELECTROLYTIC	R14	63-630	6800 OHM
C15		20 MFD. ELECTROLYTIC	R15	63-1237	150 OHM WIREWOUND
			R16	63-680	5.2 MEGOHM

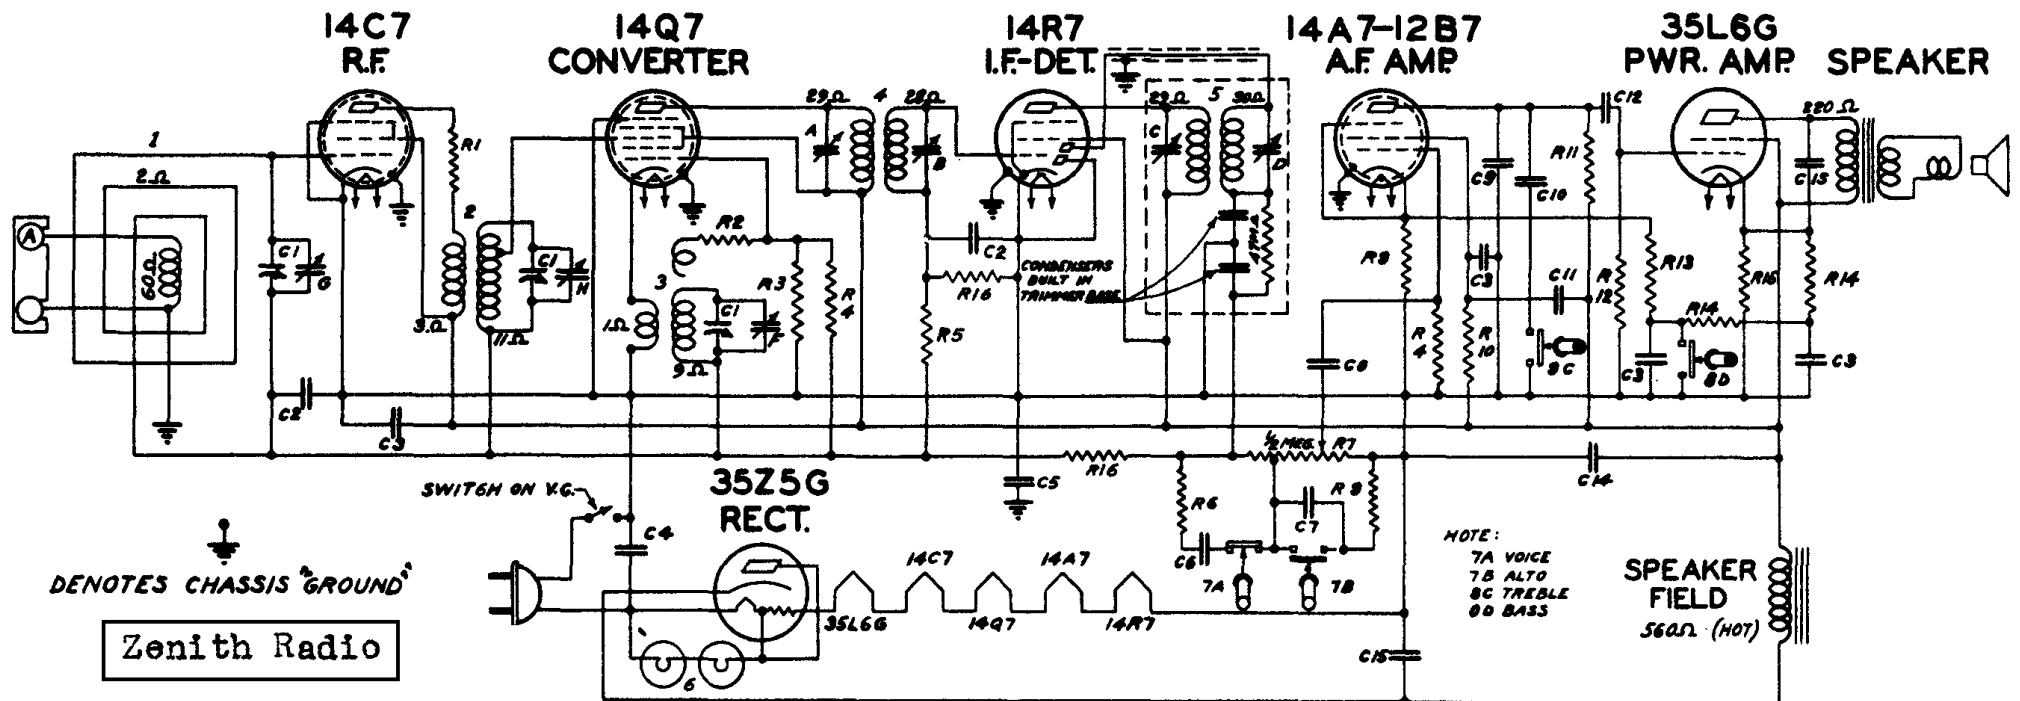

⏏ DENOTES CHASSIS GROUND

Zenith Radio