



1. F. FREQUENCY 455KC  
6 TUBE SUPERHETERODYNE  
VOLTAGE DOUBLER A.C.  
CHASSIS No. 5662 & 5666  
ZENITH RADIO CORPORATION  
CHICAGO, ILL.

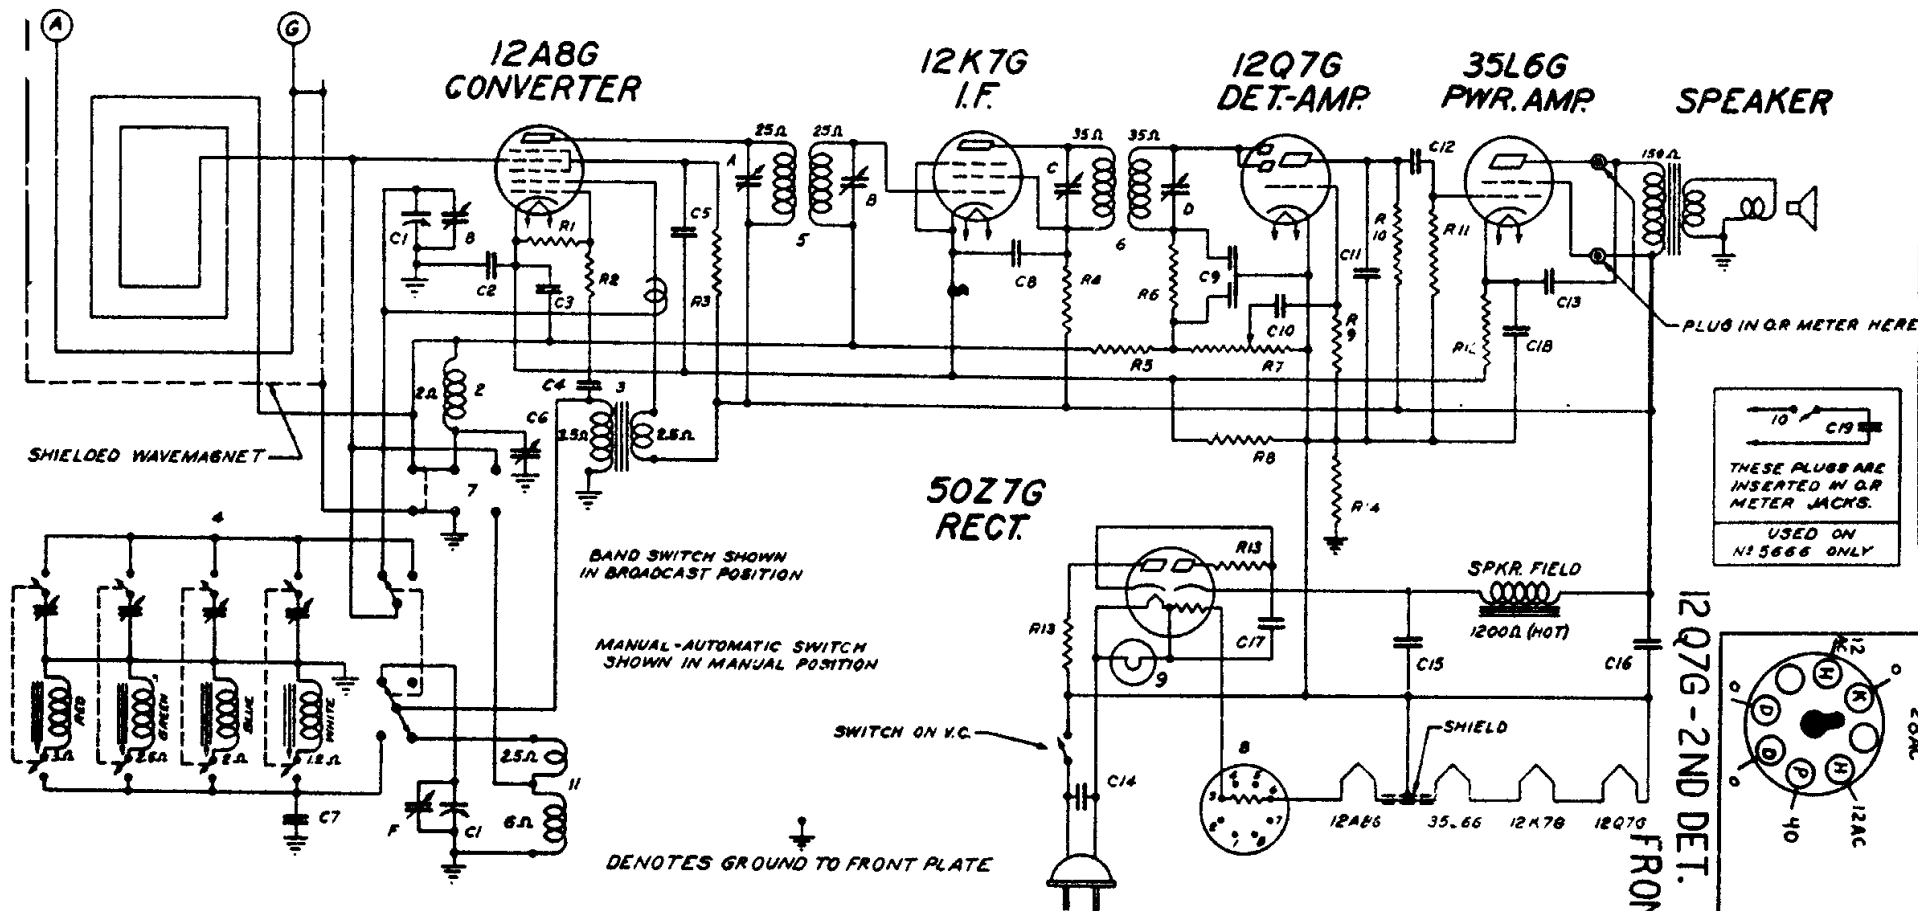

PLUG IN OR METER HERE

THESE PLUGS ARE  
INSERTED IN OR  
METER JACKS.  
USED ON  
No. 5666 ONLY

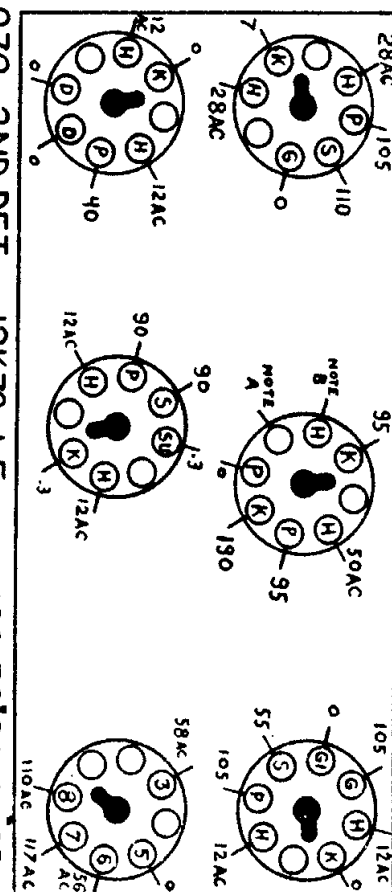

DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION		
C1	22-845	TWO-GANG VARIABLE	C15		20 MFD ELECTROLYTIC	350V	R9	63-976	15 MEGOHM	1/2 W	9	100-39	PILOT LIGHT 29 V. .17A.
C2	22-190	.1 MFD.	C16	22-840	20 " "	250V	R10	63-296	220 M OHM	1/2 W	10	MS-517	TONE CONTROL SWITCH
C3	22-250	.05 MFD	C17		20 " "	200V	R11	63-597	470 M OHM	1/2 W	11	5-7006	OSCILLATOR COIL ASSEMBLY
C4		100 MMFD.	C18		20 " "	25V	R12	63-686	150 OHM WIREWOUND	1/2 W			
C5	22-842	.02 MFD	C19	22-948	TONE CONTROL COND		R13	63-1023	22 OHM WIREWOUND	1/2 W			
C6	22-877	TRIMMER CONDENSER					R14	63-717	220 M OHM	1/2 W			
C7	22-868	COMPENSATING COND.											
C8	22-212	.05 MFD.											
C9		DUAL 100 MMFD.	R1	63-712	33 M OHM	1/2 W	1		WAVEMAGNET ASSEMBLY		A		12 I.F. TRANS. PRI
C10	22-838	.005 MFD	R2	63-581	470 OHM	1/2 W	2	37004	ANTENNA SHUNT COIL ASSEMBLY		B		12 I.F. SEC
C11	22-833	.0005 MFD.	R3	63-591	22 M OHM	1/2 W	3	56942	OSC. COUPLER COIL ASSEMBLY		C		2nd I.F. PRI
C12	22-837	.01 MFD.	R4	63-583	1000 OHM	1/2 W	4	57024	AUTOMATIC TUNING UNIT ASSEMBLY		D		2nd I.F. SEC
C13	22-836	.03 MFD.	R5	63-722	22 MEGOHM	1/2 W	5	56915	12 I.F. TRANS. ASSEMBLY		F		BROADCAST OSC. (ON GANG)
C14	22-875	15 MFD	R6	63-593	47 M OHM	1/2 W	6	95-598	2nd I.F. TRANSFORMER		G		ANTENNA BROADCAST (-)
			R7	63-1028	VOLUME CONTROL		7	MS-515	BAND SWITCH				
			R8	63-572	15 OHM	1/2 W	8	100-79	BALLAST TUBE				

Models 6P418, 6P419, 6P456 6P429, 6P430, 6P447, 6P448, 6P457

CHASSIS No. 5662