


TUNG-SOL

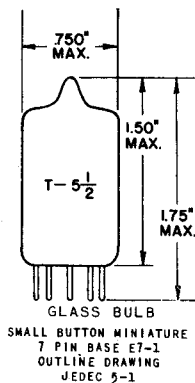

DOUBLE DIODE

MINIATURE TYPE


COATED UNIPOTENTIAL CATHODE

HEATER

6.3 VOLTS 300 MA.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

BASING DIAGRAM
JEDEC 68T

THE 5726 IS A MINIATURE DOUBLE DIODE PARTICULARLY DESIGNED FOR DEPENDABLE OPERATION UNDER CONDITIONS USUALLY FOUND IN MOBILE AND AIRCRAFT APPLICATIONS. THE HEATERS ARE DESIGNED TO MINIMIZE THE POSSIBILITY OF FAILURE UNDER SEVERE INTERMITTENT ON-OFF OPERATION. THE HEATERS FOR THE TWO DIODE UNITS ARE INTERNALLY CONNECTED IN SERIES SO THAT A HEATER FAILURE MAKES BOTH UNITS UNOPERATIVE. IT IS DESIGNED TO PASS THE SHOCK AND FATIGUE TEST REQUIREMENTS OF THE JAN TYPE 6AL5W.

DIRECT INTERELECTRODE CAPACITANCES

PLATE OF UNIT #1 TO CATHODE OF UNIT #1 ^A	3.2	pf
PLATE OF UNIT #2 TO CATHODE OF UNIT #2 ^A	3.2	pf
CATHODE OF UNIT #1 TO PLATE OF UNIT #1 ^B	3.9	pf
CATHODE OF UNIT #2 TO PLATE OF UNIT #2 ^B	3.9	pf
PLATE OF UNIT #1 TO PLATE OF UNIT #2 (MAX.) ^C	0.026	pf

^A WITH JETEC SHIELD #313 CONNECTED TO HEATER, INTERNAL SHIELD AND CATHODE OF UNIT UNDER TEST.

^B WITH JETEC SHIELD #313 CONNECTED TO HEATER, INTERNAL SHIELD AND PLATE OF UNIT UNDER TEST.

^C WITH JETEC SHIELD #313 CONNECTED TO GROUND.

RATINGS

DESIGN CENTER VALUES - SEE EIA STANDARD RS-239

MAXIMUM DC HEATER-CATHODE VOLTAGE	330	VOLTS
MAXIMUM PEAK INVERSE PLATE VOLTAGE	330	VOLTS
MAXIMUM PEAK PLATE CURRENT (PER PLATE)	54	MA.
MAXIMUM DC OUTPUT CURRENT (PER PLATE)	9	MA.



TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

HALF-WAVE RECTIFIER

IN HALF-WAVE SERVICE THE TWO UNITS CAN BE USED SEPARATELY OR IN PARALLEL

AC PLATE VOLTAGE (PER PLATE) RMS	117	VOLTS
MINIMUM TOTAL EFFECTIVE PLATE SUPPLY IMPEDANCE (PER PLATE)	300	OHMS
DC OUTPUT CURRENT (PER PLATE)	9	MA.
HEATER CYCLES OF INTERMITTENT OPERATION (MIN.) ^C	5 000	CYCLES

^C THE 5726 HAS A HEATER WHICH IS DESIGNED TO WITHSTAND AT LEAST 3000 CYCLES OF INTERMITTENT OPERATION AT 7.5 VOLTS.

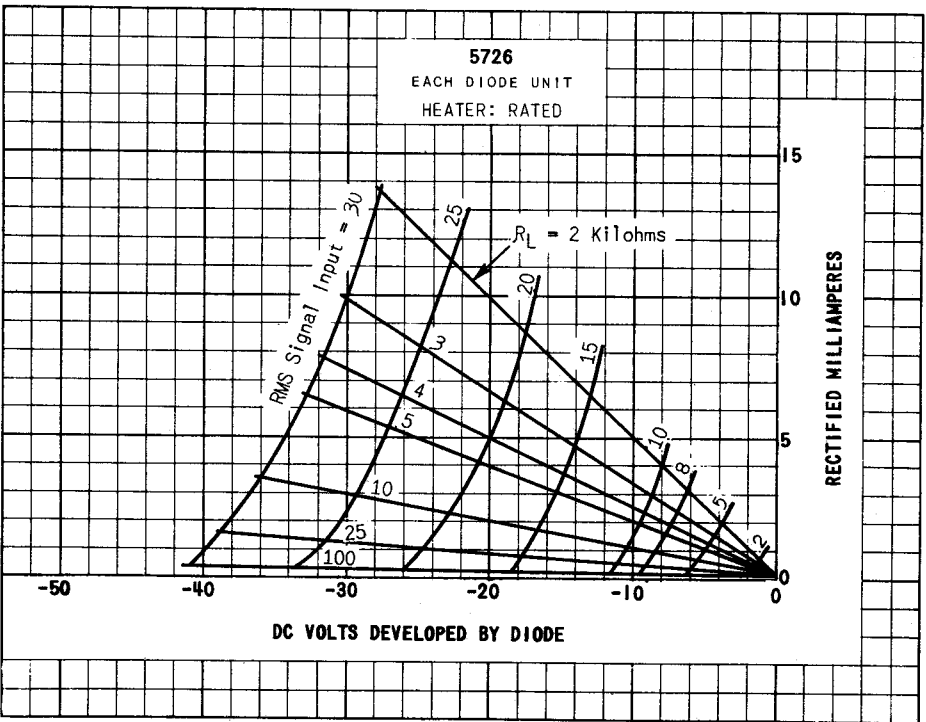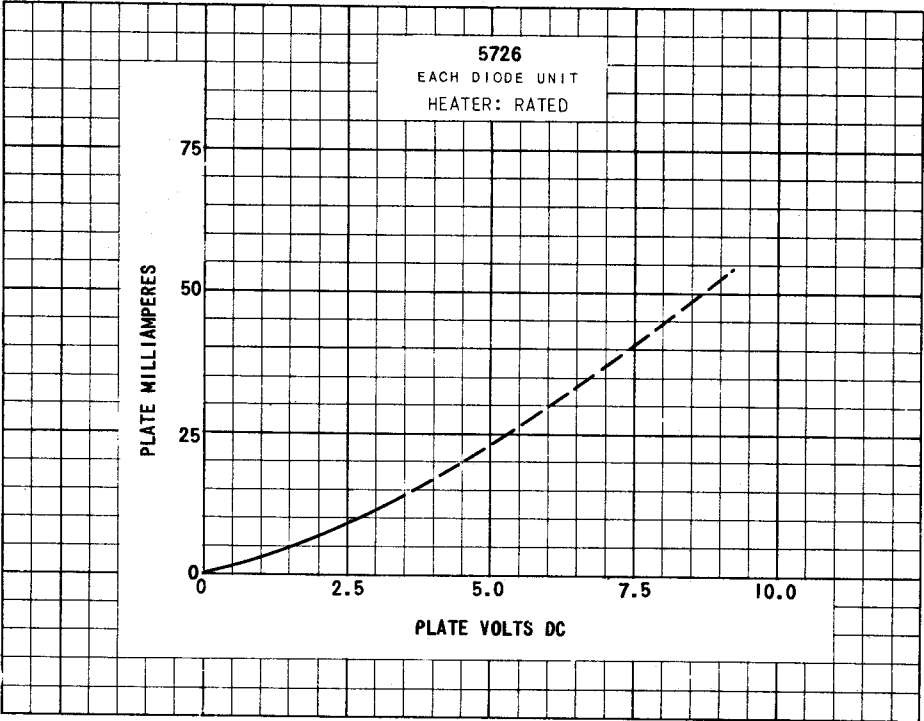

TUNG-SOL

TWIN DIODE

MINIATURE TYPE


COATED UNIPOTENTIAL CATHODE

HEATER


6.3 VOLTS 0.30 AMP

AC OR DC

ANY MOUNTING POSITION



GLASS BULB



BOTTOM VIEW

MINIATURE BUTT
7 PIN BASE

68T

THE 5726/6AL5W/6097 IS A RUGGEDIZED TWIN DIODE OF THE SEVEN PIN MINIATURE CONSTRUCTION. A SHIELD BETWEEN THE TWO DIODE SECTIONS IS BROUGHT OUT TO A SEPARATE BASE PIN, SO THAT ELECTRICALLY INDEPENDENT OPERATION WILL BE ASSURED. THIS IS USEFUL FOR GENERAL PURPOSE APPLICATIONS SUCH AS CLIPPER AND CLAMPER CIRCUITS, WHERE THE TWO SECTIONS MAY BE USED IN DIFFERENT PARTS OF THE OVERALL CIRCUITRY. ITS HIGH PERVEANCE PERMITS HIGH EFFICIENCY IN EITHER FM OR AM SERVICE, IN RATIO DETECTOR OR PHASE DISCRIMINATOR CIRCUITS. SINCE IT MUST BE ABLE TO WITHSTAND SEVERE MECHANICAL TESTS TO MEET TEST SPECIFICATIONS, THE 5726/6AL5W/6097 IS ESPECIALLY SUITED FOR USE IN INDUSTRIAL AND MILITARY AIRBORNE EQUIPMENT WHICH MAY BE SUBJECTED TO SEVERE SHOCK AND VIBRATION.

DIRECT INTERELECTRODE CAPACITANCES

	WITHOUT SHIELD	WITH SHIELD #316	
MAXIMUM PLATE #1 TO PLATE #2 (RATED)	.068	.026	μμf
PLATE TO (h+k+ist+es) (RATED)	2.5	3.2	μμf
MAXIMUM	---	4.0	μμf
MINIMUM	---	2.4	μμf
CATHODE TO (h+k+ist+es) (RATED)	3.9*	3.9	μμf
MAXIMUM	---	4.7	μμf
MINIMUM	---	3.1	μμf

*
NOMINAL VALUE.

RATINGS

ABSOLUTE MAXIMUM VALUES

HEATER VOLTAGE	6.3 ± 10%	VOLTS
MAXIMUM PEAK INVERSE PLATE VOLTAGE	360	VOLTS
MAXIMUM PEAK DC PLATE CURRENT (EACH SECTION) ^A	60	mA
MAXIMUM DC OUTPUT CURRENT (EACH SECTION)	10	mA
MAXIMUM SURGE CURRENT (EACH SECTION)	350	mA
MAXIMUM HEATER CATHODE VOLTAGE	360	VOLTS
MAXIMUM BULB TEMPERATURE	165	°C

TYPICAL OPERATING CONDITIONS

HALF-WAVE RECTIFIER^B

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.30	AMP.
AC PLATE VOLTAGE, PER PLATE (RMS)	117	VOLTS
MINIMUM TOTAL EFFECTIVE PLATE SUPPLY IMPEDANCE, PER PLATE	300	OHMS
DC OUTPUT CURRENT, PER PLATE	9	mA
HEATER CYCLES OF INTERMITTENT OPERATION, MINIMUM	5000	CYCLES

CONTINUED ON FOLLOWING PAGE

CONTINUED FROM PRECEDING PAGE

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

 $E_f = 6.3V$, $E_{pp}/p = 165V_{ac}$, $R_i = 11,000 \text{ OHMS}$, $C_i = 84f$

EXCEPT AS MODIFIED BELOW

	INITIAL				500 HOUR LIFE TEST			
	INDIVIDUAL MIN.	MAX.	PROD. MIN.	AVG. MAX.	INDIVIDUAL MIN.	MAX.		
HEATER CURRENT	275	325	---	---	275	325		mA
HEATER-CATHODE LEAKAGE ($E_{hk} = \pm 100 V_{dc}$)	---	± 5	---	---	---	± 10		μA_{dc}
GRID EMISSION (1) ($E_b = 10 V_{dc}$)	40	---	---	---	35	---		$m A_{dc}$
GRID EMISSION (2) ^{CD} ($E_b = 7V_{ac}$)	---	15	---	---	---	15		PERCENT
OPERATION ^{EF}	16	---	---	---	---	---		$m A_{dc}$
PLATE CURRENT ($E_{bb}=0$, $R_p=40,000$)	2	20	---	---	2	20		μA_{dc}
PLATE CURRENT DIFFERENCE BETWEEN DIODES	---	5	---	---	---	---		μA_{dc}
INSULATION OF ELECTRODES ^G ($E_f=6.3V$, $E(p-all)=300V_{dc}$, p NEGATIVE, $E(sd-all)=300V_{dc}$, sd NEGATIVE)								
$R(p-all)$	100	---	---	---	50	---		MEGOHMS
$R(sd-all)$	100	---	---	---	50	---		MEGOHMS

SPECIAL REQUIREMENTS

	MIN.	MAX.	
VARIABLE FREQUENCY VIBRATION ^H (NO VOLTAGES)	---	---	
VIBRATIONAL FATIGUE ^J	---	---	
SHOCK ^K (HAMMER ANGLE = 48° , $E_{pp}/p=0$)	---	---	
POST SHOCK AND VIBRATIONAL FATIGUE TEST END POINTS			
HEATER CATHODE LEAKAGE	---	± 15	μA_{dc}
OPERATION	14	---	$m A_{dc}$
GLASS STRAIN ^L	---	---	
CONTINUITY AND SHORT ^M	---	---	
LOW PRESSURE VOLTAGE BREAKDOWN ^N (PRESSURE= 55 ± 5 mm MERCURY, TEMP. = $25 \pm 5^\circ C$, HUMIDITY=0, VOLTAGE= $500V_{ac}$, 60 CYCLES, SINUSOIDAL WAVEFORM)	500	---	V_{ac}
HUM ^P ($E_f = 7.0V$)	---	10	$m V_{ac}$
1 HOUR STABILITY LIFE TEST	---	---	
INTERMITTENT LIFE TEST CONDITIONS	---	---	
STABILITY LIFE TEST END POINTS	---	10	PERCENT
EMISSION ^Q	---	---	
100 HOUR SURVIVAL RATE LIFE TEST	---	---	
INTERMITTENT LIFE TEST CONDITIONS OR EQUIVALENT	---	---	
HEATER CYCLING LIFE TEST ^R ($E_f=7.5V$, $E_{hk}=135V_{dc}$, HEATER POSITIVE, $E_{pp}=0$)	---	---	
HEATER CYCLING LIFE TEST END POINTS ^S	---	---	
HEATER-CATHODE LEAKAGE	---	± 20	μA_{dc}
INTERMITTENT LIFE TEST ^{TU} (MIN. BULB TEMP. = $+165^\circ C$)	---	---	

NOTES

^A DIFFICULTY MAY BE ENCOUNTERED IF THIS TUBE IS OPERATED FOR LONG PERIODS OF TIME WITH VERY SMALL VALUES OF CATHODE CURRENT.

^B IN HALF-WAVE SERVICE THE TWO UNITS CAN BE USED SEPARATELY OR IN PARALLEL.

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

NOTES -CONT'D.

C READINGS AT $E_b=5.7V$ ARE MADE WITH $E_b=7.0V$.
THE VALUE OF EMISSION (2) SHALL APPLY TO INDIVIDUAL TUBES AS IS EXPRESSED:

MADE WITH $E_b=7.0V$. $\frac{(1s \text{ AT } 6.3)-(1s \text{ AT } 5.7)}{(1s \text{ AT } 6.3)} \times 100$

D SEE MIL-E-1C 4.10.1.1

E SEE MIL-E-1C 4.10.13

F IN A FULL-WAVE CIRCUIT, ADJUST Z_p/p SO THAT A BOGIE TUBE GIVES $I_0=18mA_{dc}$ AND I_b NOT LESS THAN 50 MA PER PLATE. A BOGIE TUBE HAS A TUBE DROP OF $E_{td}=10V_{dc}$ AT $I_0=60mA_{dc}$ PER PLATE. $E_{hk}=E_0+11.7V_{ac}$.

G SEE MIL-E-1C 4.8.2

H SEE MIL-E-1C 4.9.20.3

J SEE MIL-E-1C 4.9.20.6

K SEE MIL-E-1C 4.9.20.5

L GLASS STRAIN CONSISTS OF COMPLETELY SUBMERGING THE TUBE INTO BOILING WATER ($97^{\circ}C-100^{\circ}C$) FOR A PERIOD OF 15 SECONDS, THEN IMMEDIATELY PLUNGING INTO COLD WATER ($0^{\circ}C \pm 3^{\circ}C$). THE AMOUNT OF WATER SHALL BE AT LEAST 2 LITERS PER FIFTEEN TUBES. TUBES FOR THIS TEST SHALL HAVE BEEN EXHAUSTED A MINIMUM OF 48 HOURS PRIOR TO PERFORMANCE OF THE TEST.

M SEE MIL-E-1C 4.7.5

N BREAKDOWN SHALL BE DEFINED AS THAT VOLTAGE AT WHICH ARCING OCCURS BETWEEN ANODE BASE PIN AND ADJACENT PINS.

P THE TEST CIRCUIT TO BE USED IS SHOWN SCHEMATICALLY IN FIGURE #1.

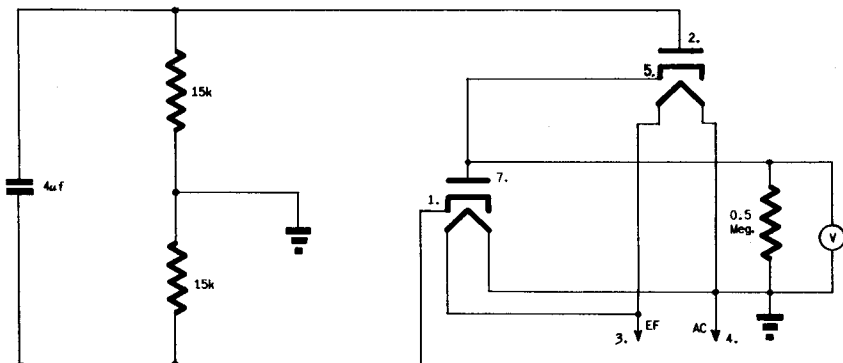


Figure 1.

Pin numbers for the element connections are indicated.

Q THE VALUE OF EMISSION SHALL BE MEASURED AT CONDITION $E_b=7.0V$ FOR INITIAL AND TERMINAL READINGS.

R SEE MIL-E-1C 4.11.7

S SEE MIL-E-1C 4.11.4

T SEE MIL-E-1C 4.11.5

U $E_{hk}=E_0+11.7V_{ac}$. IN A FULL-WAVE LIFE TEST CIRCUIT, THE VALUES SPECIFIED FOR R_L AND C_L MAY BE CONSIDERED AS APPROXIMATE AND SHALL BE ADJUSTED INITIALLY TO GIVE NOT LESS THAN $I_0 = 18 mA_{dc}$ AND $I_b = 50 MA$ WITH A BOGIE TUBE.

5726/6AL5W/6097
PREMIUM TUBE

