


## Models 6G638-6G660

Zenith Radio

Chassis No. 6B09

DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
C1	22-1217	THREE GANG VARIABLE	C20	22-243	.01 MFD.	R13	63-594	68M OHM
C2	22-1183	.01 MFD.	C21	22-227	.01 MFD.	R14	63-1259	TWO-SECTION CANNON
C3	22-327	.02 MFD.	C22	22-254	200 MFD. ELECTROLYTIC	R15	63-605	1000 OHM
C4	22-229	.05 MFD.	C23	22-1298	40 MFD.	R16	63-976	15 MEGOHM
C5	22-1047	10 MFD. ELECTROLYTIC				R17	63-580	330 OHM
C6	22-1047	20 MFD.				R18	63-1097	870 OHM WIREWOUND
C7	22-1289	30 MFD.				R19	63-597	470 M OHM
C8	22-289	50 MMFD.				R20	63-591	22M OHM
C9	22-309	5 MMFD.	P1	63-602	4.7 MEGOHM	1	59688	ANTENNA COIL ASSEMBLY
C10	22-930	DUAL PADDER	R2	63-589	10M OHM	2	59690	DETECTOR COIL
C11	22-358	.002 MFD.	R3	63-600	2.2 MEGOHM	3	59689	OSCILLATOR COIL
C12	22-1017	.05 MFD.	R4	63-654	180M OHM	4	95-821	181 I.F. TRANSFORMER
C13	22-954	.00035 MFD.	R5	63-577	100 OHM	5	95-822	220 I.F.
C14	22-470	.00015 MFD.	R6	63-593	47M OHM	6	95-292	BAND SELECTOR SWITCH
C15	22-229	.005 MFD.	R7	63-635	3300 OHM	7	59987	100 OHM
C16	22-440	.004 MFD.	R8	63-640	8200 OHM	8	59986	100 OHM
C17	22-492	.002 MFD.	R9	63-1280	140 OHM WIREWOUND	9	65-171	CHANGEDOVER SWITCH
C18	22-162	.0001 MFD.	R10	63-271	1 MEGOHM			
C19	22-287	.001 MFD.	R11	63-604	10 MEGOHM			
			R12	63-1284	VOLUME CONTROL			

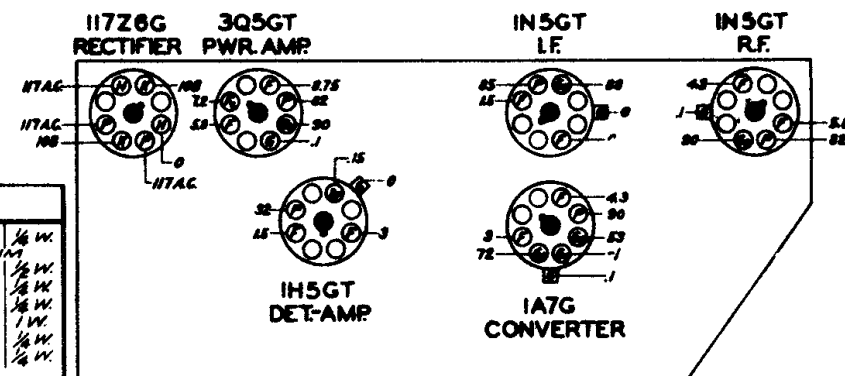

### SOCKET VOLTAGES—BOTTOM VIEW

All voltages measured with a 20,000 ohm per volt meter from chassis to socket contact indicated.