


I.F. FREQUENCY 455KC.
 8 TUBE SUPERHETERODYNE

Zenith Radio

DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION
C1	22-1218	THREE GANG VARIABLE	C21	22-1041	.005 MFD.	R17	63-648	47M OHM
C2	22-716	.0005 MFD.				R18	63-1195	470 OHM WIREWOUND
C3	22-828	.05 MFD.						
C4	22-829	.05 MFD.						
C5	22-865	COMPENSATING COND.	R1	63-600	2.2 MEGOHM	1		WAVEMAGNET ASSEMBLY
C6	22-950	DUAL PADDER	R2	63-590	15M OHM	2	59695	ANTENNA COIL
C7	22-127	25 MMF.D.	R3	63-587	4700 OHM	3	59698	DETECTOR COIL
C8	22-182	.00025 MFD.	R4	63-593	47M OHM	4	59696	OSCILLATOR COIL
C9	22-825	.1 MFD.	R5	63-649	18M OHM	5	59589	LOOP LOADING COIL
C10	22-387	.02 MFD.	R6	63-609	22M OHM	6	58326	WAVE TRAP COIL ASSEMBLY
C11	22-289	58 MMF.D.	R7	63-608	1000 OHM	7	95-826	181 I.F. TRANSFORMER
C12	22-470	.00015 MFD.	R8	63-271	1 MEGOHM	8	95-827	220 I.F.
C13	22-229	.005 MFD.	R9	63-1059	39M OHM	9	59926	AUTOMATIC TUNING ASSEM.
C14	22-492	.002 MFD.	R10	63-1075	VOLUME CONTROL	10	85-296	BAND SELECTOR SWITCH
C15	22-448	.004 MFD.	R11	63-716	68M OHM	11	59911	TO NE CONTROL
C16	22-854	.0005 MFD.	R12	63-976	15 MEGOHM	12	95-758	PWR. TRANS. 117K 50-60W
C17	22-171	.05 MFD.	R13	63-585	2200 OHM	13	100-36	DIAL LIGHT 6.3V .25A.
C18	22-827	.1 MFD.	R14	63-1100	52 OHM WIREWOUND			
C19	22-827	100 MFD. ELECTROLYTIC	R15	63-296	220M OHM			
C20	22-1108	20 MFD.	R16	63-637	330M OHM			

Models 8S647-8S661

Chassis No. 8B01

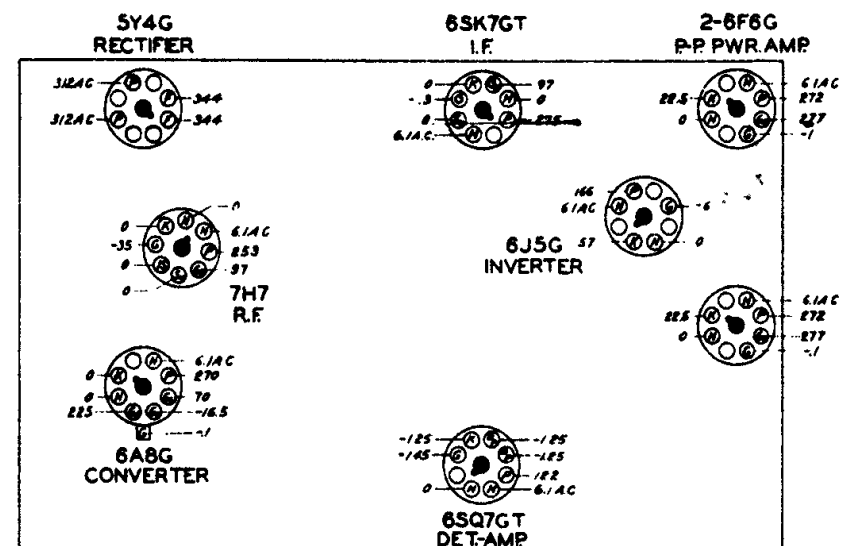

SOCKET VOLTAGES—BOTTOM VIEW