

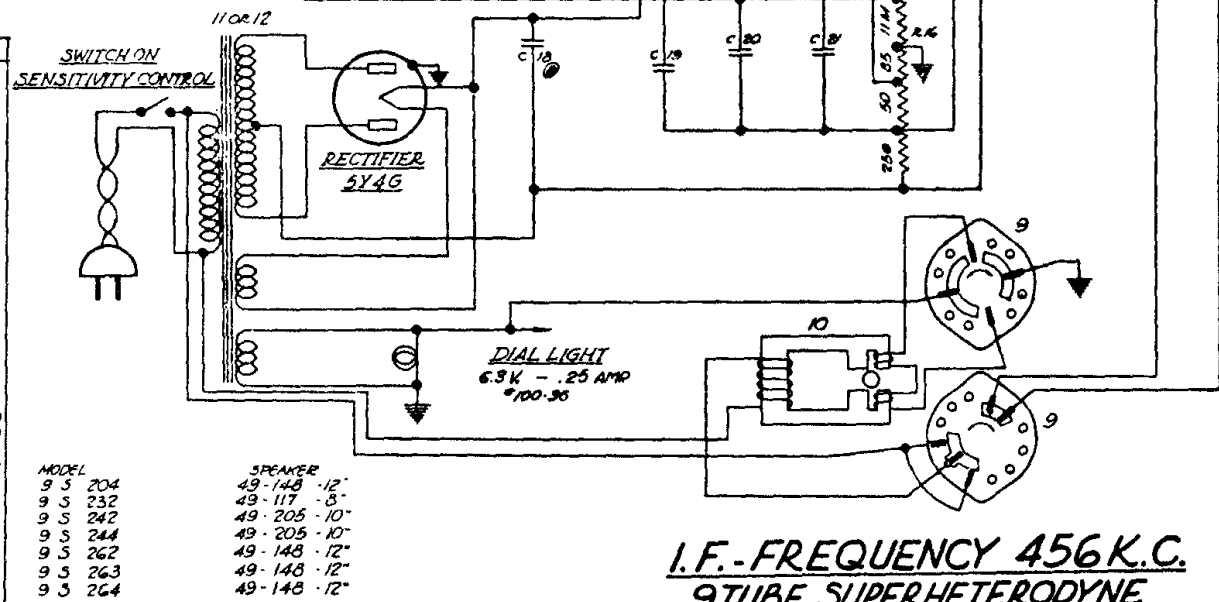
| DIAL NO. | PART NO. | DESCRIPTION                        | VALUES |
|----------|----------|------------------------------------|--------|
| 1        | 5-5017   | ANTENNA COIL & SHIELD ASSEMBLY     |        |
| 2        | 5-5018   | DETECTOR COIL & SHIELD ASSEMBLY    |        |
| 3        | 5-5019   | OSCILLATOR COIL & SHIELD ASSEMBLY  |        |
| 4        | 95-416   | 1ST I.F. TRANSFORMER               |        |
| 5        | 95-417   | 2ND I.F. TRANSFORMER               |        |
| 6        | 85-103   | BAND SELECTOR SWITCH               |        |
| 7        | 85-108   | TONE CONTROL SWITCH                |        |
| 8        | 85-109   | SENSITIVITY CONTROL SWITCH         |        |
| 9        | 85-116   | MOTOR CONTROL SWITCH               |        |
| 10       | M1-51    | MOTOR                              |        |
| 11       | 95-418   | POWER TRANSFORMER 117V 50-60 CYCLE |        |
| 12       | 95-451   | POWER TRANSFORMER-ALL VOLTAGE 250V |        |
| 13       | 20-135   | SPEAKER TRANSFORMER                |        |
| 14       |          | R.F. CHOKE                         |        |

| DIAL NO. | PART NO. | DESCRIPTION                   | VALUES |
|----------|----------|-------------------------------|--------|
| C1       | 22-548   | THREE GANG VARIABLE CONDENSER | 200 V  |
| C2       | 22-250   | .05 MFD                       | 400 V  |
| C3       | 22-170   | 1 MFD                         | 400 V  |
| C4       | 22-487   | .05 MFD                       | 400 V  |
| C5       | 22-127   | .25 MFD                       | 600 V  |
| C6       | 22-350   | .002 MFD                      | 600 V  |
| C7       | 22-550   | DUAL FIXED PADDER             |        |
| C8       | 22-212   | .05 MFD                       | 400 V  |
| C9       | 22-102   | .00025 MFD                    | 600 V  |
| C10      | 22-327   | .02 MFD                       | 200 V  |
| C11      | 22-162   | .0001 MFD                     | 600 V  |
| C12      | 22-147   | .0005 MFD                     | 600 V  |
| C13      | 22-326   | .003 MFD                      | 400 V  |
| C14      | 22-177   | .2 MFD                        | 400 V  |
| C15      | 22-440   | .004 MFD                      | 400 V  |
| C16      | 22-435   | .02 MFD                       | 600 V  |
| C17      | 22-627   | .002 MFD                      | 1000 V |
| C18      | 22-569   | 12 MFD DRY ELECTROLYTIC       | 450V   |
| C19      |          | 2 MFD                         | 450V   |
| C20      | 22-571   | .6 MFD                        | 200 V  |
| C21      |          | .6 MFD                        | 450 V  |

| R1  | 63-609 | 22 M OHMS                               | 1/2 W x 20 |
|-----|--------|---|------------|
| R2  | 63-393 | 47 M OHMS                               | 1/4 W x 20 |
| R3  | 63-535 | 100 M OHMS                              | 1/4 W x 20 |
| R4  | 63-581 | 470 OHMS                                | 1/4 W x 20 |
| R5  | 63-645 | 27 M OHMS                               | 1/4 W x 20 |
| R6  | 63-586 | 3300 OHMS                               | 1/4 W x 20 |
| R7  | 63-271 | 1 MEG OHMS                              | 1/4 W x 20 |
| R8  | 63-658 | 390 M OHMS                              | 1/4 W x 10 |
| R9  | 63-523 | 2 MEG OHM VOLUME CONTROL                |            |
| R10 | 63-608 | 15 M OHMS                               | 1 W x 20   |
| R11 | 63-296 | 220 M OHMS                              | 1/4 W x 20 |
| R12 | 63-654 | 180 M OHMS                              | 1/4 W x 10 |
| R13 | 63-597 | 470 M OHMS                              | 1/4 W x 20 |
| R14 | 63-605 | 1000 OHMS                               | 1/2 W x 20 |
| R15 | 63-680 | 10 M OHMS                               | 1 W x 20   |
| R16 | 63-570 | 5 SECTION CARBON                        |            |
| R17 |        | 1 MEG OHM MOUNTED IN TUNING TUBE SOCKET |            |



**I.F.-FREQUENCY 456 K.C.**  
**9TUBE SUPERHETERODYNE**  
**3BAND**  
**CHASSIS No 5905**

Models 9-S-203, 9-S-232, 9-S-242, 9-S-244, 9-S-262, 9-S-263, 9-S-264 (5905 Chassis)