

ZENITH RADIO CORPORATION


Model 6R481

Chassis No. 5675

NOTE

All voltages measured with a 1000 ohm per volt meter from chassis to socket contact indicated.

All voltages are positive D.C. unless marked otherwise.
Volume control on full.
Line voltage 120 A.C.

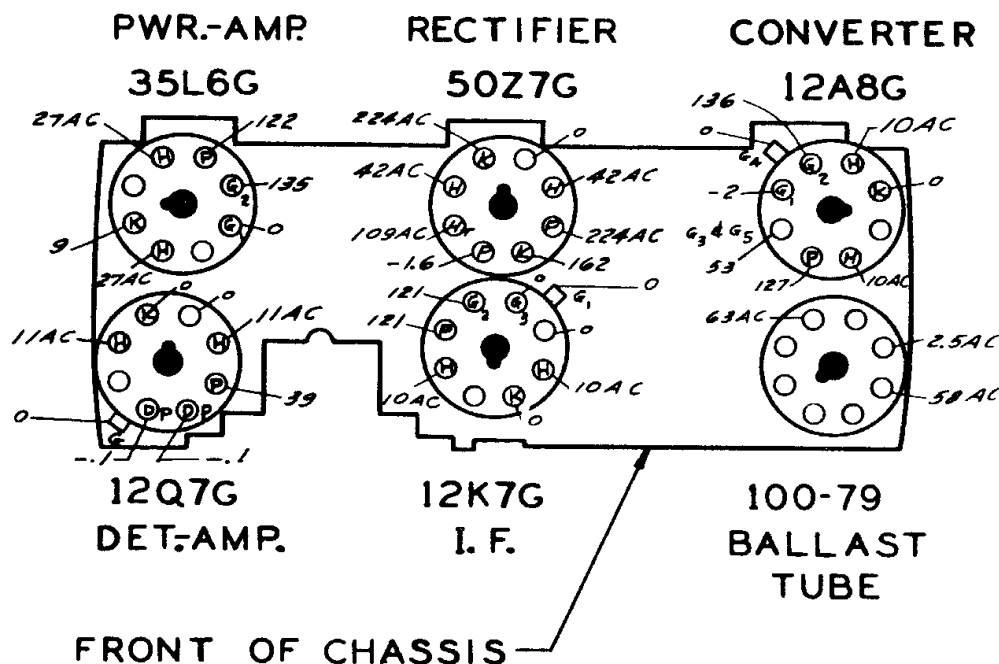

DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION
C1	22-985	TWO GANG VARIABLE	C15	22-105	01 MFD	R10	63-1023	22 OHM WIREWOUND
C2	22-988	2 MFD	C16	22-875	.15 MFD	R11	63-719	470M OHM
C3	22-250	.05 MFD	C17	22-980	0.4 MFD	R12	63-717	220M OHM
C4	22-981	100 MMFD	C18	22-212	.05 MFD	R13	63-503	1000 OHM
C5	22-984	.02 MFD						
C6	22-937	DUAL 100 MMFD	R1	63-713	47 M OHM	1		WAVE MAGNET ASSEMBLY
C7	22-933	01 MFD	R2	63-593	15 OHM	2	56901	OSC COIL
C8	22-933	0005 MFD	R3	63-578	1.5 OHM	3	55902	1ST I.F. TRANS
C9	22-936	03 MFD	R4	63-800	22 MEGOHM	4	56903	"
C10	22-934	20 MMFD ELECTROLYTIC	R5	63-1020	VOLUME CONTROL	5	56917	2ND I.F. TRANS
C11	22-934	20 "	R6	63-724	47 MEG OHM	6	56918	TO NE COUPLER. SWITCH
C12	22-934	20 "	R7	63-826	25V	7	100-39	BALLAST TUBE
C13	22-933	20 MFD	R8	63-597	470M OHM	8	100-39	PILOT LIGHT 25V 0.17A
C14	22-934	20 MFD	R9	63-686	150 OHM WIREWOUND	9	85-192	PHONO SWITCH