


Wilcox-Gay Corporation, Charlotte, Mich.  
SOCKET LAYOUT

Model A-52

### CODE OF SCHEMATIC DIAGRAM

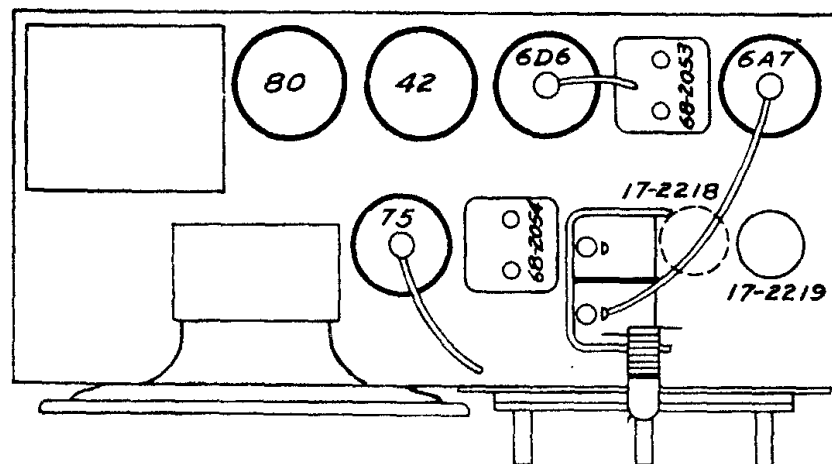

RESISTORS		
R1	53-898	50,000 Ohm 1/4 Watt Resistor
R2	53-941	20,000 Ohm 1/4 Watt Resistor
R3	53-926	1 Meg Ohm 1/4 Watt Resistor
R4	19-2007	500,000 Ohm Vol. Cont. & Switch
R5		60 Ohm
R6	53-2019	20 Ohm
R7		240 Ohm
R8	53-925	500,000 Ohm 1/4 Watt Resistor
R9	53-924	250,000 Ohm 1/4 Watt Resistor
R10	19-2009	250,000 Ohm Tone Control
R11	53-925	500,000 Ohm 1/4 Watt Resistor
R12	53-923	100,000 Ohm 1/4 Watt Resistor

CONDENSERS		
C1, C2	77-2014	Two Gang Variable Condenser
C3	76-2002	50 Mfd. Mica Condenser
C4	75-2005	.1 Mfd. 200 V. Paper Condenser
C5	75-2005	.1 Mfd. 200 V. Paper Condenser
C6	76-2005	.1 Mfd. 200 V. Paper Condenser

COND. (Cont.)		
C7	75-2003	.01 Mfd. 400 V. Paper Cond.
C8	18-2014	8 Mfd. 300 W.V. Elect. Cond.
C9	18-2013	4 Mfd. 300 W.V. Elect. Cond.
C10	78-307	.0005 Mfd. Mica Condenser
C11	75-2003	.01 Mfd. 400 V. Paper Cond.
C12	75-2014	.001 Mfd. 600 V. Paper Cond.
C13	75-2003	.01 Mfd. 400 V. Paper Cond.
C14	75-2003	.01 Mfd. 400 V. Paper Cond.
C15	75-2002	.004 Mfd. 600 V. Paper Cond.

INDUCTANCES		
L1	17-2218	Oscillator Coil Assembly
L2	17-2219	Preselector Coil Assembly
L3	68-2053	First I.F. Trans. Assembly
L4	68-2054	Second I.F. Trans. Assembly
L5	64-2057	6 1/2" Speaker, Output Trans. for 42 Tube
L6	64-2057	1500 Ohm Speaker Field
L7	80-2009	Power Transformer