


25-2110

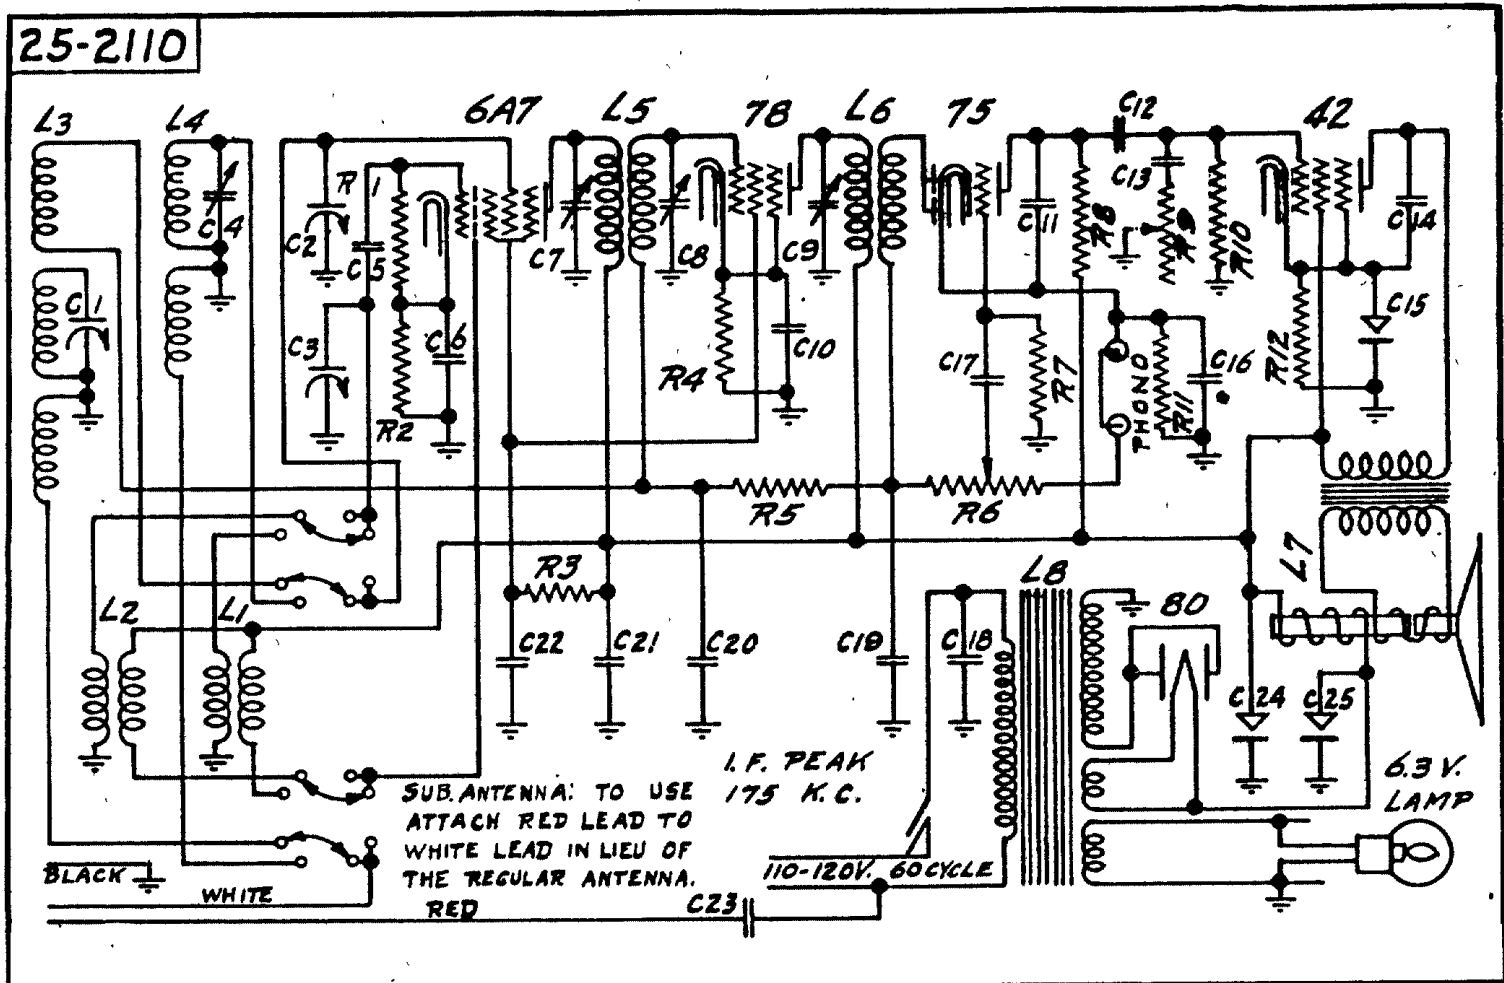

CODE PART NO.

RESISTORS

R1	53-898	50,000 Ohm	Oscillator Grid Resistor
R2	53-1062	250 Ohm	Oscillator Cathode Resistor
R3	53-1042	25,000 Ohm	6A7 & 78 Screen Resistor
R4	53-1063	500 Ohm	78 Cathode Resistor
R5	53-926	1 Meg Ohm	A.V.C. Network Resistor
R6	19-1291	500,000 Ohm	Volume Control & Switch
R7	53-925	500,000 Ohm	75 Grid Resistor
R8	53-924	250,000 Ohm	75 Plate Resistor
R9	19-1317	250,000 Ohm	Tone Control
R10	53-925	500,000 Ohm	42 Grid Resistor
R11	53-919	5,000 Ohm	75 Cathode Resistor
R12	53-1063	500 Ohm	42 Cathode Resistor

CONDENSERS


C1	77-833	16-366 MMFD.	Presselector Section of 3 Gang Cond.
C2	77-833	16-366 MMFD.	Presselector Section of 3 Gang Cond.
C3	77-833	16-328 MMFD.	Oscillator Section of 3 Gang Cond.
C4	78-2010	3-30 MMFD.	Foreign Band Pres. Trimmer Cond.
C5	76-2002	.00005 Mfd.	Mica Oscillator Grid Condenser
C6	75-2005	.1 Mfd. 200 V.	Paper 6A7 Cathode By-Pass Cond.
C7	78-2008		First I.F. Primary Trimmer Condenser
C8	78-2011		First I.F. Secondary Trimmer Condenser
C9	78-2009		Second I.F. Trimmer Condenser.
C10	75-2005	.1 Mfd. 200 V.	Paper 78 Cathode By-Pass Cond.
C11	76-662	.002 Mfd.	Mica 75 Plate Filter Condenser
C12	75-2003	.01 Mfd. 400 V.	Paper Audio Feed Condenser
C13	75-2003	.01 Mfd. 400 V.	Paper Tone Control Condenser
C14	75-2001	.002 Mfd. 600 V.	Paper 42 Plate Filter Cond.
C15	18-928	25 Mfd. 25 V.	Dry Electrolytic Condenser
C16	75-2005	.1 Mfd. 200 V.	Paper 75 Cathode By-Pass Cond.
C17	75-2003	.01 Mfd. 400 V.	Paper Audio Feed Condenser
C18	75-2003	.01 Mfd. 400 V.	Paper Line By-Pass Condenser
C19	76-307	.00005 Mfd.	Mica Diode Filter Condenser
C20	75-2005	.1 Mfd. 200 V.	Paper A.V.C. Network By-Pass Cond.
C21	75-2011	.5 Mfd. 200 V.	Paper B Supply By-Pass Condenser
C22	75-2005	.1 Mfd. 200 V.	Paper 6A7 & 78 Screen By-Pass Cond.
C23	75-2003	.01 Mfd. 400 V.	Paper Sub. Antenna Condenser
C24	18-2006	16 Mfd. 250 V.	Electrolytic Condenser
C25	18-2006	12 Mfd. 325 V.	Electrolytic Condenser

INDUCTANCES

L1	17-2095	Foreign Band Oscillator Coil Assembly
L2	17-2079	Broadcast Oscillator Coil Assembly
L3	17-2100	Broadcast Presselector Coil Assembly
L4	17-2096	Foreign Band Presselector Coil Assembly
L5	68-2012	First I.F. Transformer Assembly
L6	17-2102	Second I.F. Transformer Coil Assembly
L7	64-2021	5" Speaker, 1500 Ohm Field, #42 Tube Output Trans.
L8	80-2009	Power Transformer for 110-120 V. 60 Cycle

FOR USE ONLY WITH
110-120 V . 50-60 CYCLEPILOT LIGHTS 6.3 V.
I. F. PEAK 175 K.C.

LOCATION OF TUBES

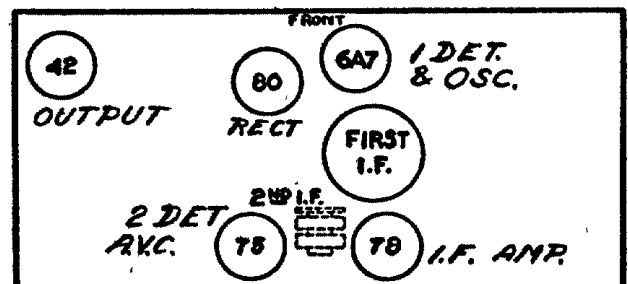

Models 6AC5 & 7AC5