


PUSH-PULL PWR. AMP.  
6V6G 6V6G


ZENITH RADIO CORPORATION CHASSIS No. 1207

Models 12S445—12S453—12S471—12S475—12S494

DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION
C1	22-981	THREE BAND VARIABLE	C24	22-928	02 MFD.	D19	63-678	27M OHM	A		12" I.F. TRANS. PRI
C2	22-824	05 MFD.	C26		TRIMMER COND. (SEE NOTE)	R19	63-1058	22M OHM	B		12" I.F. - SEC
C3	22-989	50 MMFD.							C		22" I.F. - PRI
C4	22-158	0001 MFD.	R1	63-597	470M OHM				D		22" I.F. - SEC
C5	22-988	05 MFD.	R2	63-598	100M OHM				E		BROADCAST OSC. (SEE NOTE)
C6	22-987	1 MFD.	R3	63-599	470 OHM				F		ANTENNA BROADCAST
C7	22-864	0005 MFD.	R4	63-605	1000 OHM				G		DETECTOR BROADCAST
C8	22-981	16 MFD. ELECTROLYTIC	R5	63-271	1 MEG OHM				H		SHORT WAVE OSC. (SEE NOTE)
C9	22-981	16 MFD.	R6	63-655	220M OHM				I		SHORT WAVE ANTENNA
C10	22-228	006 MFD.	R7	63-691	22M OHM				J		POLICE BAND OSC. (SEE NOTE)
C11	22-127	35M MFD.	R8	63-282	2200 OHM				K		SHORT WAVE ANTENNA
C12	22-358	008 MFD.	R9	63-648	47M OHM				L		POLICE BAND ANTENNA
C13	22-944	COMPENSATING COND.	R10	63-680	10M OHM				M		BROADCAST PADDER
C14	22-950	DUAL OSC. PADDER	R11	63-637	330M OHM				N		NOTE
C15	22-171	05 MFD.	R12	63-607	33M OHM				O		(1) TRIMMERS R1, R2, R3
C16	22-327	22 MFD.	R13	63-386	3300 OHM				P		ARE MOUNTED ON
C17	22-954	00035 MFD.	R14	63-1065	13M OHM				Q		STRIP #22-981
C18	22-474	00015 MFD.	R15	63-593	47M OHM				R		(2) TRIMMERS M1, M2
C19	22-448	006 MFD.	R16	63-1078	VOLUME CONTROL				S		ARE MOUNTED ON
C20	22-450	008 MFD.	R17	63-594	68M OHM				T		STRIP #22-982
C21	22-136	01 MFD.	R18	63-1052	2 SECTN W. CAND OHM				U		
C22	22-970	20 MFD. ELECTROLYTIC							V		
C23									W		

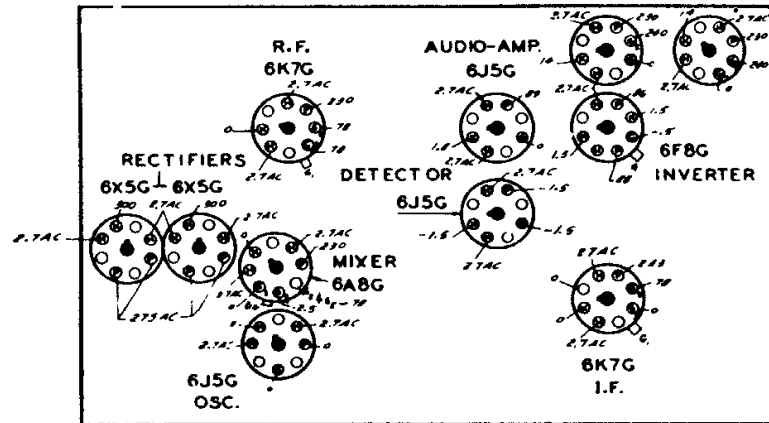

FRONT OF CHASSIS

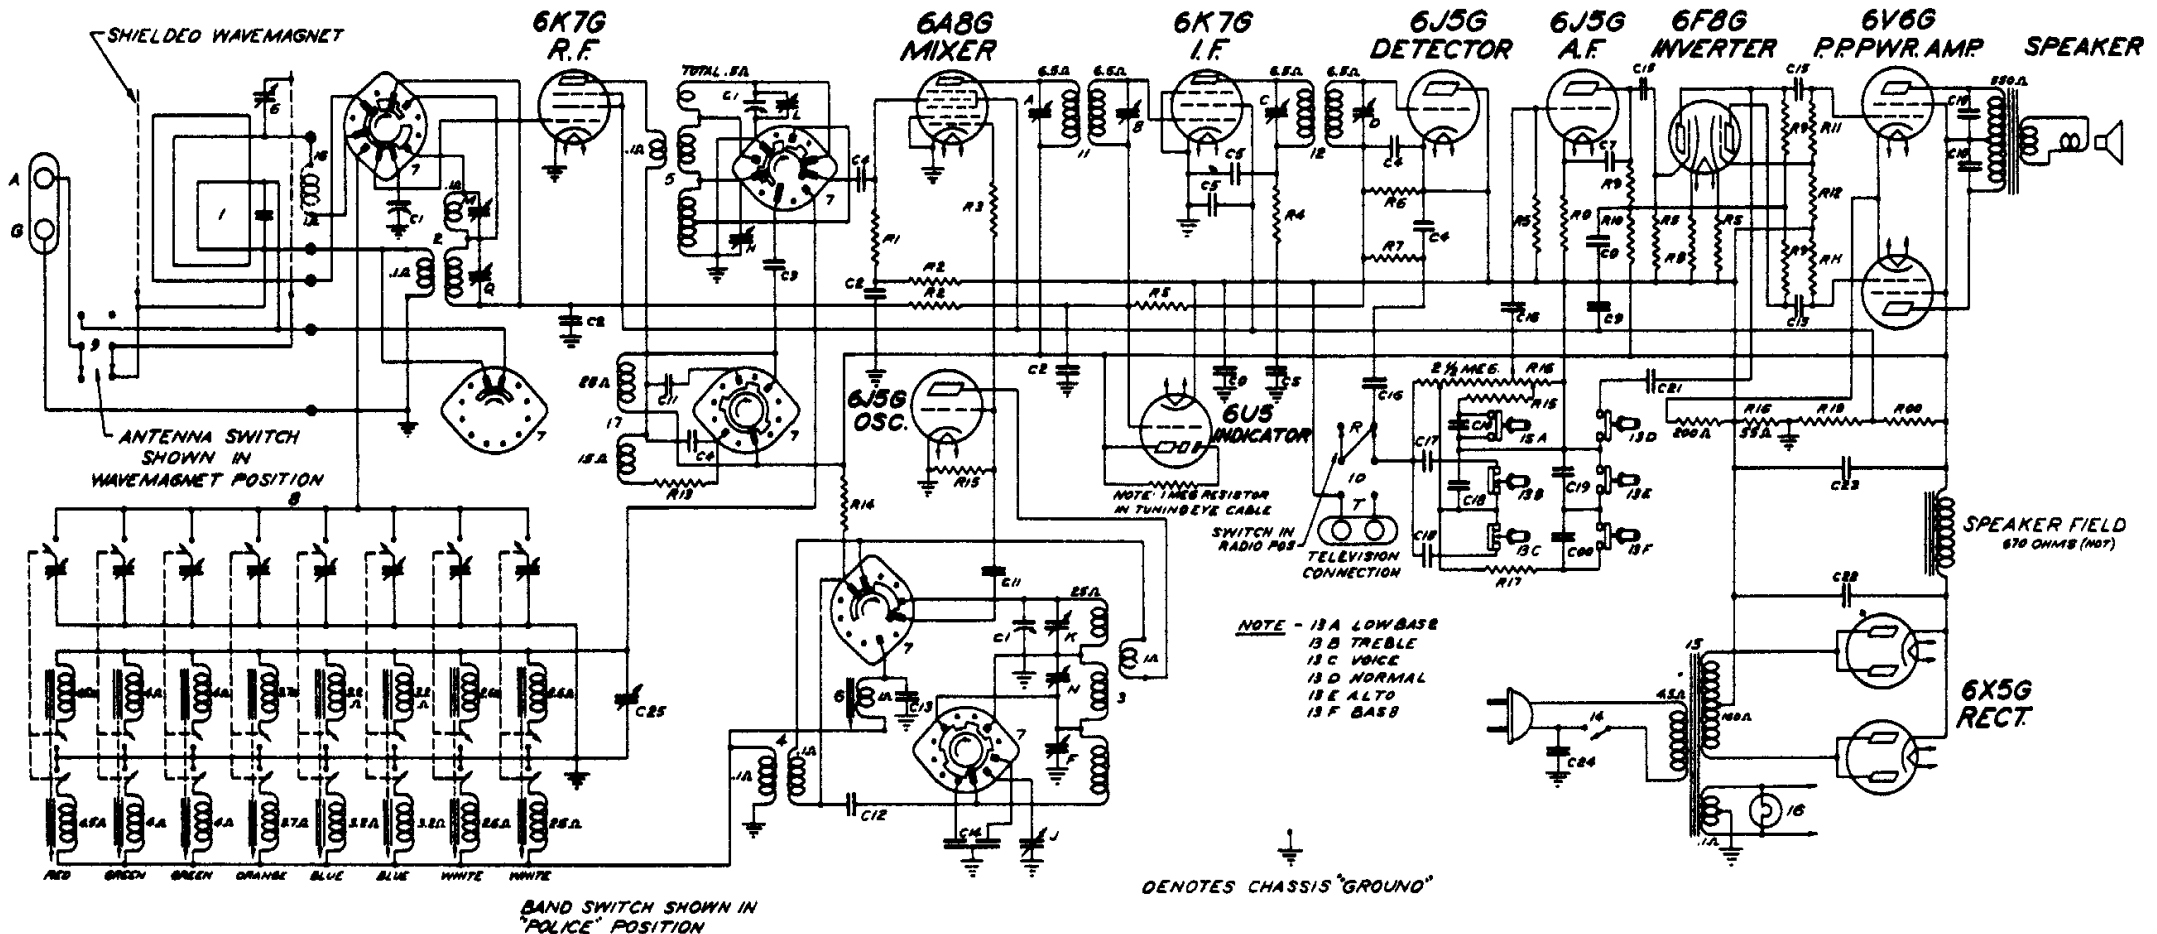

⊥ DENOTES CHASSIS "GROUND"

