

ZENITH RADIO CORP.


MODELS 908, 909, 960, 961, 1117
Chassis 5614

2ND DET.
A.V.C.
1ST A.F.
7.5
POWER
42

I.F.
6.06

O.S.C.
6.47

1ST R.F.
6.0-6

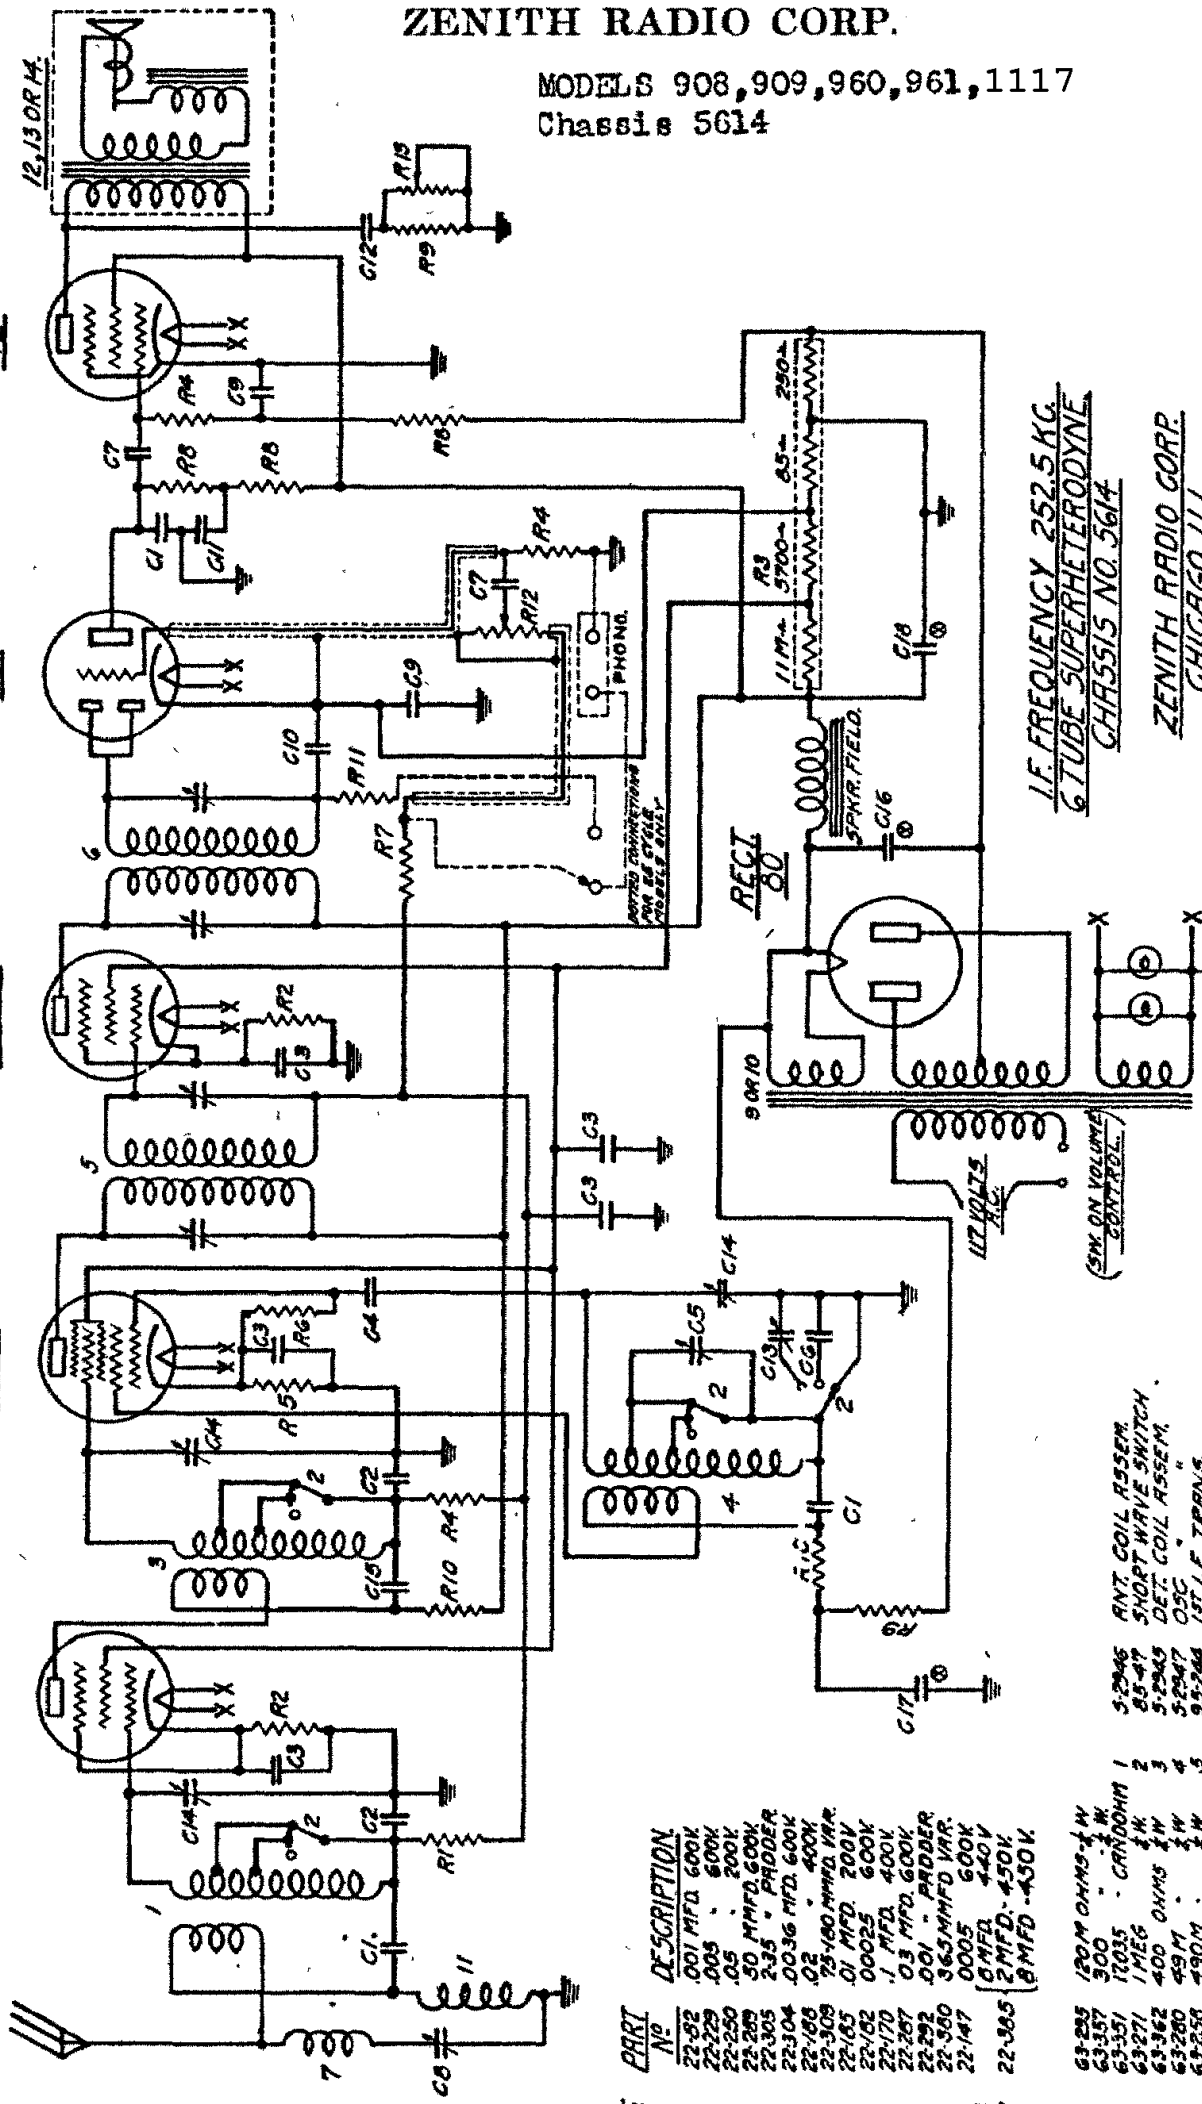

I.F. FREQUENCY 252.5 KC.
6 TUBE SUPERHETERODYNE
CHASSIS NO. 5614

ZENITH RADIO CORP.
CHICAGO, ILL.

January 31, 1935

CONVERTERS MARKED THIS @ ARE
IN SQUARE CONTAINER

MODEL 5-908-909-960-961

PART NO.	DESCRIPTION
22-52	.001 MFD. 600V.
22-229	.005 " 500V.
22-250	.05 " 200V.
22-289	50 M.MFD. 600V.
22-305	2.35 " PHOSPHOR
22-304	.0036 MFD. 600V.
22-188	.02 " 400V.
22-309	15-180 M.MFD. 100V.
22-185	.01 MFD. 200V.
22-170	.1 MFD. 400V.
22-287	.03 MFD. 600V.
22-292	.001 " PHOSPHOR
22-360	365 M.MFD. 100V.
22-147	.0005 " 600V.
C15	.01 MFD. 440V.
C16	2 MFD. 450V.
C17	8 MFD. 450V.

PART NO.	DESCRIPTION
63-235	120M OHMS 1/2 W.
63-357	300 " 1/2 W.
63-351	1000 " 1/2 W.
63-271	1 MEG. 1/2 W.
63-362	400 OHMS 1/2 W.
63-280	450M " 1/2 W.
63-250	490M " 1/2 W.
63-278	55M " 1/2 W.
63-353	19M " 1/2 W.
63-373	11M " 1/2 W.
63-325	51M " 1/2 W.
63-366	200M " 1/2 W.
63-316	50M " 1/2 W.

PART NO.	DESCRIPTION
52946	ANT. COIL ASSEM.
85-47	SHORT WAVE SWITCH
52945	DET. COIL ASSEM.
52947	O.S.C.
95-244	1ST I.F. TRANS.
95-245	2ND I.F.
20-75	WAVE TRAP CHOKES
85-48	100M OHMS 1/2 W.
95-234	100M OHMS 1/2 W.
95-235	100M OHMS 1/2 W.
20-71	ANT. CHOKES
49-79	8" SPARKER - FIELD 1000 (908-909)
49-85	10" " " (960)
49-97	12" " " (961)