


# STEWART-WARNER 11-6T and 11-6T-S CHASSIS

(Receiver Models 11-6T1 to 11-6T9 and 11-6T1-S to 11-6T9-S)

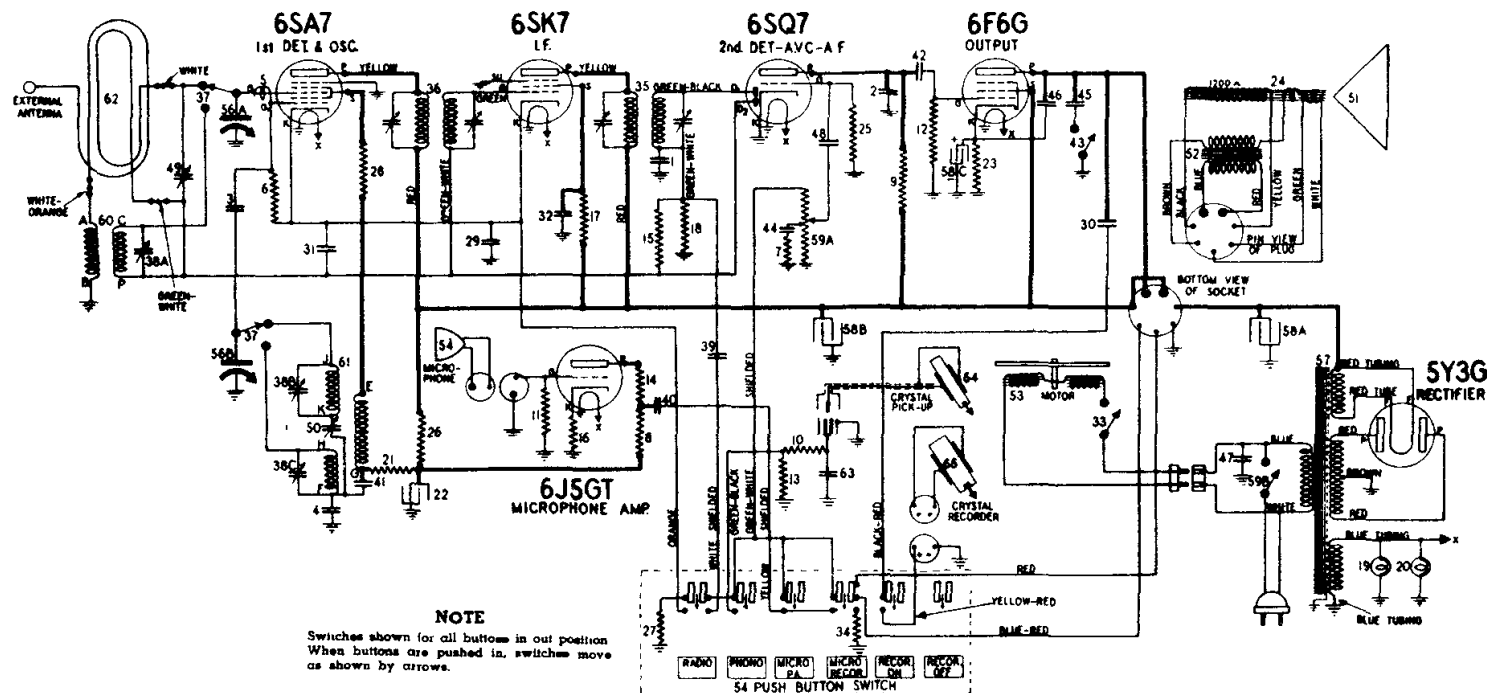

## ELECTRICAL PARTS


| Diagram Number | Part Number | Description                                   | List Price |
|----------------|-------------|---|------------|
| 1-2            | 83539       | Condenser—mica 250 mmfd.                      | \$0.20     |
| 3              | 88173       | Condenser—mica 50 mmfd.                       | .20        |
| 4              | 88587       | Condenser—mica 0042 mfd.                      | .35        |
| 5              | 110510      | Condenser—wire 3 mmfd.                        | .12        |
| 6-7-8          | 110552      | Resistor—carbon 47,000 ohms 1/4 watt          | .12        |
| 9-10           | 110553      | Resistor—carbon 220,000 ohms 1/4 watt         | .12        |
| 11             | 110554      | Resistor—carbon 1 megohm 1/4 watt             | .12        |
| 12             | 110559      | Resistor—carbon 470,000 ohms 1/4 watt         | .12        |
| 13             | 110564      | Resistor—carbon 100,000 ohms 1/4 watt         | .12        |
| 14             | 110565      | Resistor—carbon 22,000 ohms 1/4 watt          | .12        |
| 15             | 110570      | Resistor—carbon 22 meg. 1/4 watt              | .15        |
| 16             | 110573      | Resistor—carbon 2,200 ohms 1/4 watt           | .12        |
| 17             | 110578      | Resistor—carbon 68,000 ohms 1/4 watt          | .12        |
| 18             | 110584      | Resistor—carbon 330,000 ohms 1/4 watt         | .12        |
| 19-20          | 110829      | Dial light—6.3 volt                           | .15        |
| 21             | 112952      | Resistor—carbon 3,300 ohms 1/4 watt           | .10        |
| 22             | 114009      | Condenser—electrolytic 4 mfd. 350 volt        | .72        |
| 23             | 114335      | Resistor—wire wound 430 ohms 2 watts          | .20        |
| 24             | U-115107    | Speaker—dynamic 6"                            | 6.10       |
| 25             | 116050      | Resistor—insulated 10 meg. 1/4 watt           | .12        |
| 26             | 116055      | Resistor—carbon 22,000 ohms 1/4 watt          | .12        |
| 27-28          | 116062      | Resistor—150 ohms 1/4 watt                    | .12        |
| 29-30          | 116625      | Condenser—1 mfd. 600 volt                     | .25        |
| 31-32          | 116819      | Condenser—.05 mfd. 600 volt                   | .20        |
| 33             | 116964      | Switch—on-off for phono motor with escutcheon | .32        |
| 34             | 118819      | Resistor—5 ohms 1 watt wire wound             | .14        |
| 35             | 118024      | Transformer—2nd I.F.                          | 1.15       |
| 36             | 119042      | Transformer—1st I.F.                          | 1.10       |
| 37             | 119005      | Range switch                                  | .50        |

| Diagram Number | Part Number | Description   | List Price |
|----------------|-------------|---|------------|
| 38A to 38C     | 119174      | Condenser—trimmer—3 section                               | .45        |
| 39-40-41-42    | 119193      | Condenser—.01 mfd. 600 volt                               | .15        |
| 43             | 119214      | Switch—tone control                                       | .48        |
| 44-45          | 119414      | Condenser—.02 mfd. 600 volt                               | .15        |
| 46             | 119416      | Condenser—.008 mfd. 600 volt                              | .15        |
| 47             | 119757      | Condenser—(metal clad) 01 mfd. 600 volt                   | .20        |
| 48             | 119817      | Condenser—.004 mfd. 600 volt                              | .15        |
| 49             | 119845      | Condenser—trimmer (on loop)                               | .16        |
| 50             | 119934      | Condenser—padder  | .36        |
| 51             | U-160028    | Cone & voice coil for U-115107 speaker                    | 1.80       |
| 52             | U-160029    | Transformer—output for U-115107 speaker                   | 1.55       |
| 53             | 1160036     | Motor (less turntable)                                    | 8.00       |
| 54             | 1160038     | Microphone  | 12.50      |
| 55             | 1160111     | Push button switch  | 2.30       |
| 56A 56B        | 1160170     | Condenser—variable tuning                                 | 2.40       |
| 57             | 1160172     | Transformer—power (50-60 cycles)                          | 4.20       |
| 58A to 58C     | 1160174     | Condenser—electrolytic                                    |            |
|                |             | Section A—.20 mfd. 400 volt                               | 1.30       |
|                |             | Section B—.15 mfd. 400 volt                               | 1.30       |
|                |             | Section C—.10 mfd. 25 volt                                | 1.40       |
| 59A 59B        | 1160175     | Volume control—1 meg. (with switch)                       | 1.40       |
| 60             | 1160180     | Coil—antenna (S.W.)                                       | .44        |
| 61             | 1160195     | Coil—oscillator   | .75        |
| 62             | 1160279     | Loop antenna & cabinet back (complete) (Model 11-6T9)     | 1.40       |
|                | 1160783     | Loop antenna & cabinet back (with trimmer) (Model 11-6T9) | 1.40       |
| 63             | 1160430     | Condenser—.001 mfd. 600 volt                              | .15        |
| 64             | 1161298     | Crystal Pickup Cartridge                                  | 5.00       |
| 65             | 1161298     | Crystal Recorder Cartridge                                | 9.50       |


PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

## DIAL AND MISCELLANEOUS PARTS

| Part Number | Description                             | List Price |
|-------------|---|------------|
| 117117      | Cable—motor                             | \$0.38     |
| 114955      | Clamp—for dial cord                     | .01        |
| 113019      | Clip—dial scale retaining               | .01        |
| 117057      | Cord—drive (supplied in 3 ft. lengths)  | .15        |
| 160200      | Dial scale                              | .28        |
| 119208      | Escutcheon—dial                         | .80        |
| 118165      | Knob                                    | .08        |
| 117769      | Knob—push button                        | .08        |
| 117779      | Name Plate (S.W.) (Model 11-6T8)        | .07        |
| 117780      | Name Plate (OH.Vol.) (Model 11-6T8)     | .05        |
| 161206      | Name Plate (Tuning) (Model 11-6T8)      | .05        |
| 161207      | Name Plate (F.B.) (Model 11-6T8)        | .06        |
| 160033      | Needle cup                              | .88        |
| 160127      | Phonograph needles Envelope of 10       | 10         |
| 116883      | Pointer                                 | .16        |
| 81145       | Retaining ring for drive shaft          | Per C 50   |
| 119218      | Screw—escutcheon mounting               | .02        |
| 119204      | Shalt—tuning                            | .10        |
| 111008      | Socket—dial lamp                        | .12        |
| 160037      | Socket—2 prong                          | .10        |
| 160171      | Socket—4 prong                          | .12        |
| 160158      | Socket—7 prong for speaker              | .14        |
| 119791      | Socket—8 prong                          | .12        |
| 114876      | Socket—octal                            | .15        |
| 160039      | Socket for pick up                      | .08        |
| 113177      | Spring—dial cord tension                | .88        |
| 161245      | Tab & windows for recorder push buttons | .10        |
| 111456      | Washer—spring washer                    | Per C 50   |

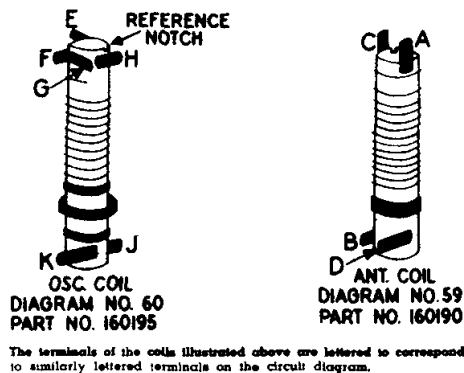


## MAGIC ANTENNA CONNECTIONS



## SOCKET VOLTAGES

VOLUME ON FULL WITH NO SIGNAL

DIAL TUNED TO 540 KC.

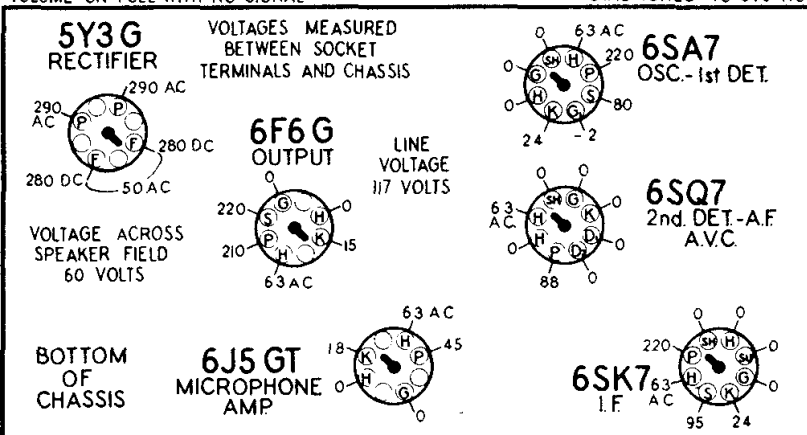

Use a high resistance voltmeter of 1000 oms per volt.