


S: 6, 7, 29, 30, 31, 1, 2, 3, 4, 8, 9, 10, 11, 12, 13,	14, 16, 15, 17, 18, 19, 20, 21,	22, 23, 24,	25, 26, 27
C: 3, 7, 10, 14, 7, 17, 38, 15, 16, 11, 8, 1, 2, 32, 13,	29, 9, 12, 40, 19, 20, 31,	4, 21, 5, 22, 6, 39, 23,	X, 24, 26, 27, 25, 28, 30, 35
R: 2, 4, 14, 1, 6, 26,	21, 19, 3, 25,	7, 20, 8, 10, 9,	11, 12, 13, 15, 5, 17, 18

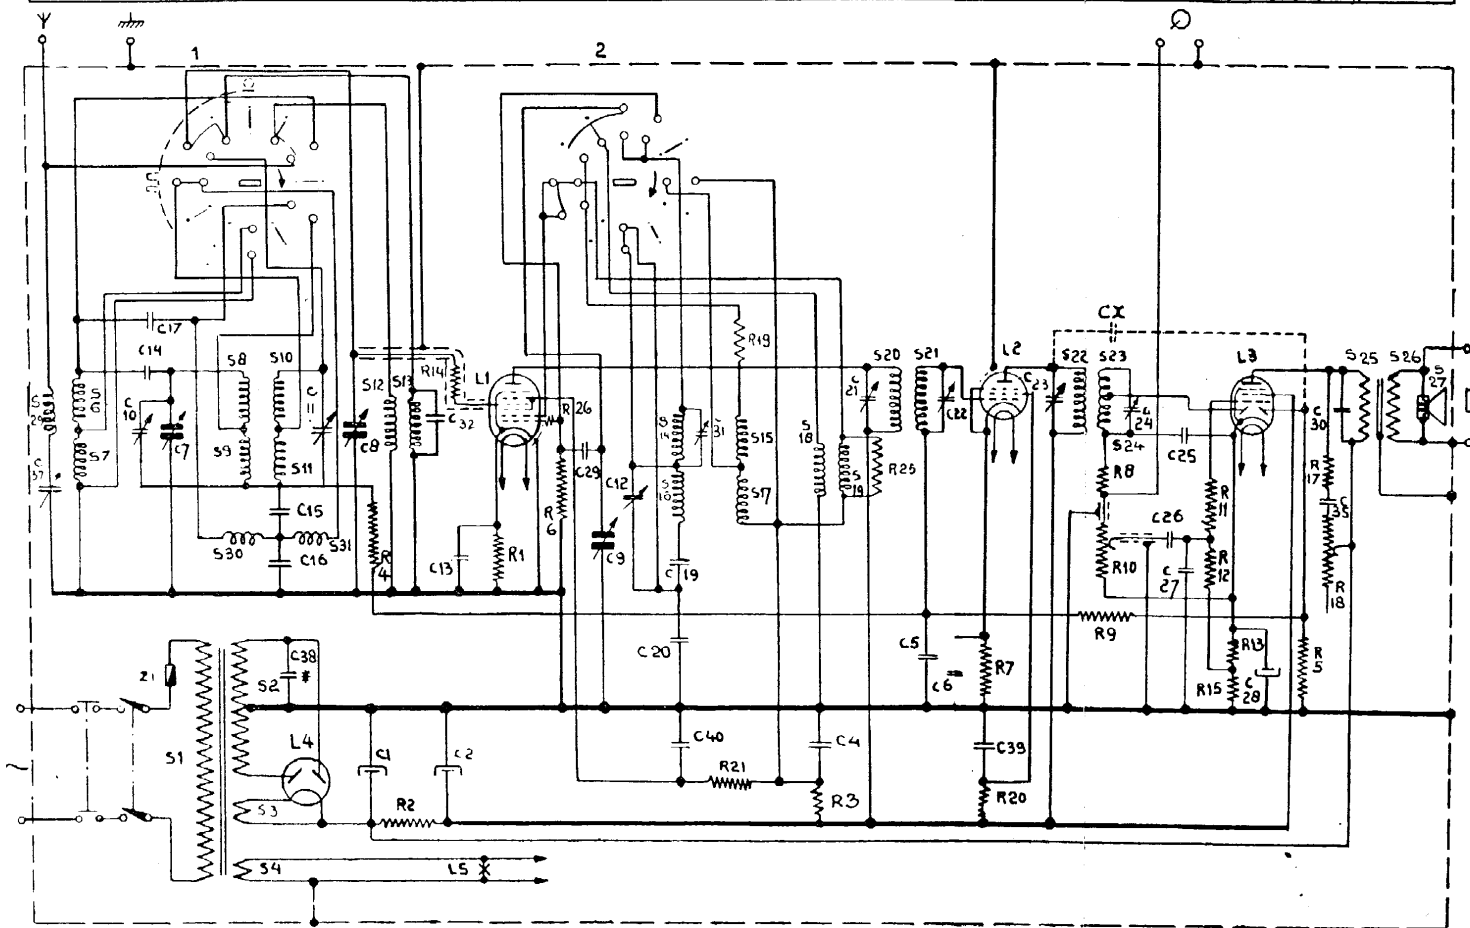

Le commutateur de longueur d'onde dans la position ondes courtes

Fig. 12

* Voir condensateurs.

RESISTANCES

No.	Valeur	No. de Code	Prix	No.	Valeur	No. de Code	Prix
R1	400 ohm	28.770.210		R12	1 M.ohm	28.770.550	
R2	2000 ohm	28.802.660		R13	160 ohm	28.770.170	
R3	25000 ohm	28.770.390		R14	50 ohm	28.773.570	
R4	0,1 M.ohm	28.770.450		R15	80 ohm	28.770.140	
R5	0,5 M.ohm	28.770.520		R17	100 ohm	28.773.600	
R6	50000 ohm	28.770.420		R18	50000 ohm	49.471.000	
R7	320 ohm	28.770.200		R19	4000 ohm	28.770.310	
R8	0,1 M.ohm	28.770.450		R20	80000 ohm	28.770.440	
R9	2 M.ohm	28.771.230		R21	0,16 M.ohm	28.770.470	
R10	0,5 M.ohm	49.500.010		R25	20000 ohm	28.770.380	
R11	10000 ohm	28.770.350		R26	40 ohm	28.770.110	

CONDENSATEURS

No.	Valeur	No. de Code	Prix
C1	32 μ F	28.182.400	
C2	32 μ F	28.182.400	
C4	50000 μ F	28.199.060	
C5	50000 μ F	28.199.060	
C6	50000 μ F	28.199.060	
C7	11-490 μ F		
C8	11-490 μ F	28.212.300	
C9	11-490 μ F		
C10	30 μ F	Voir Bobines	
C11	30 μ F	Voir Bobines	
C12	30 μ F	28.212.060	
C13	50000 μ F	28.199.060	
C14	16 μ F	28.206.360	
C15	12500 μ F	28.199.000	
C16	40000 μ F	28.199.050	
C17	40 μ F	28.206.230	
C19	680 μ F	49.080.000 ³⁾	
C19	775 μ F	49.080.300 ²⁾	
C20	1575 μ F	28.195.940 ¹⁾	
C20	1379 μ F	49.080.310 ²⁾	
C21	70+30 μ F	28.212.460	
C22	70+30 μ F	Voir Bobines	
C23	70+30 μ F	28.212.460	
C24	70+30 μ F	Voir Bobines	
C25	80 μ F	28.206.260	
C26	10000 μ F	28.198.990	
C27	80 μ F	28.206.260	
C28	50 μ F	28.182.320	
C29	50 μ F	28.206.240	
C30	2000 μ F	28.201.480	
C31	70+30 μ F	Voir Bobines	
C32	12,5 μ F	28.206.350	
C35	50000 μ F	28.201.640	
C37	70+30 μ F	28.212.460	
C38	20000 μ F	28.201.650 [*]	
C39	50000 μ F	28.199.060	
C40	50000 μ F	28.199.060	

Cx Spires autour de la connexion de l'anode

* Ne s'applique pas aux appareils ayant un transformateur d'alimentation à bobines séparées (voir pag. G2).

LAMPES

L1	L2	L3	L4	L5
EK2	EF9	EBL1	AZ1	8045D-00