

High-vacuum HALF-WAVE RECTIFIER
REDRESSEUR MONOPLAQUE à vide poussé
Hochvakuum EINWEGGLEICHRICHTERRÖHRE

Heating : indirect by A.C. or D.C.
series supply

Chauffage: indirect par C.A. ou C.C.
alimentation série

Heizung : indirect durch Wechsel-
oder Gleichstrom; Serien-
speisung


$V_f = 31 \text{ V}$

$I_f = 100 \text{ mA}$

Dimensions in mm

Dimensions en mm

Abmessungen in mm



Base, culot, Sockel: Noval

Operating characteristics
Caractéristiques d'utilisation
Betriebsdaten


V_1	=	110	127	220	250	V_{eff}
I_o	=	100	100	100	100	mA
C_{filt}	=	50	50	50	50	μF
R_t	=	0	0	160	210	Ω
V_o	=	113	135	188	205	V

Limiting values
Caractéristiques limites
Grenzdaten

V_{invp}	=	max. 700 V
I_o	=	max. 100 mA
I_{ap}	=	max. 600 mA
V_{kfp} (k pos., f neg.)	=	max. 550 V
V_1	=	110 127 220 250 V_{eff}
R_t	=	min. 0 0 160 210 Ω

PHILIPS

UY 89

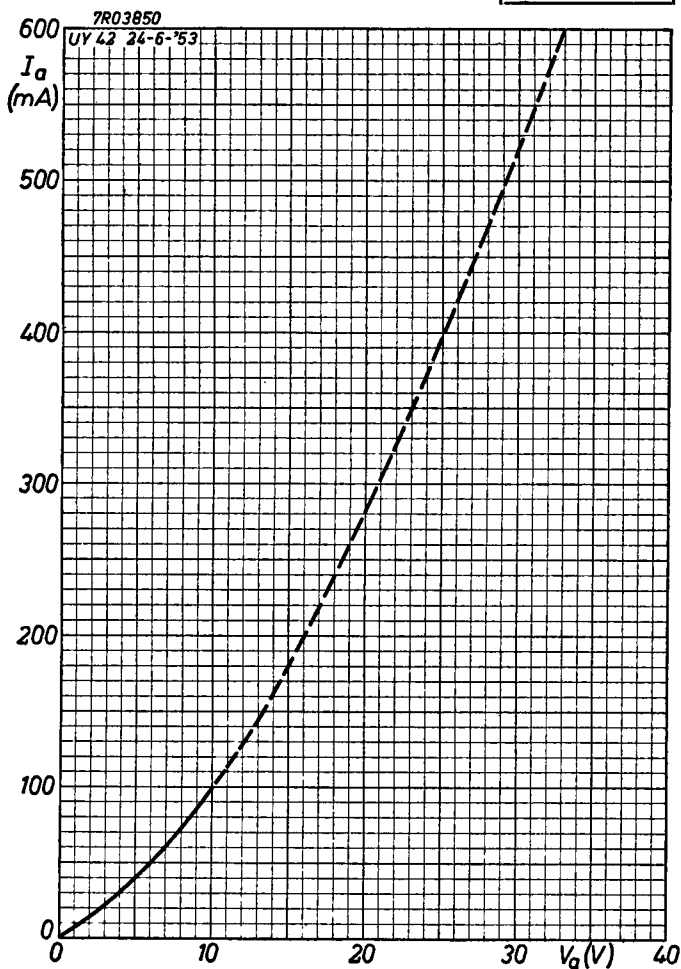


1.1.1960

A

UY 89**PHILIPS**

7R03851

UY 42 24-6-53

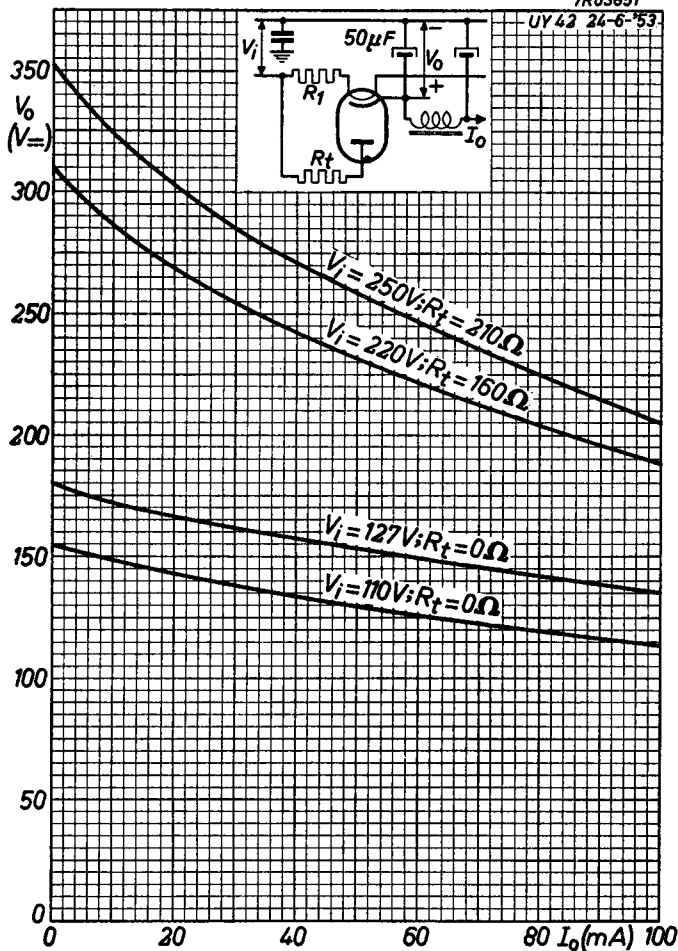



	UY89	
page	sheet	date
1	1	1960.01.01
2	A	1960.01.01
3	B	1960.01.01
4	FP	2000.07.09